


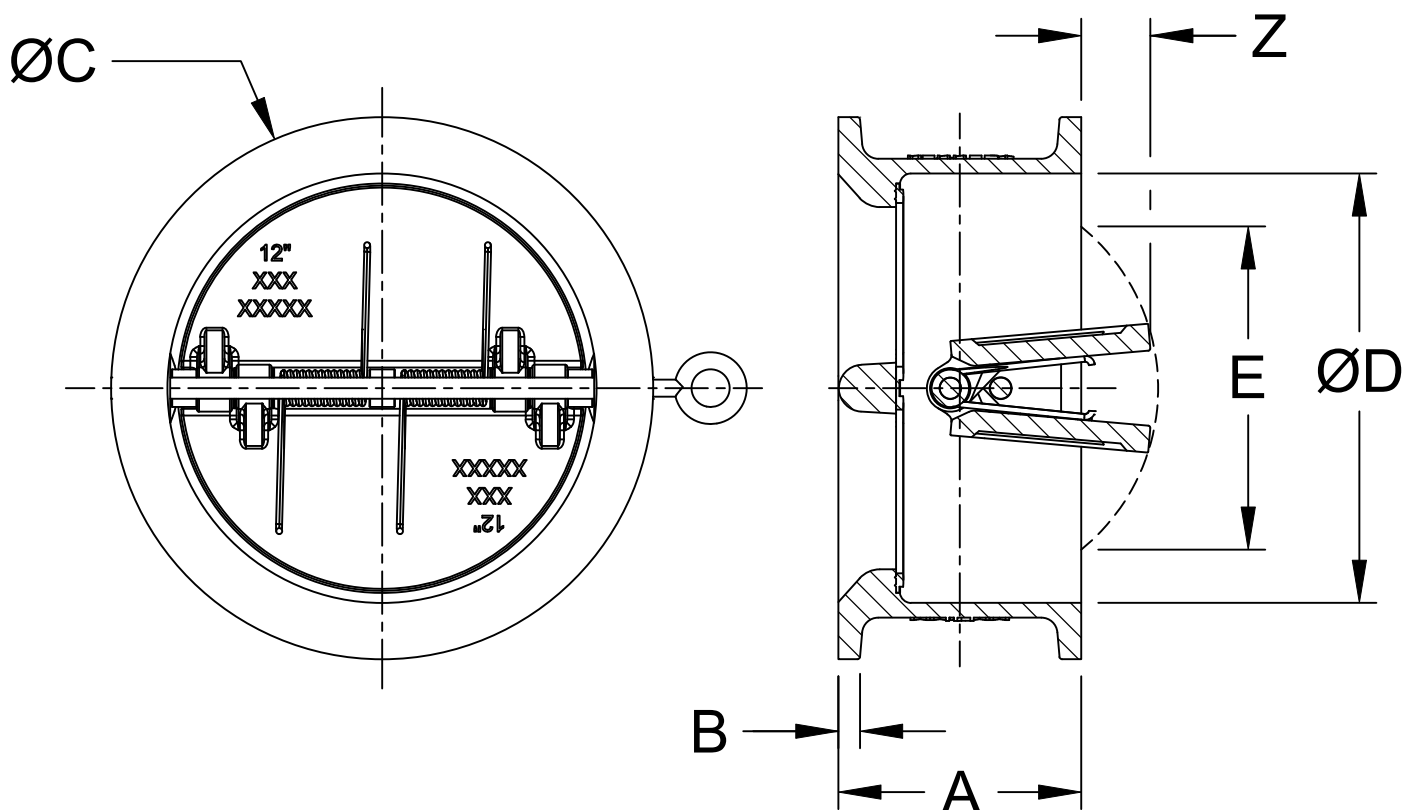

DIMENSIONS (Inches)							
SIZE	A	B	C	D	E	Z	WT (lbs)
2	2.13	0.40	3.94	2.91	1.70	0.20	4
2.5	2.37	0.41	4.69	3.20	2.13	0.31	5
3	2.63	0.45	5.18	3.86	2.59	0.42	7
4	2.63	0.47	6.67	4.69	3.73	0.91	11
6	3.75	0.51	8.54	6.77	5.70	1.48	22
8	5.00	0.54	10.79	8.66	6.59	1.43	39
10	5.51	0.63	13.15	10.63	8.78	2.32	64
12	7.13	0.63	15.91	12.60	9.48	2.03	105
14	7.24	0.69	17.52	14.65	12.13	3.24	132
16	7.52	0.73	20.00	16.22	13.96	4.08	186
18	7.99	0.79	21.42	18.27	16.20	5.05	231
20	8.40	0.85	23.62	20.16	18.08	5.80	305
24	8.74	0.95	27.99	24.33	22.30	7.79	439

NOTE:

1. FITS BETWEEN ANSI B16.1 CLASS 125 FLANGES.
2. COLD WORKING PRESSURE - 250 PSI
3. HYDROSTATIC TEST PRESSURE - 500 PSI

DESCRIPTION:

2"-24" AWWA C518 Double Disc Check Valve

DATE:

08/01/2024

DRAWING:

DD-DD0001-A

MPi MCWANE
PLANT & INDUSTRIAL

McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

