


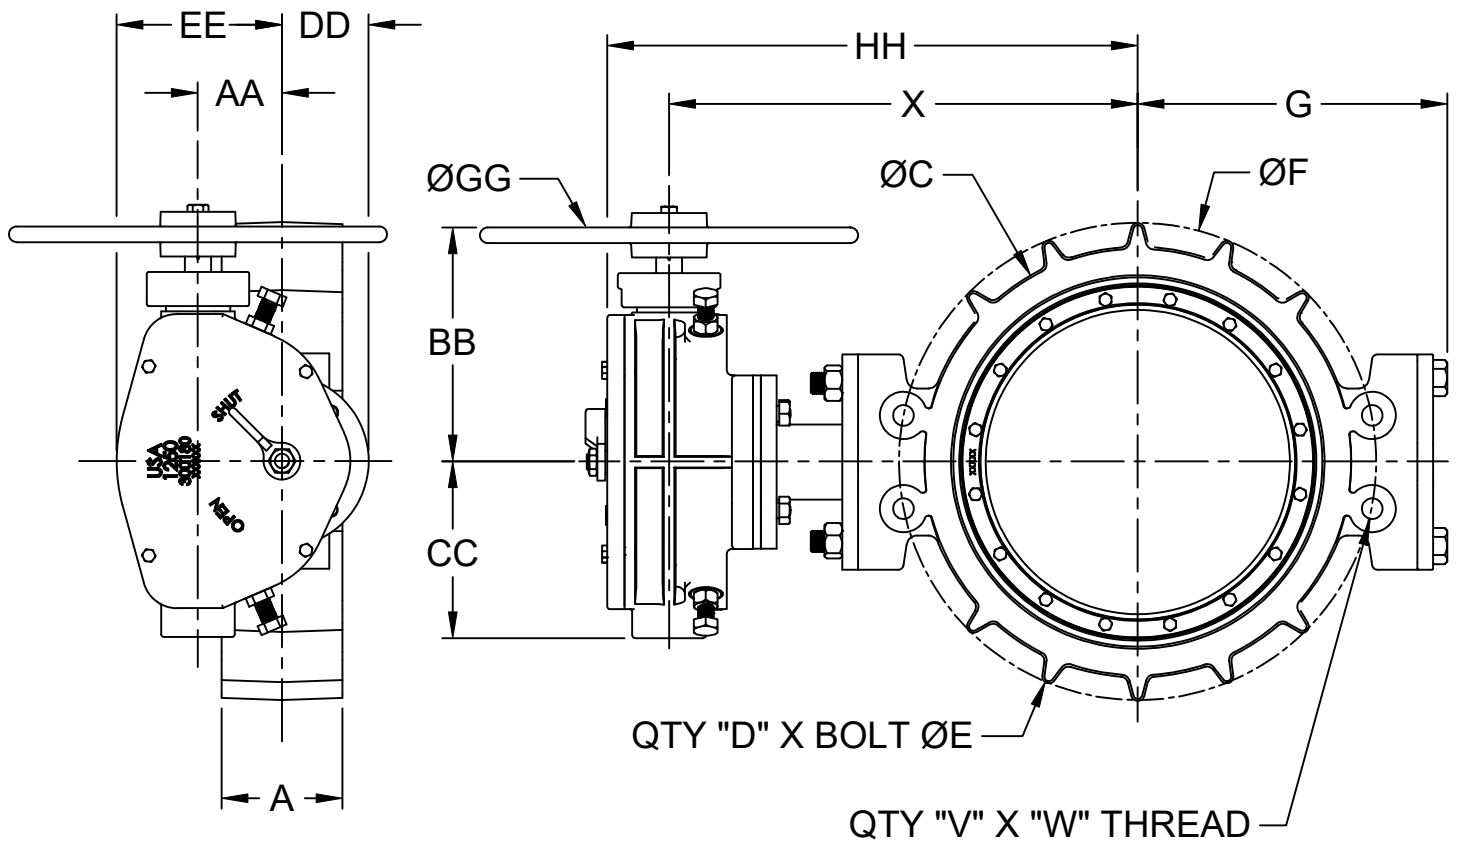

DIMENSIONS (Inches)

SIZE	A	C	D	E	F	G	V	W	X	AA	BB	CC	DD	EE	GG	HH	WT (lbs)	ACT. MODEL	TURNS TO OPEN
4	2.50	5.38	8	5/8"	7.50	4.81	-	-	10.63	1.63	7.81	5.56	3.06	3.69	10.00	12.50	75	450	29
6	2.56	7.50	8	3/4"	9.50	6.00	-	-	11.63	1.63	7.81	5.56	3.06	3.69	10.00	13.50	95	450	29
8	2.81	9.63	8	3/4"	11.75	6.88	-	-	12.63	1.63	7.81	5.56	3.06	3.69	10.00	14.50	140	450	29
10	3.25	11.75	12	7/8"	14.25	8.88	-	-	14.38	1.63	7.81	5.56	3.06	3.69	10.00	16.25	232	450	29
12	3.31	14.13	12	7/8"	17.00	10.63	-	-	16.13	1.63	7.81	5.56	3.06	3.69	10.00	18.00	300	450	29
14	4.50	16.00	12	1"	18.75	11.88	-	-	19.44	4.00	11.88	8.38	4.13	7.88	18.00	22.38	485	1250	48
16	4.50	18.25	16	1"	21.25	13.63	-	-	21.20	4.00	11.88	8.38	4.13	7.88	18.00	24.13	570	1250	48
18	5.75	20.30	16	1 1/8"	22.75	14.75	4	1 1/8"-7 11.38	22.30	4.00	11.88	8.38	4.13	7.88	18.00	25.25	735	1250	48
20	5.75	22.75	20	1 1/8"	25.00	16.30	4	1 1/8"-7 11.75	23.88	4.00	11.88	8.38	4.13	7.88	18.00	26.82	860	1250	48

NOTE:

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE
150B - 150PSI, 250B - 250PSI
3. HYDROSTATIC TEST PRESSURE
150B - 300PSI, 250B - 500PSI

DESCRIPTION:

4"-20" AWWA 150B - Wafer BFV w/ Traveling Nut Actuator (Seat on Disc - 4500)

DATE:

01/15/2025

DRAWING:

BF-DD0030-A

MPi MCWANE
PLANT & INDUSTRIAL

McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

