


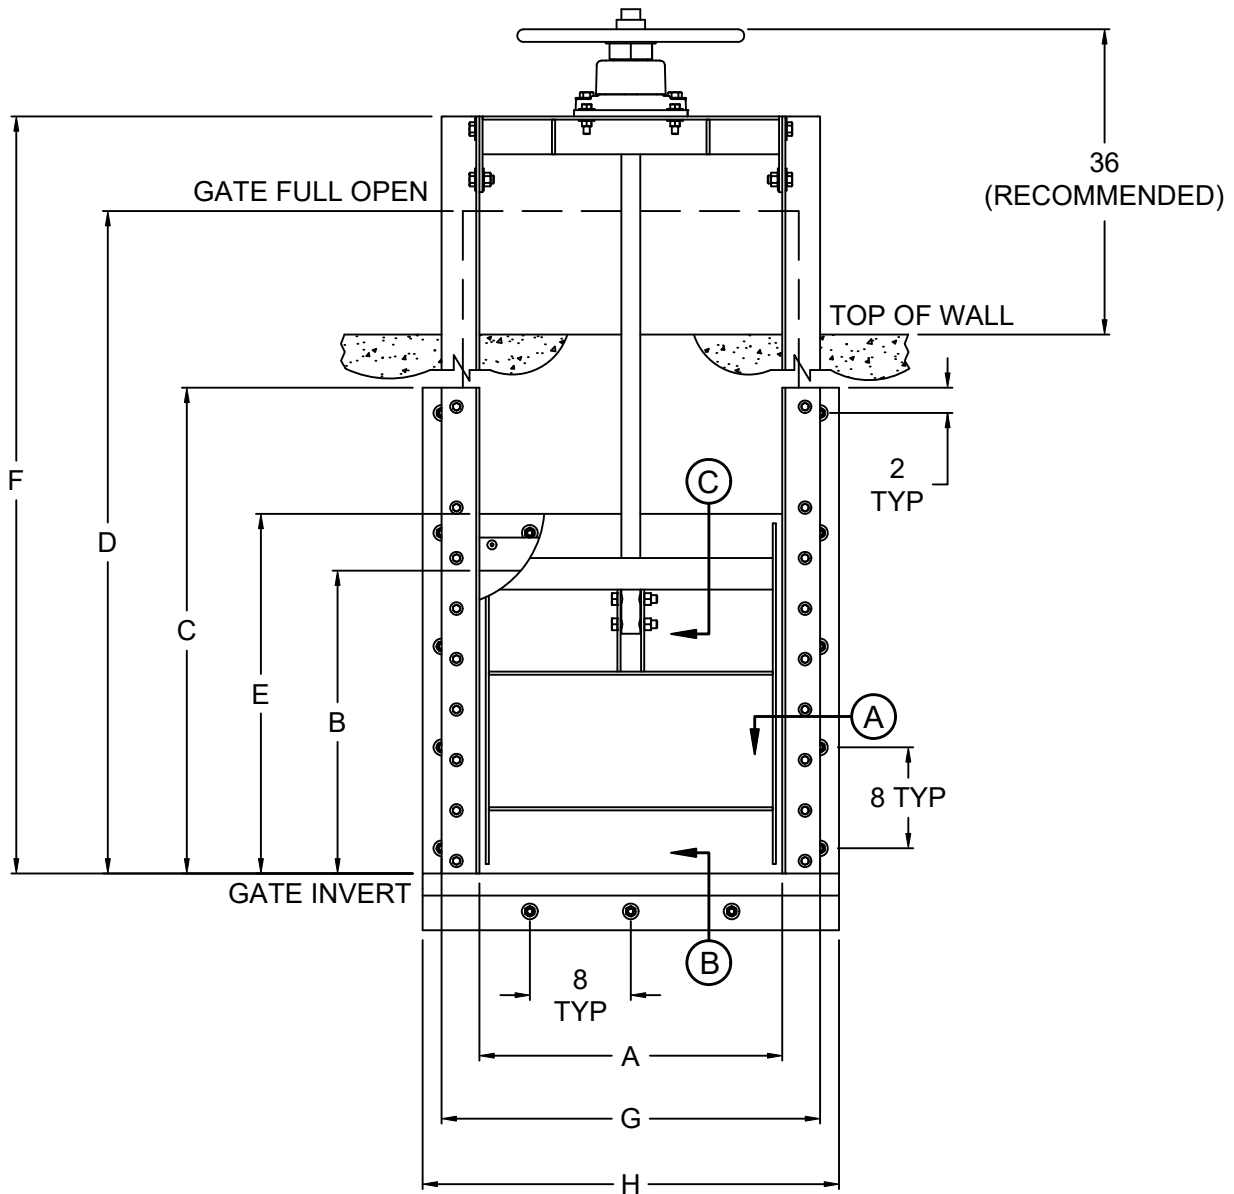

DIMENSIONS - INCHES (")				
DESCRIPTION		MIN	MAX	REQ
A	GATE OPENING WIDTH	6.00	72.00	
B	GATE OPENING HEIGHT	6.00	72.00	
C	GUIDE RAIL HEIGHT = $(E/2) + B$	11.25	110.25	
D	GATE FULL OPEN = $2B + 4-1/2$	16.50	148.50	
E	SLIDE HEIGHT = $B + 4-1/2$	10.50	76.50	
F	SELF-CONTAINED MIN FRAME HEIGHT = $D + 11-1/2$		180.00	
G	ANCHOR TO ANCHOR = $A + 6$	12.00	78.00	
H	FRAME WIDTH = $A + 9$	15.00	81.00	

DESCRIPTION:
 SS-251 Stainless Steel Slide Gate
 4-Sided Wall Mount - Upward Opening


DATE:
 07/08/2025

DRAWING:
 SS-DD0001-A


MPi MCWANE
 PLANT & INDUSTRIAL

McWane Plant & Industrial
 25500 Road 204
 Exeter, CA 93221


Waterman

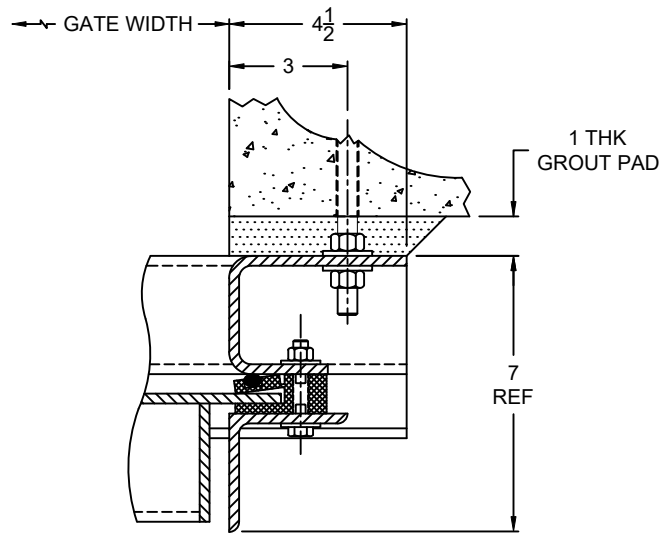


SECTION VIEW - A
FACE MOUNTED GUIDE RAIL

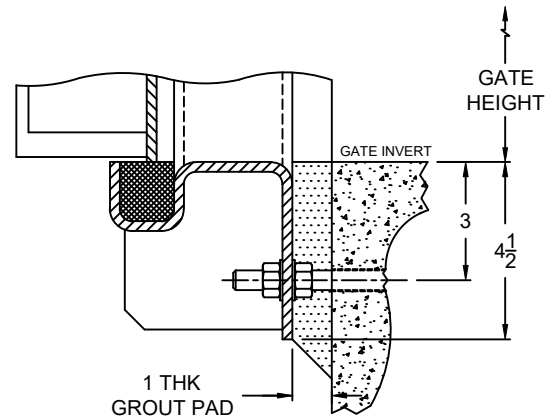


SECTION VIEW - B
FACE MOUNTED FLUSHBOTTOM RAIL
(STANDARD)

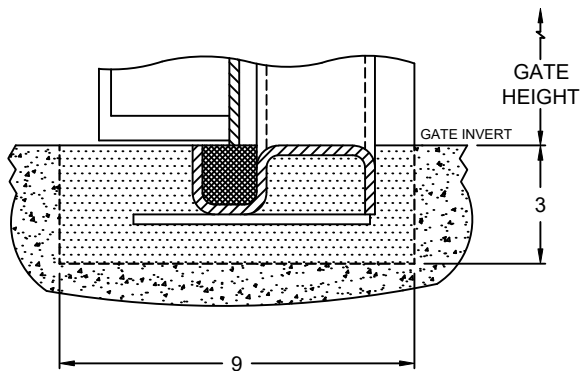


SECTION VIEW - B
EMBEDDED FLUSHBOTTOM RAIL
(OPTIONAL)

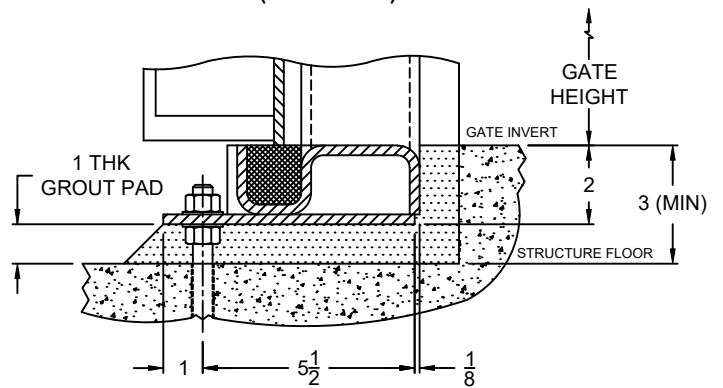

SECTION VIEW - B
SURFACE MOUNTED FLUSHBOTTOM RAIL
(OPTIONAL)

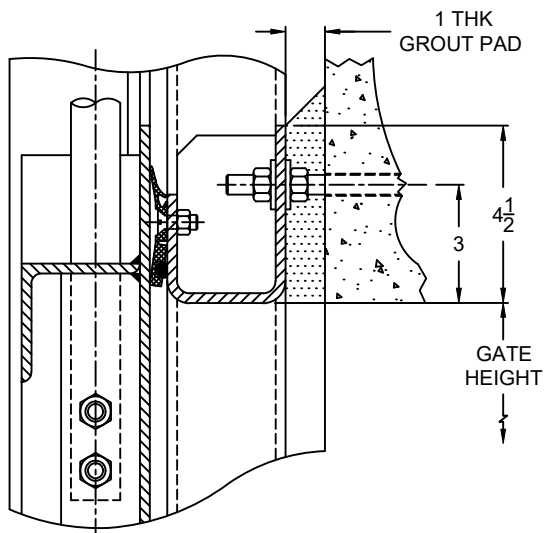

SECTION VIEW - C
CROSS RAIL
(STANDARD RISING STEM)

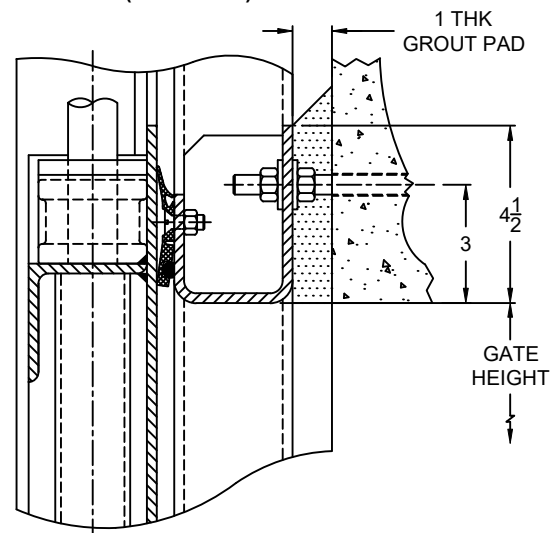

SECTION VIEW - C
CROSS RAIL
(OPTIONAL NON-RISING STEM)

DESCRIPTION:

SS-251 Stainless Steel Slide Gate
4-Sided Wall Mount - Upward Opening

DATE:

07/08/2025

DRAWING:

SS-DD0001-A

MPi MCWANE
PLANT & INDUSTRIAL

McWane Plant & Industrial
25500 Road 204
Exeter, CA 93221

Waterman