

# ECCENTRIC PLUG VALVES



- AWWA C517
- 3"-48"
- 100% RECTANGULAR PORT

## MARKETS



WATER/  
WASTEWATER




INDUSTRIAL

## SPECIFICATIONS

Size Range	3"-48"
Materials	Ductile iron ASTM A536, 95% pure nickel welded seat, NBR encapsulated plug
Pressure Rating	3"-12" to 175psi; 14"-48" to 150psi
Temperature Range	0°F-250°F
Body Style	FLG or MJ
Actuator Types	Direct nut (8" & smaller), worm gear, electric motor, pneumatic, hydraulic
Standards	AWWA C517
Install Orientation	Horizontal or vertical
Featured Applications	Treatment plants, lift stations, buried/vault, irrigation, force mains, pump isolation, on/off, throttling, modulating
Water Service	Raw water, industrial wastewater, industrial water, primary effluent, secondary effluent, raw sewage, screened sewage, slurries/grit



# ENGINEERING FEATURES

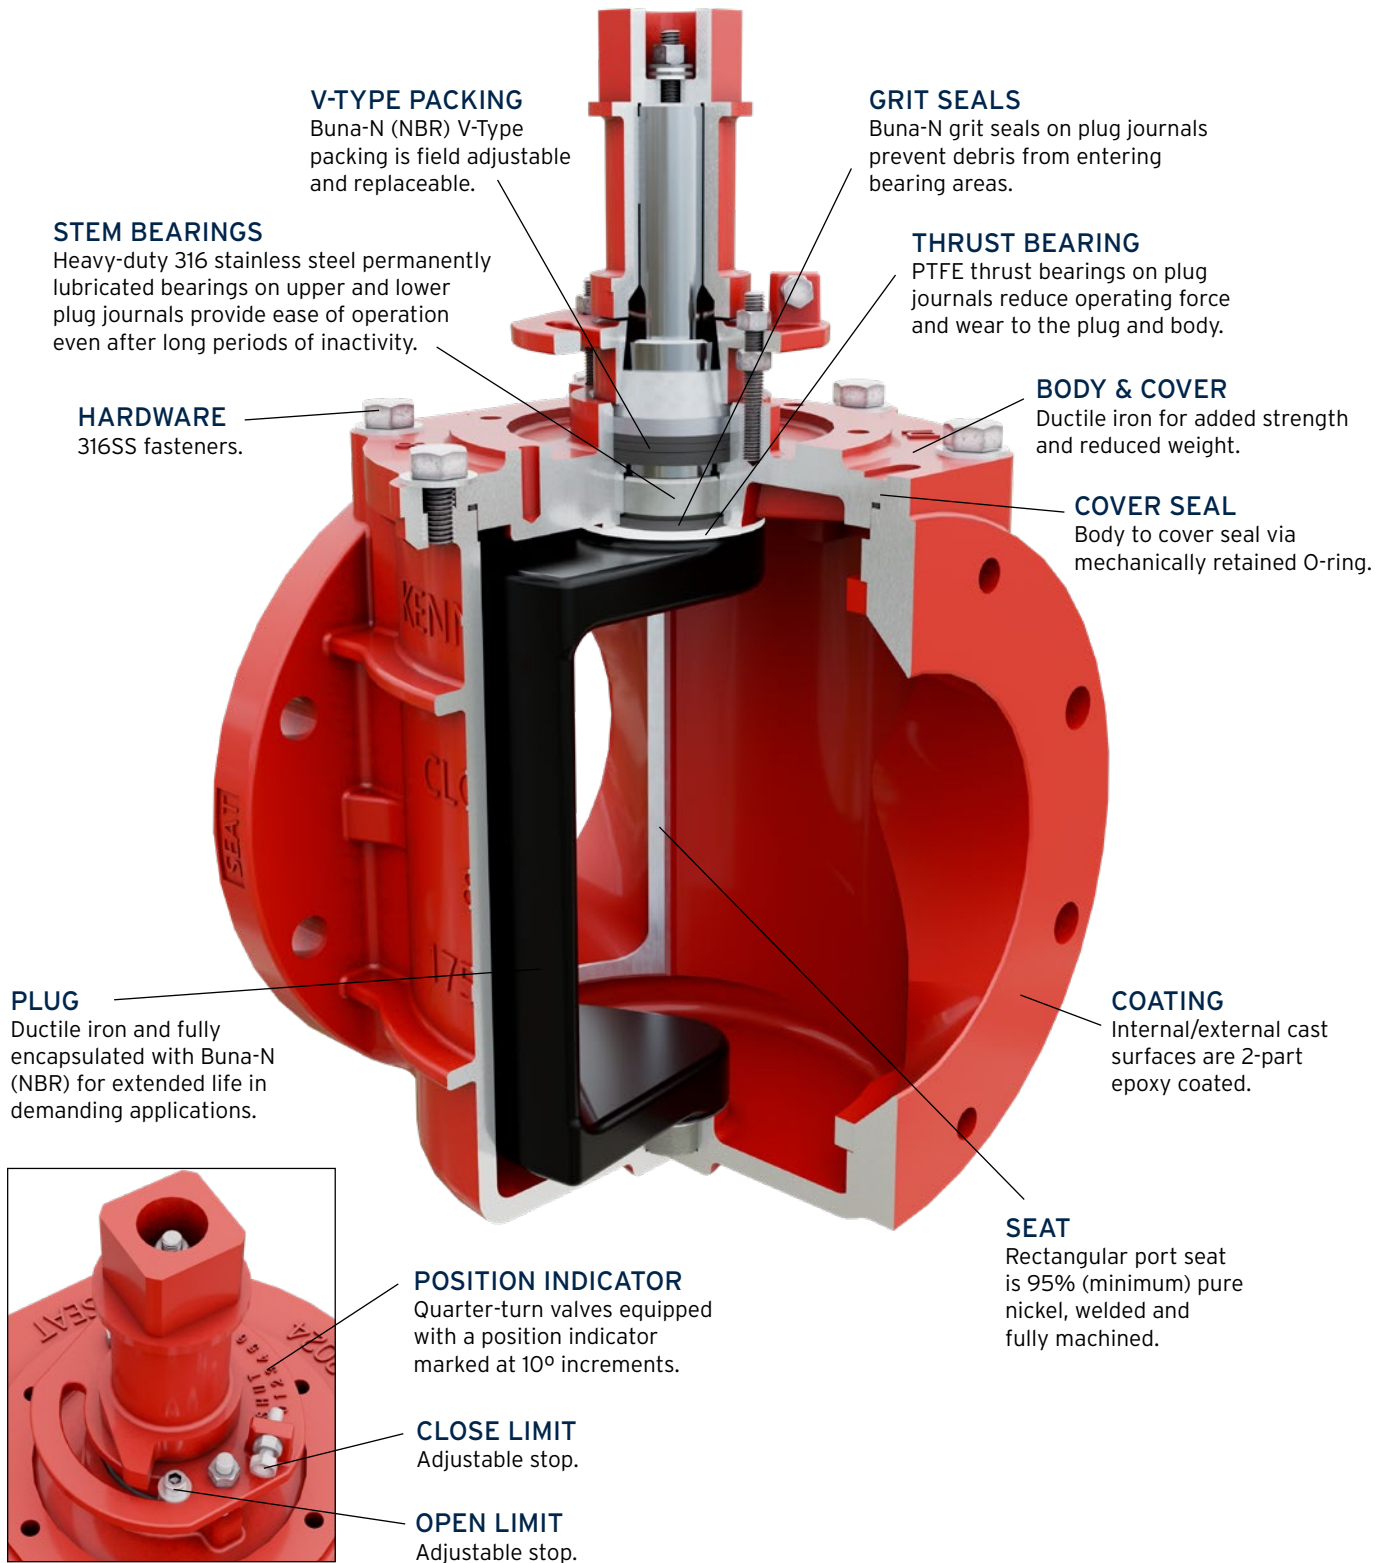

This document is provided for general informational purposes only and is not intended to define or represent the scope of supply, configuration, or origin of any product. Images, drawings, diagrams, photographs, and specifications may depict optional features or representative designs and are subject to change without notice. Nothing contained herein shall be deemed to create or extend any warranty, express or implied. All products are sold subject exclusively to McWane Plant & Industrial's standard Terms and Conditions of Sale.



MPI - MCWANE PLANT & INDUSTRIAL  
1201 Vanderbilt Road, Birmingham, AL 35234  
866.924.8674 • mcwanepi.com • sales@mcwanepi.com