


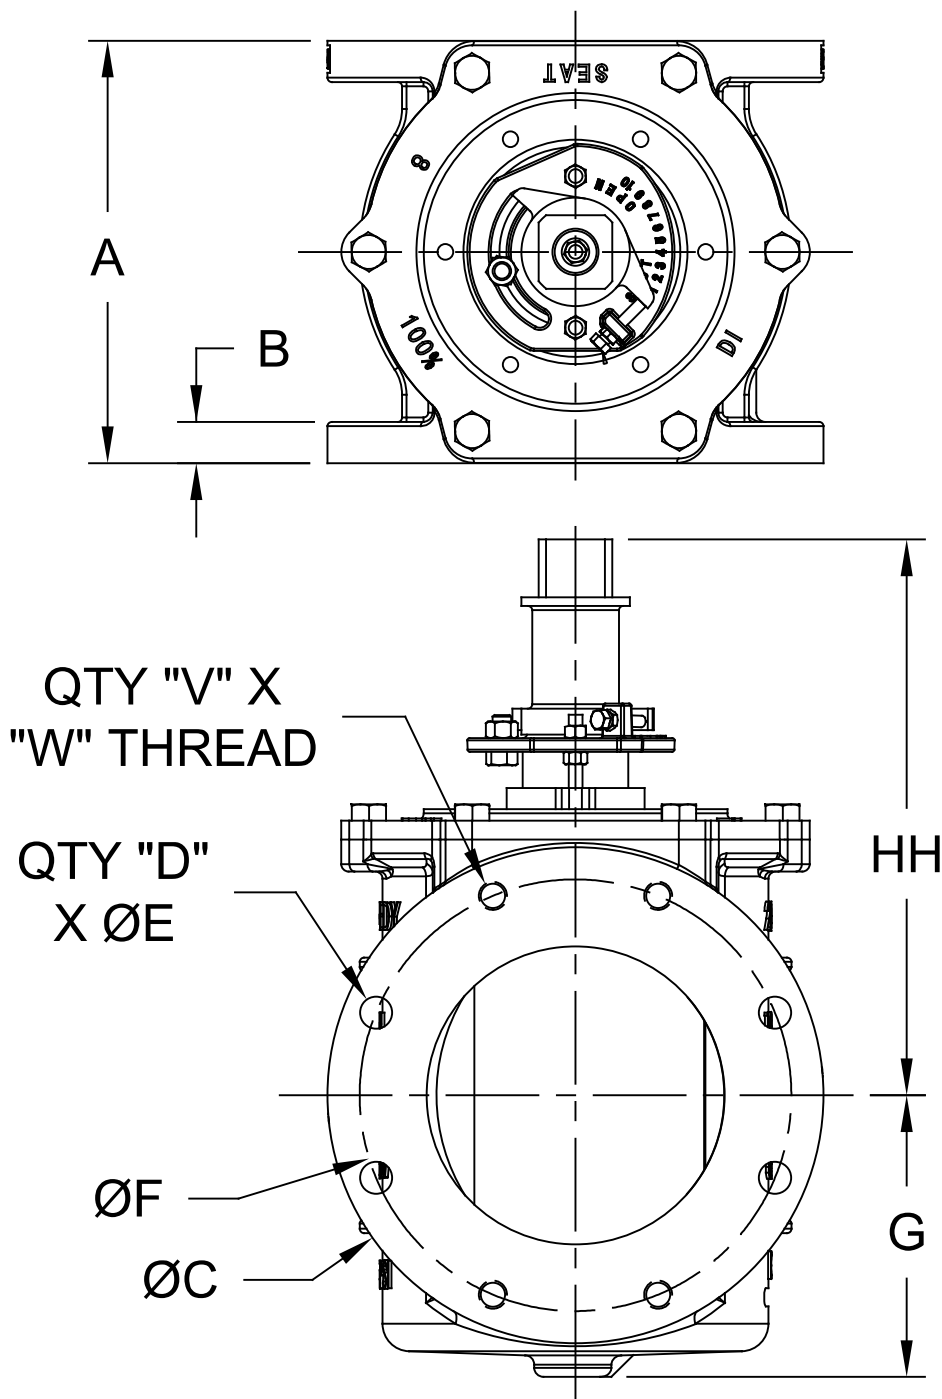

DIMENSIONS (Inches)

SIZE	A	B	C	D	E	F	G	V	W	HH	WT (lbs)
3	8.00	0.75	7.50	-	-	6.00	3.88	4	5/8"-11 $\downarrow$ 0.79	9.38	50
4	9.00	0.94	9.00	4	0.75	7.50	4.69	4	5/8"-11 $\downarrow$ 0.79	10.15	75
6	10.50	1.02	11.00	4	0.88	9.50	5.62	4	3/4"-10 $\downarrow$ 0.79	12.96	125
8	11.50	1.13	13.50	4	0.88	11.75	7.67	4	3/4"-10 $\downarrow$ 0.79	15.13	185

NOTE:

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE 175 PSI
3. HYDROSTATIC TEST PRESSURE 270 PSI
4. FOR SERVICES GREATER THAN 25 PSI, USE OF A GEAR IS RECOMMENDED

DESCRIPTION:

3"-8" AWWA C517 - 125# FLG Eccentric Plug Valve w/ Direct Nut Operator

DATE:

07/22/2026

DRAWING:

EP-DD0001-C

MPi MCWANE
PLANT & INDUSTRIAL

McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

