


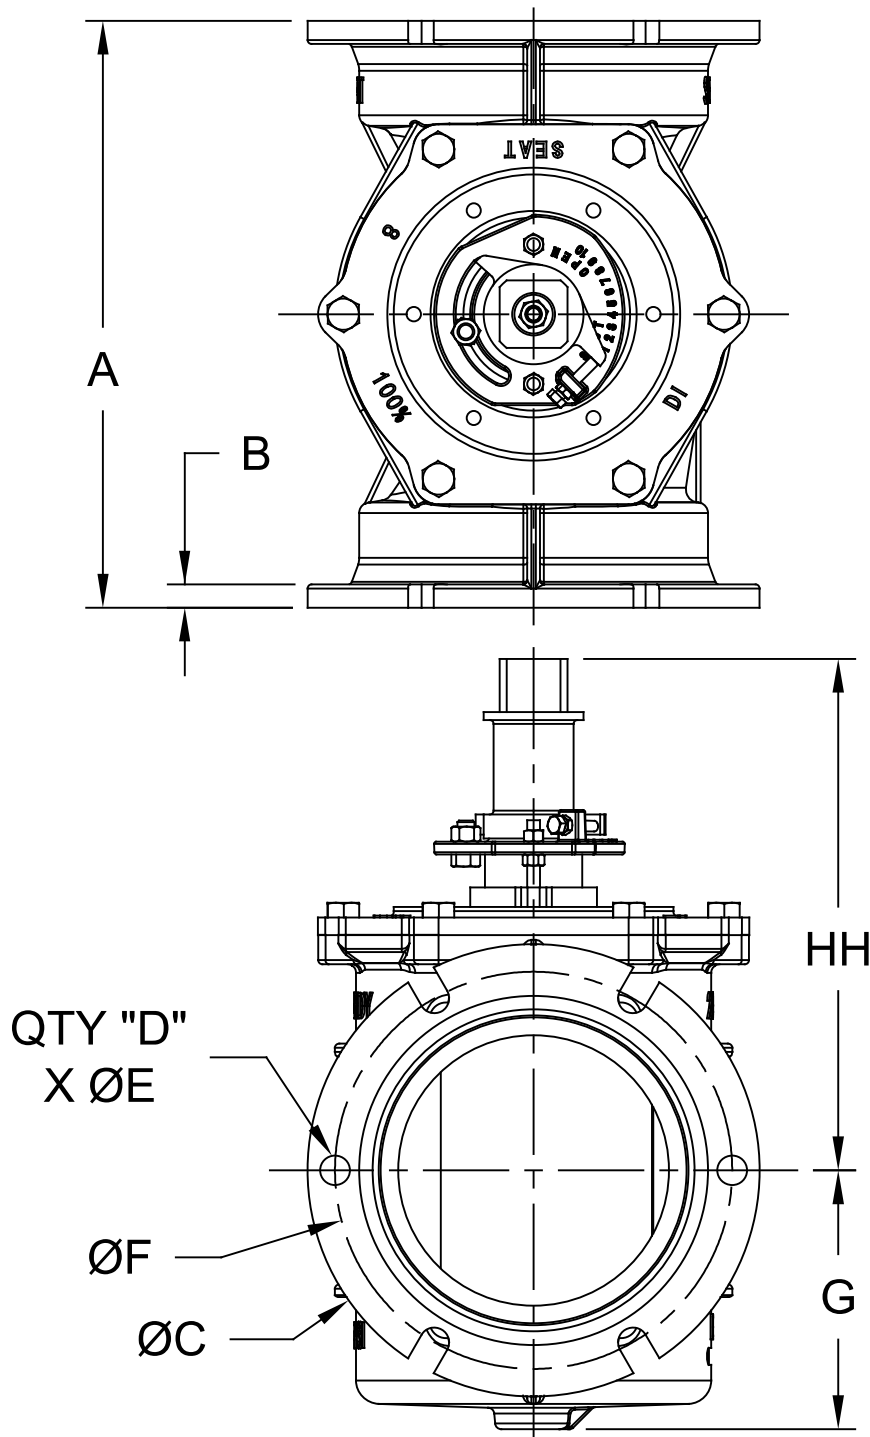

DIMENSIONS (Inches)									
SIZE	A	B	C	D	E	F	G	HH	WT (lbs)
3	11.50	0.58	7.62	4	0.75	6.19	3.88	9.38	70
4	14.25	0.60	9.06	4	0.88	7.50	4.69	10.15	100
6	15.75	0.63	11.06	6	0.88	9.50	5.62	12.96	145
8	17.36	0.66	13.40	6	0.88	11.75	7.67	15.13	200

NOTE:

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE 175 PSI
3. HYDROSTATIC TEST PRESSURE 270 PSI
4. FOR SERVICES GREATER THAN 25 PSI, USE OF A GEAR IS RECOMMENDED

DESCRIPTION:

3"-8" AWWA C517 - MJ Eccentric Plug Valve w/
Direct Nut Operator

DATE:

07/22/2026

DRAWING:

EP-DD0002-C

MPi MCWANE
PLANT & INDUSTRIAL

McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

