


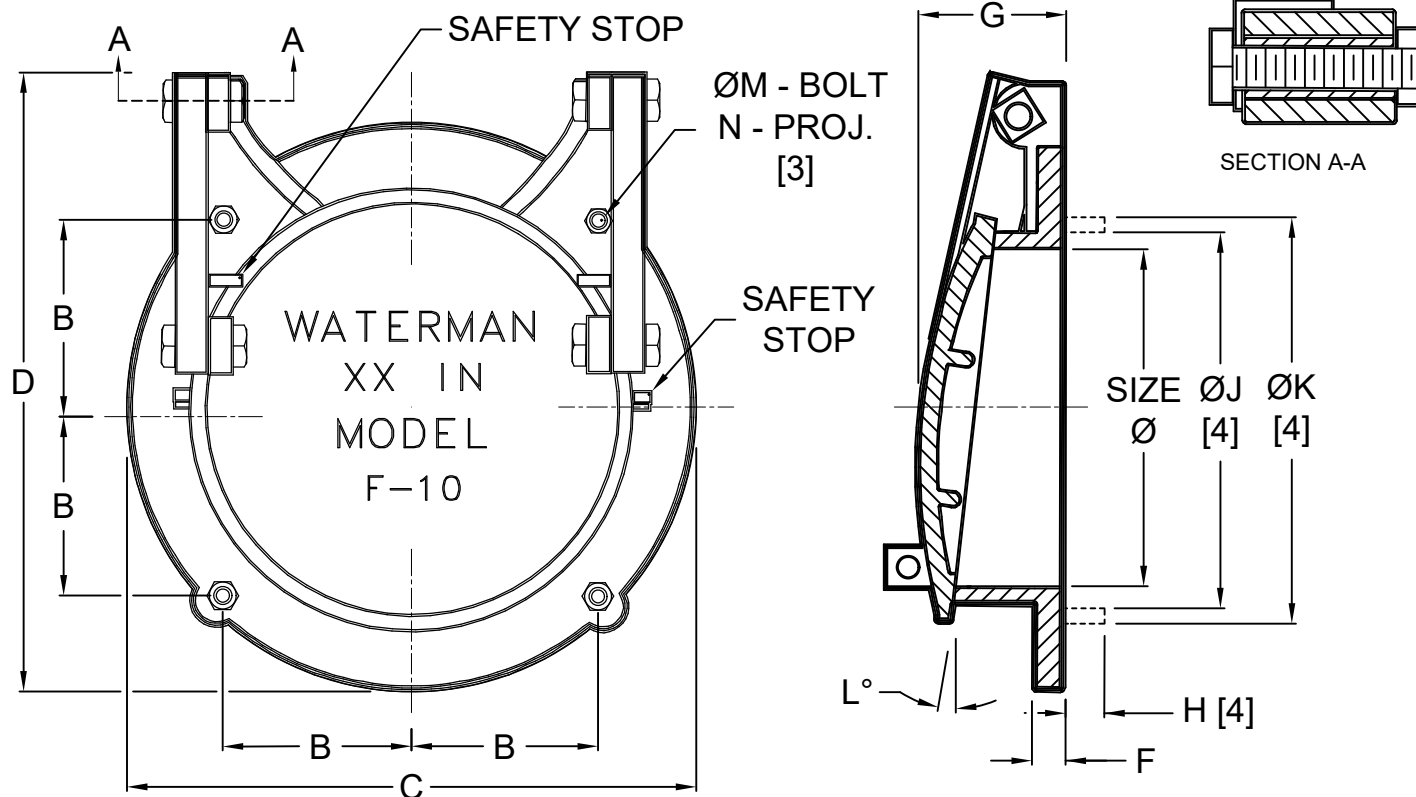

DIMENSIONS (Inches)

SIZE	B	C	D	F	G	H	J	K	L	M	N
4	2.25	6.31	8.50	0.38	4.13	2.25	5.13	5.63	5.0	1/2	1.38
6	2.81	8.06	10.00	0.38	4.13	2.25	7.13	7.56	5.0	1/2	1.38
8	3.50	10.00	12.00	0.38	4.25	2.19	9.13	9.63	5.0	1/2	1.38
10	4.75	12.25	14.50	0.38	4.50	2.25	11.19	11.63	5.0	1/2	1.38
12	5.13	15.00	17.13	0.38	4.50	2.13	13.13	13.63	5.0	1/2	1.38
14	5.94	16.88	19.63	0.38	4.75	2.13	15.06	15.63	5.0	1/2	1.38
15	6.25	18.13	20.00	0.38	5.00	2.25	16.00	16.75	5.0	1/2	1.38
16	6.63	18.69	21.63	0.44	5.00	2.38	17.00	17.75	5.0	1/2	1.38
18	7.44	21.00	24.38	0.44	5.38	2.13	19.00	19.75	5.0	1/2	1.38
20	8.25	23.56	26.50	0.50	6.00	2.25	21.13	21.75	5.0	5/8	1.63
21	8.63	24.13	27.50	0.50	7.00	2.25	22.00	22.75	5.0	5/8	1.63
24	9.69	27.50	32.00	0.50	7.63	2.25	25.00	16.50	5.0	5/8	1.63
30	12.00	34.00	39.63	0.75	6.50	2.19	31.00	32.00	2.5	3/4	2.00
36	14.38	40.63	46.00	0.75	8.00	2.13	37.00	38.00	2.5	3/4	2.00
42	16.69	47.63	55.75	0.75	8.00	2.50	43.13	44.13	2.5	3/4	2.00
48	19.31	54.50	63.38	0.75	9.13	3.00	49.13	50.50	2.5	3/4	2.00
54	22.13	60.25	71.00	0.88	9.75	3.00	55.25	57.00	2.5	1	2.75
60	24.81	72.00	80.63	1.00	10.75	3.00	61.25	62.75	2.5	1	2.75

NOTES :

- Maximum 10 ft. Seating head.
- Not recommended for pump discharge use.
- Add grout pad thickness to anchor bolt projection.
- Applies to Spigotback gate only.

DESCRIPTION:

F-10 Cast Iron Flap Gate

DATE:

07/29/2026

DRAWING:

FG-DD0001-A



McWane Plant & Industrial
25500 Road 204
Exeter, CA 93221

