


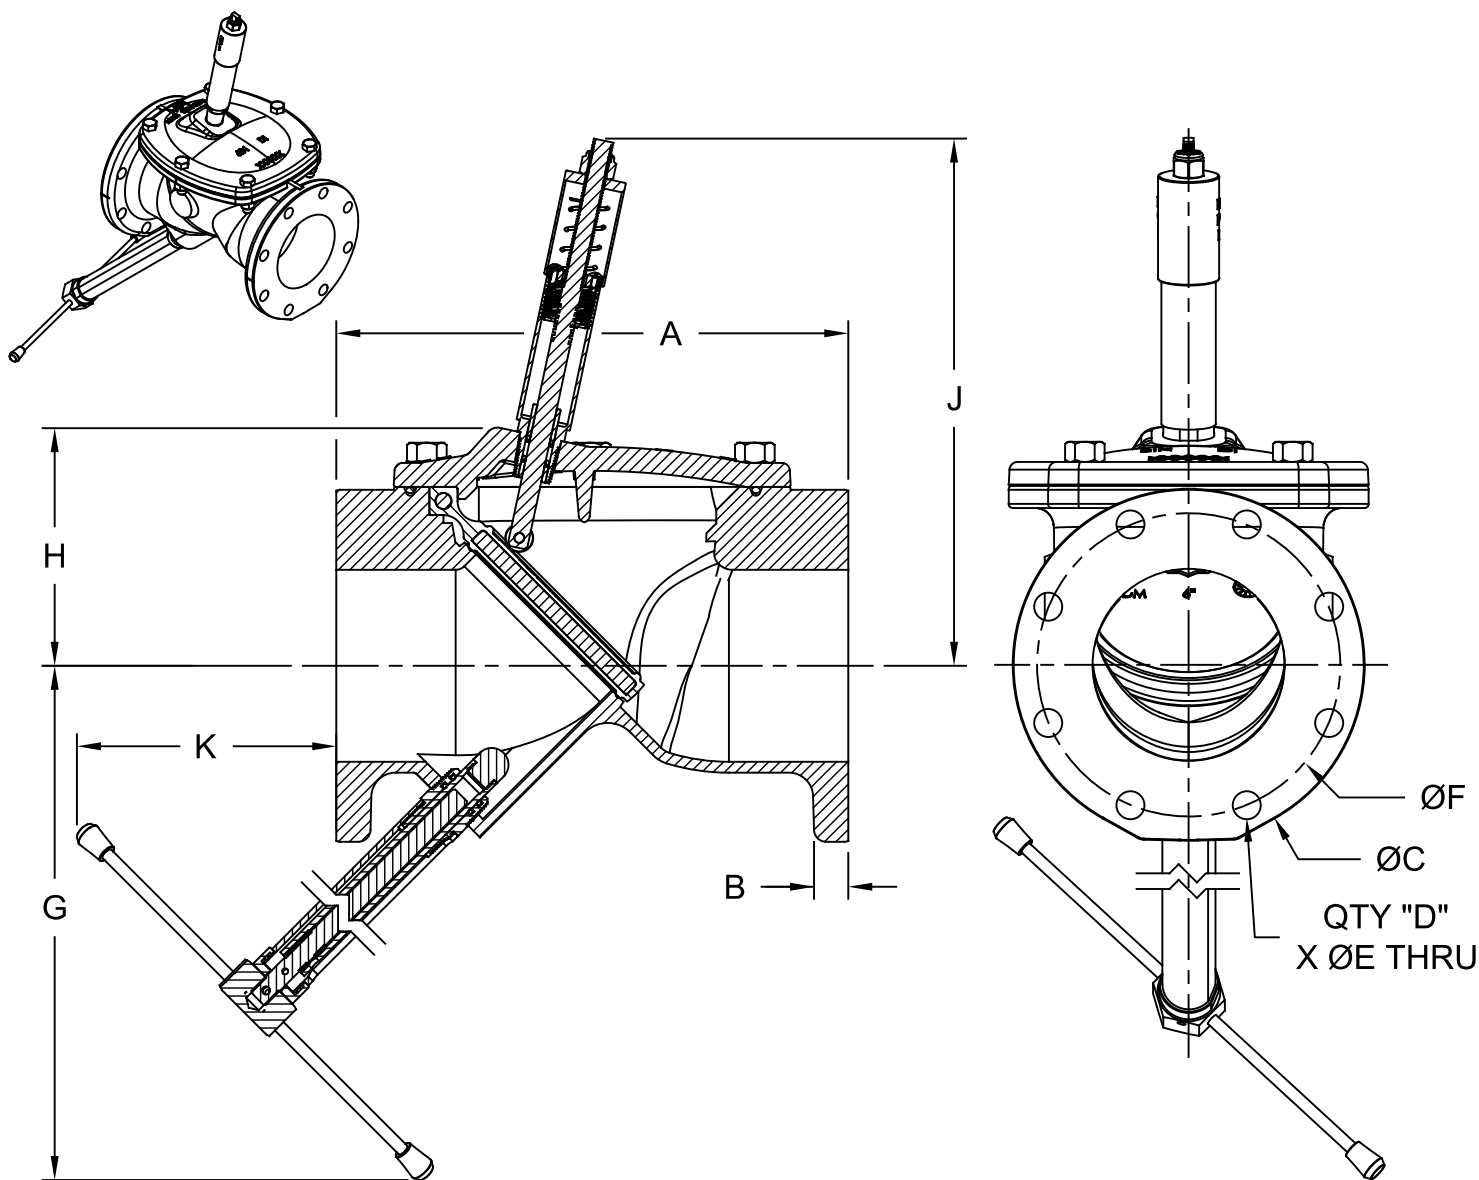

DIMENSIONS (Inches)											
SIZE	A	B	C	D	E	F	G	H	J	K	WT (lbs)
3	13.00	1.00	9.00	4	SEE NOTE	6.00	14.22	6.78	12.21	7.79	78
4	13.00	1.00	9.00	8	0.75	7.50	14.22	6.78	12.21	7.79	78
6	16.00	1.06	11.00	8	0.88	9.50	21.12	9.29	14.28	13.17	131
8	19.50	1.19	13.50	8	0.88	11.75	22.05	10.84	15.60	12.56	198
10	24.50	1.25	16.00	12	1.00	14.25	26.62	13.23	17.04	15.81	317
12	27.50	1.28	19.00	12	1.00	17.00	27.63	15.29	18.45	15.81	413
14	31.00	1.00	21.00	12	1.13	18.75	36.80	18.00	25.20	22.30	680
16	32.00	1.13	23.50	16	1.13	21.25	38.30	18.93	25.60	21.70	812
18	36.00	1.38	25.00	16	1.25	22.75	38.90	22.03	27.70	19.40	1,125
20	40.00	1.38	27.50	20	1.25	25.00	40.70	23.28	28.90	15.20	1,434
24	48.00	1.50	32.00	20	1.38	29.50	43.10	27.63	31.60	10.00	2,129
30	56.00	2.12	38.75	28	1.38	36.00	52.70	34.90	42.30	5.70	3,937
36	63.00	2.38	46.00	32	1.63	42.75	55.30	38.43	46.00	3.80	5,801

NOTE:

1. 3" VALVE FLANGES DRILLED & TAPPED TO 5/8"-11 UNC-2B
2. COLD WORKING PRESSURE - 250PSI
3. HYDROSTATIC TEST PRESSURE - 500PSI

DESCRIPTION:

3"-36" 125# Flanged KEN-FLEX™ Check Valve w/ Backflow Actuator & Position Indicator

DATE:

02/27/2026

DRAWING:

KF-DD0004-A

MPI MCWANE
PLANT & INDUSTRIAL

McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

