


No.	PART	MATERIAL
1	Body	Ductile Iron, ASTM A536 - GR 65-45-12 with Welded Nickel Seat
2	Cover	Ductile Iron, ASTM A536 - GR 65-45-12
3	Plug	Ductile Iron, ASTM A536 - GR 65-45-12 with NBR (Buna-N) Plug Facing
4	Follower Gland	Ductile Iron, ASTM A536 - GR 65-45-12
5	Grit Seal	NBR (Buna-N)
6	V-Packing	NBR (Buna-N)
7	Sleeve Bearing	Sintered Stainless Steel, T316
8	Thrust Bearing	PTFE
9	Cover Seal	NBR (Buna-N)
10	Cover Hardware	Stainless Steel, T316 - ASTM A276
11	Stud	Stainless Steel, T316 - ASTM A276
12	Hex Nut	Stainless Steel, T316 - ASTM A276
18	2" Operating Nut	Ductile Iron, ASTM A536 - GR 65-45-12
19	Stem Stud	Stainless Steel, T316 - ASTM A276
20	Lock Nut	Stainless Steel, T316 - ASTM A276
21	Spring Washer	Stainless Steel, T316 - ASTM A276
22	Brake	40% Glass-Filled PPS
23	Closed Stop Bolt	Stainless Steel, T316 - ASTM A276
24	Open Stop Bolt	Stainless Steel, T316 - ASTM A276
25	Jam Nut	Stainless Steel, T316 - ASTM A276
26	Washer	Stainless Steel, T316 - ASTM A276

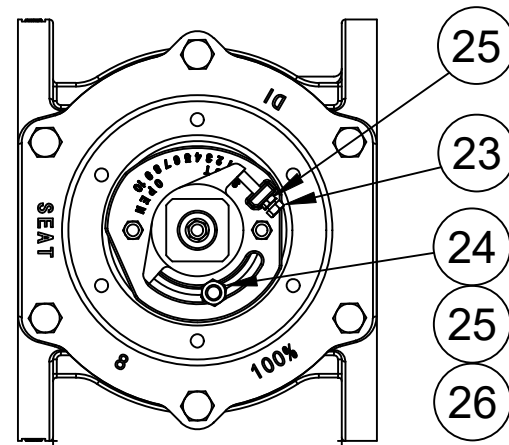

**DESCRIPTION:**

3"-8" AWWA C517 Direct Nut Operated Eccentric Plug Valve Materials of Construction

**DATE:**

08/01/24

**DRAWING:**

EP-MC0001-A



McWane Plant & Industrial  
1201 Vanderbilt Road  
Birmingham, AL 35234

**CLOW**  
VALVE CO.

