


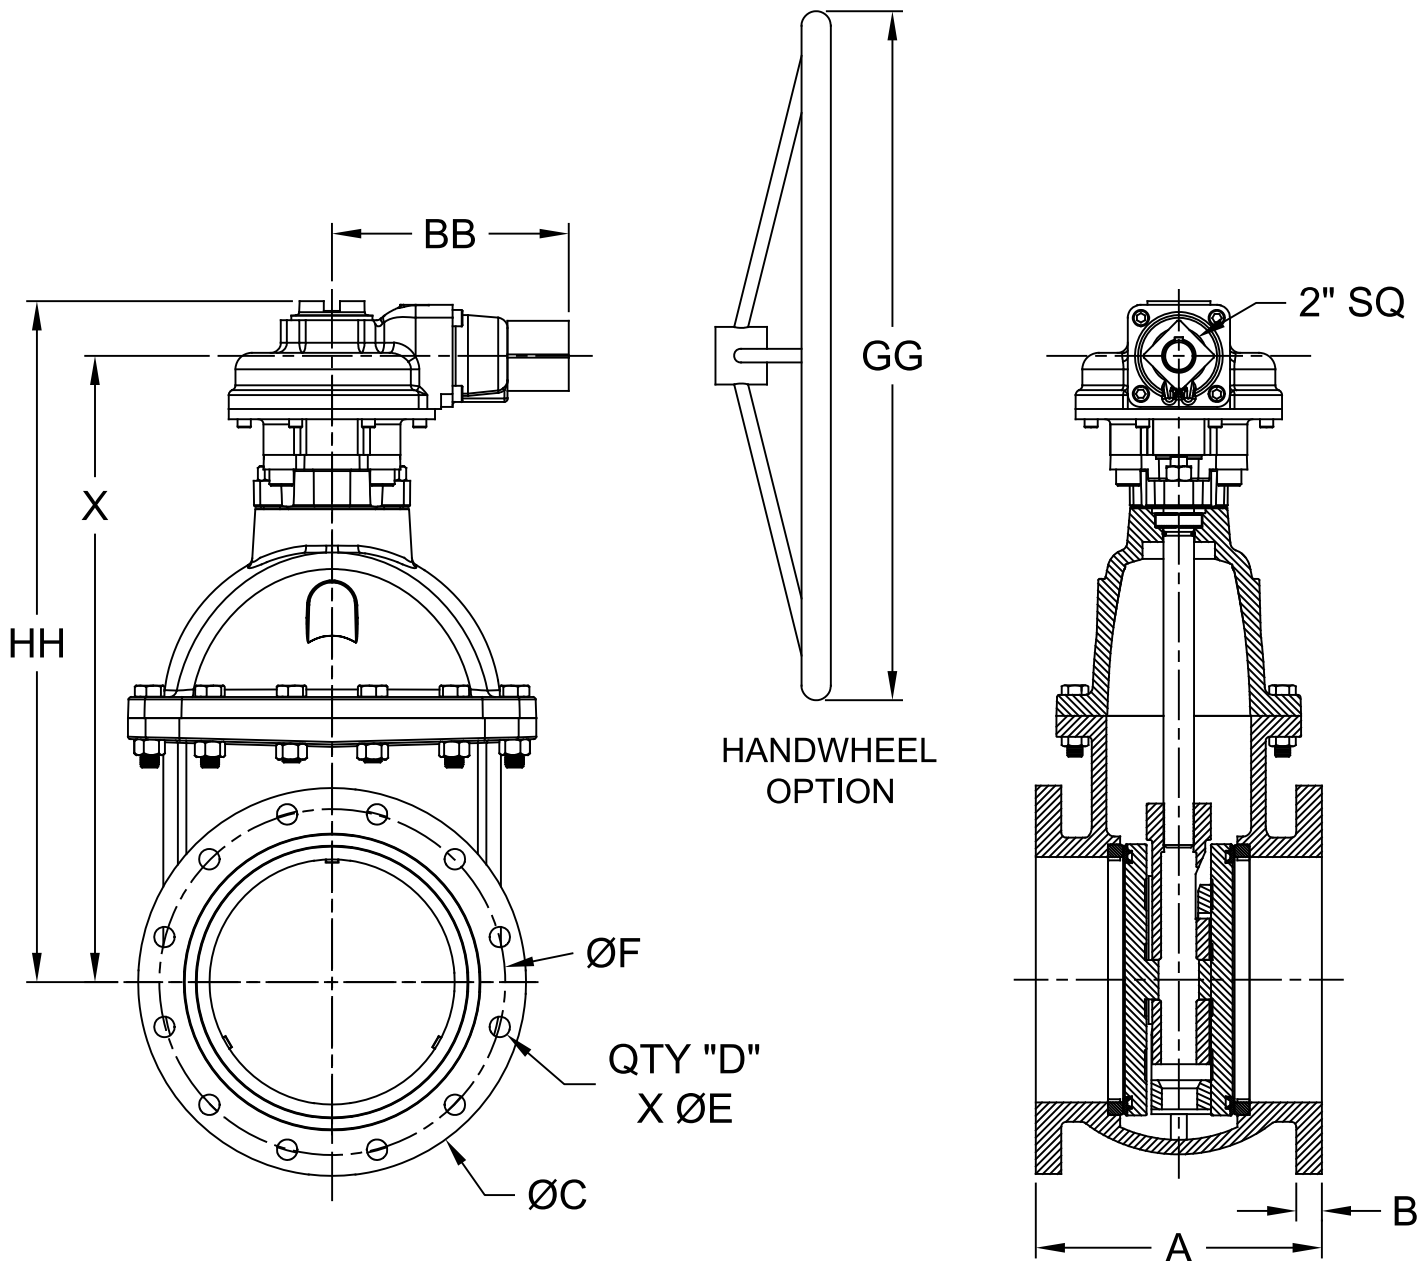

DIMENSIONS (Inches)

SIZE	A	B	C	D	E	F	X	BB	GG	HH	WT (lbs)	ACT. MODEL	TURNS TO OPEN
3	8.00	0.75	7.50	4	0.75	6.00	14.36	9.13	12.00	16.33	119	IB5 2:1	20
4	9.00	0.94	9.00	8	0.75	7.50	15.92	9.13	12.00	17.90	158	IB5 2:1	28
6	10.50	1.00	11.00	8	0.88	9.50	19.17	9.13	16.00	21.14	311	IB5 2:1	40
8	11.50	1.13	13.50	8	0.88	11.75	22.35	9.13	20.00	24.32	348	IB5 2:1	52
10	13.00	1.19	16.00	12	1.00	14.25	26.06	9.13	24.00	28.03	497	IB5 2:1	62
12	14.00	1.25	19.00	12	1.00	17.00	29.25	9.13	24.00	31.22	702	IB5 2:1	76

NOTE:

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE - 250PSI
3. HYDROSTATIC TEST PRESSURE - 500PSI

DESCRIPTION:

3"-12" AWWA C500 - 125# FLG x FLG
Rotating Disc Gate Valve (NRS) w/Bevel Gear

DATE:

06/16/2026

DRAWING:

RD-DD0019-A

MPI MCWANE
PLANT & INDUSTRIAL

McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

