


HANDWHEEL OPTION

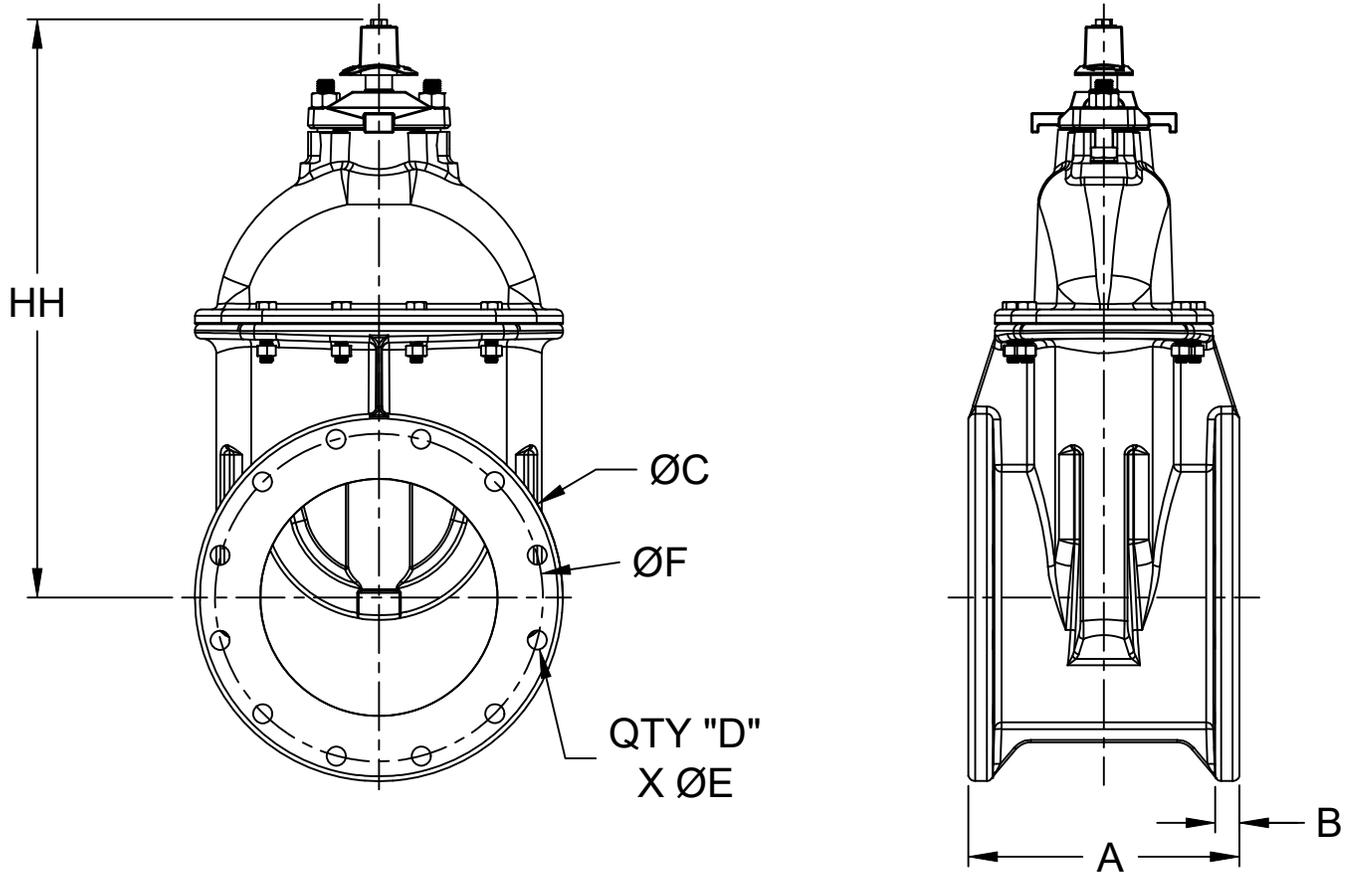

DIMENSIONS (Inches)										
SIZE	A	B	C	D	E	F	GG	HH	WT (lbs)	TURNS TO OPEN
3	8.00	0.75	7.50	4	0.75	6.00	10.00	12.38	79	10
4	9.00	0.94	9.00	8	0.75	7.50	10.00	14.75	101	13
6	10.50	1.00	11.00	8	0.88	9.50	12.00	19.00	139	19
8	11.50	1.13	13.50	8	0.88	11.75	14.00	22.50	208	25
10	13.00	1.19	16.00	12	1.00	14.25	18.00	26.50	339	31
12	14.00	1.25	19.00	12	1.00	17.00	18.00	30.00	406	37
14	15.00	1.38	21.00	12	1.13	18.75	26.00	38.40	675	52
16	16.00	1.44	23.50	16	1.13	21.25	26.00	37.33	720	52

- NOTE:
1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
  2. COLD WORKING PRESSURE - 250PSI
  3. HYDROSTATIC TEST PRESSURE - 500PSI

DESCRIPTION:  
3"-16" AWWA C515 - 125# FLG x FLG  
Resilient Wedge Gate Valve (NRS)

DATE:  
02/28/2026

DRAWING:  
RW-DD0001-A



McWane Plant & Industrial  
1201 Vanderbilt Road  
Birmingham, AL 35234

