
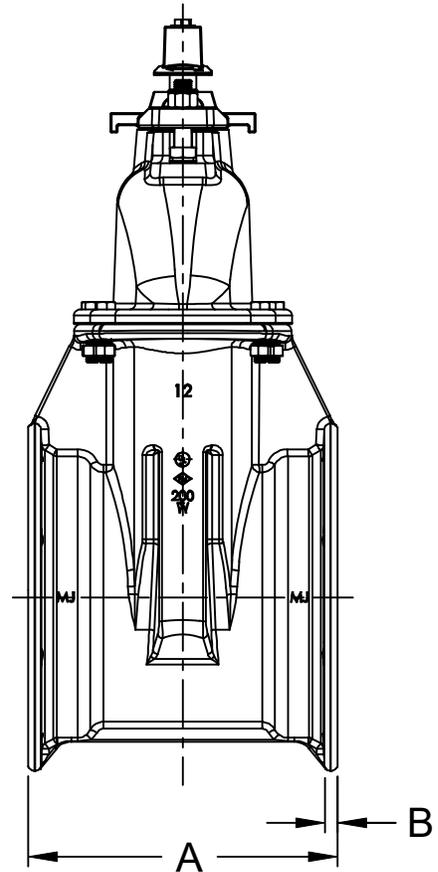


HANDWHEEL OPTION

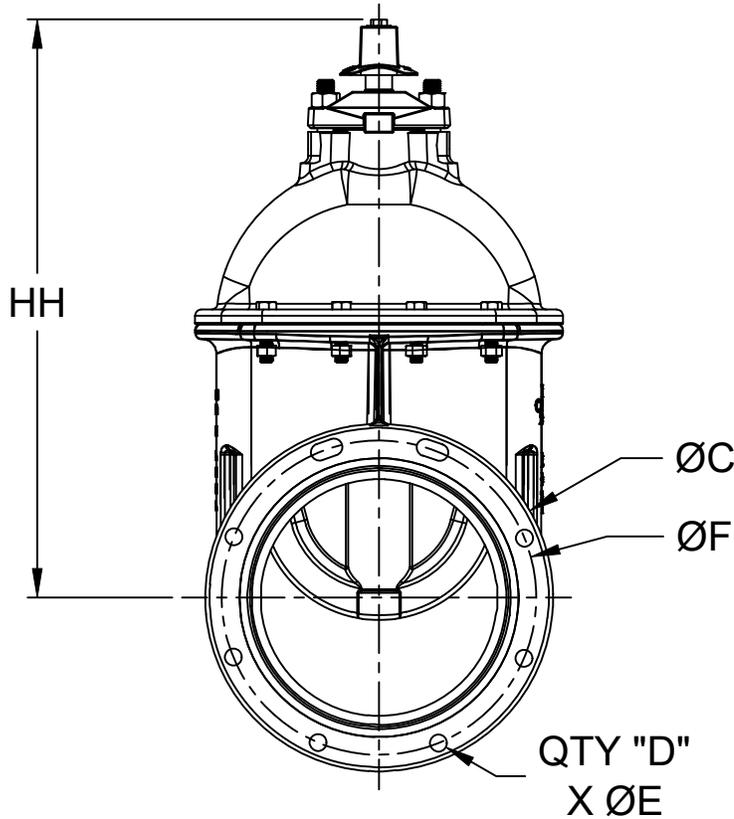

DIMENSIONS (Inches)										
SIZE	A	B	C	D	E	F	GG	HH	WT (lbs)	TURNS TO OPEN
3	8.50	0.88	7.75	4	0.75	6.19	10.00	12.38	58	10
4	9.50	0.55	9.13	4	0.88	7.50	10.00	14.75	70	13
6	10.50	0.57	11.38	6	0.88	9.50	12.00	19.00	110	19
8	13.12	0.62	13.75	6	0.88	11.75	14.00	22.50	164	25
10	15.50	0.65	15.75	8	0.88	14.00	18.00	26.50	287	31
12	16.00	0.65	18.00	8	0.88	16.25	18.00	30.00	362	37
14	17.00	0.91	20.25	10	0.88	18.75	26.00	38.40	650	52
16	17.00	0.84	22.50	12	0.88	21.00	26.00	37.33	720	52

- NOTE:
1. FLANGES CONFORM TO ANSI 21.11/AWWA C111
 2. COLD WORKING PRESSURE - 250PSI
 3. HYDROSTATIC TEST PRESSURE - 500PSI

DESCRIPTION:
2"-16" AWWA C515 - MJ x MJ Resilient Wedge Gate Valve (NRS)

DATE:
02/26/2026

DRAWING:
RW-DD0002-A



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

