


HANDWHEEL OPTION

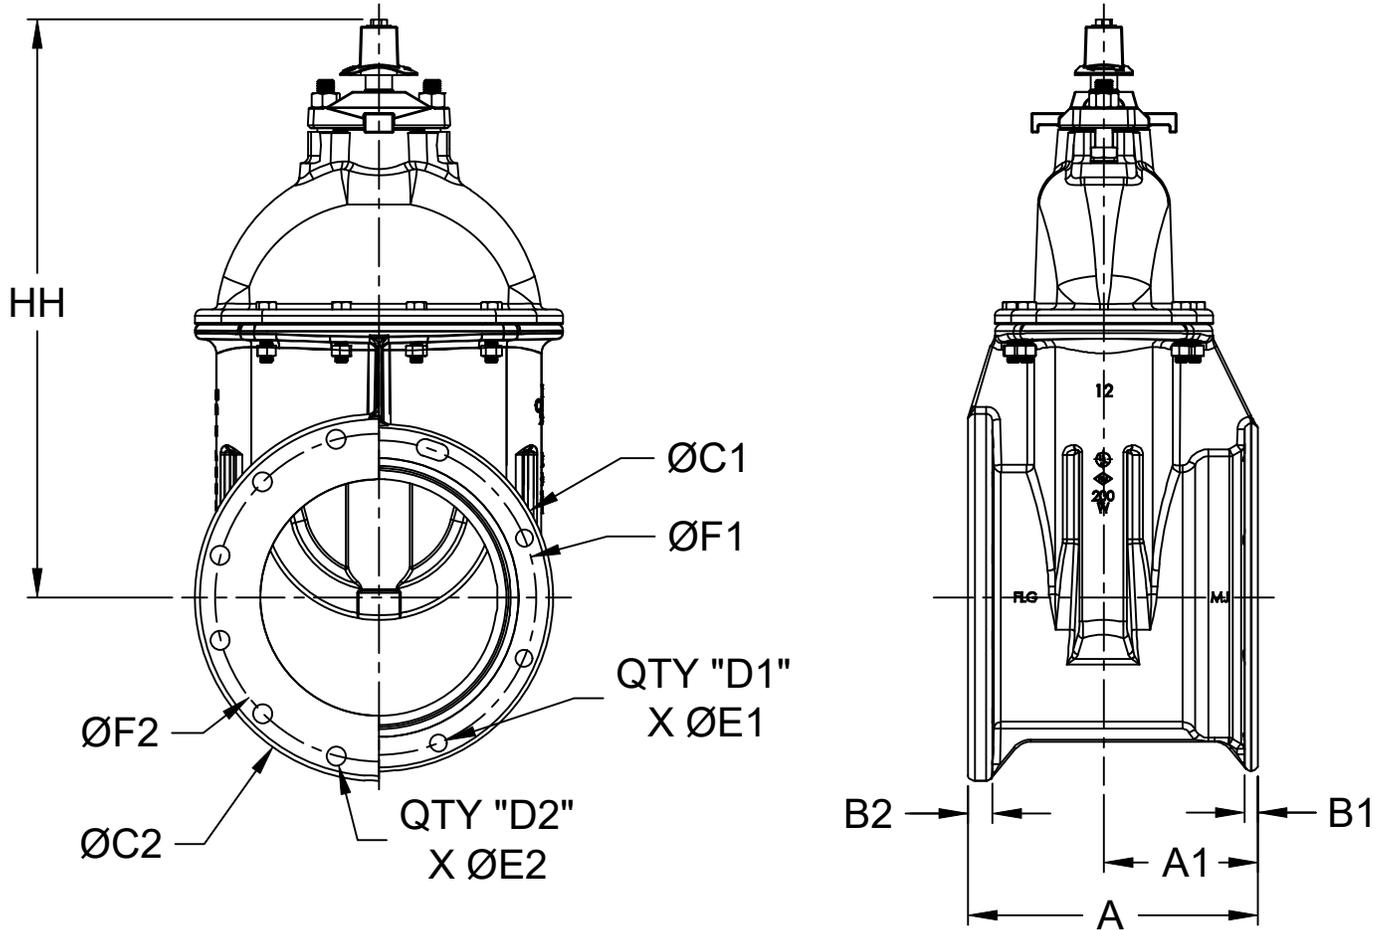

DIMENSIONS (Inches)																
SIZE	A	A1	B1	B2	C1	C2	D1	E1	D2	E2	F1	F2	GG	HH	WT (lbs)	TURNS TO OPEN
3	8.25	4.25	0.88	0.75	7.75	7.50	4	0.75	4	0.75	6.19	6.00	10.00	12.38	60	10
4	9.25	4.75	0.55	0.94	9.13	9.00	4	0.88	8	0.75	7.50	7.50	10.00	14.75	79	13
6	10.50	5.25	0.57	1.00	11.38	11.00	6	0.88	8	0.88	9.50	9.50	12.00	19.00	134	19
8	12.31	5.75	0.62	1.13	13.75	13.50	6	0.88	8	0.88	11.75	11.75	14.00	22.50	213	25
10	14.25	7.75	0.65	1.19	15.75	16.00	8	0.88	12	1.00	14.00	14.25	18.00	26.50	365	31
12	15.00	8.00	0.65	1.25	18.00	19.00	8	0.88	12	1.00	16.25	17.00	18.00	30.00	497	37
14	17.00	8.50	0.91	1.38	20.25	21.00	10	0.88	12	1.13	18.75	18.75	26.00	38.40	650	52
16	16.56	8.56	0.84	1.44	22.50	23.50	12	0.88	16	1.13	21.00	21.25	26.00	37.33	720	52

**NOTE:**

1. FLG END CONFORMS TO ANSI B16.1 CLASS 125
2. MJ END CONFORMS TO ANSI 21.11/AWWA C111
3. COLD WORKING PRESSURE - 250PSI
4. HYDROSTATIC TEST PRESSURE - 500PSI

**DESCRIPTION:**

3"-16" AWWA C515 - 125# FLG x MJ Resilient Wedge Gate Valve (NRS)

**DATE:**

02/26/2026

**DRAWING:**

RW-DD0003-A



McWane Plant & Industrial  
1201 Vanderbilt Road  
Birmingham, AL 35234

