


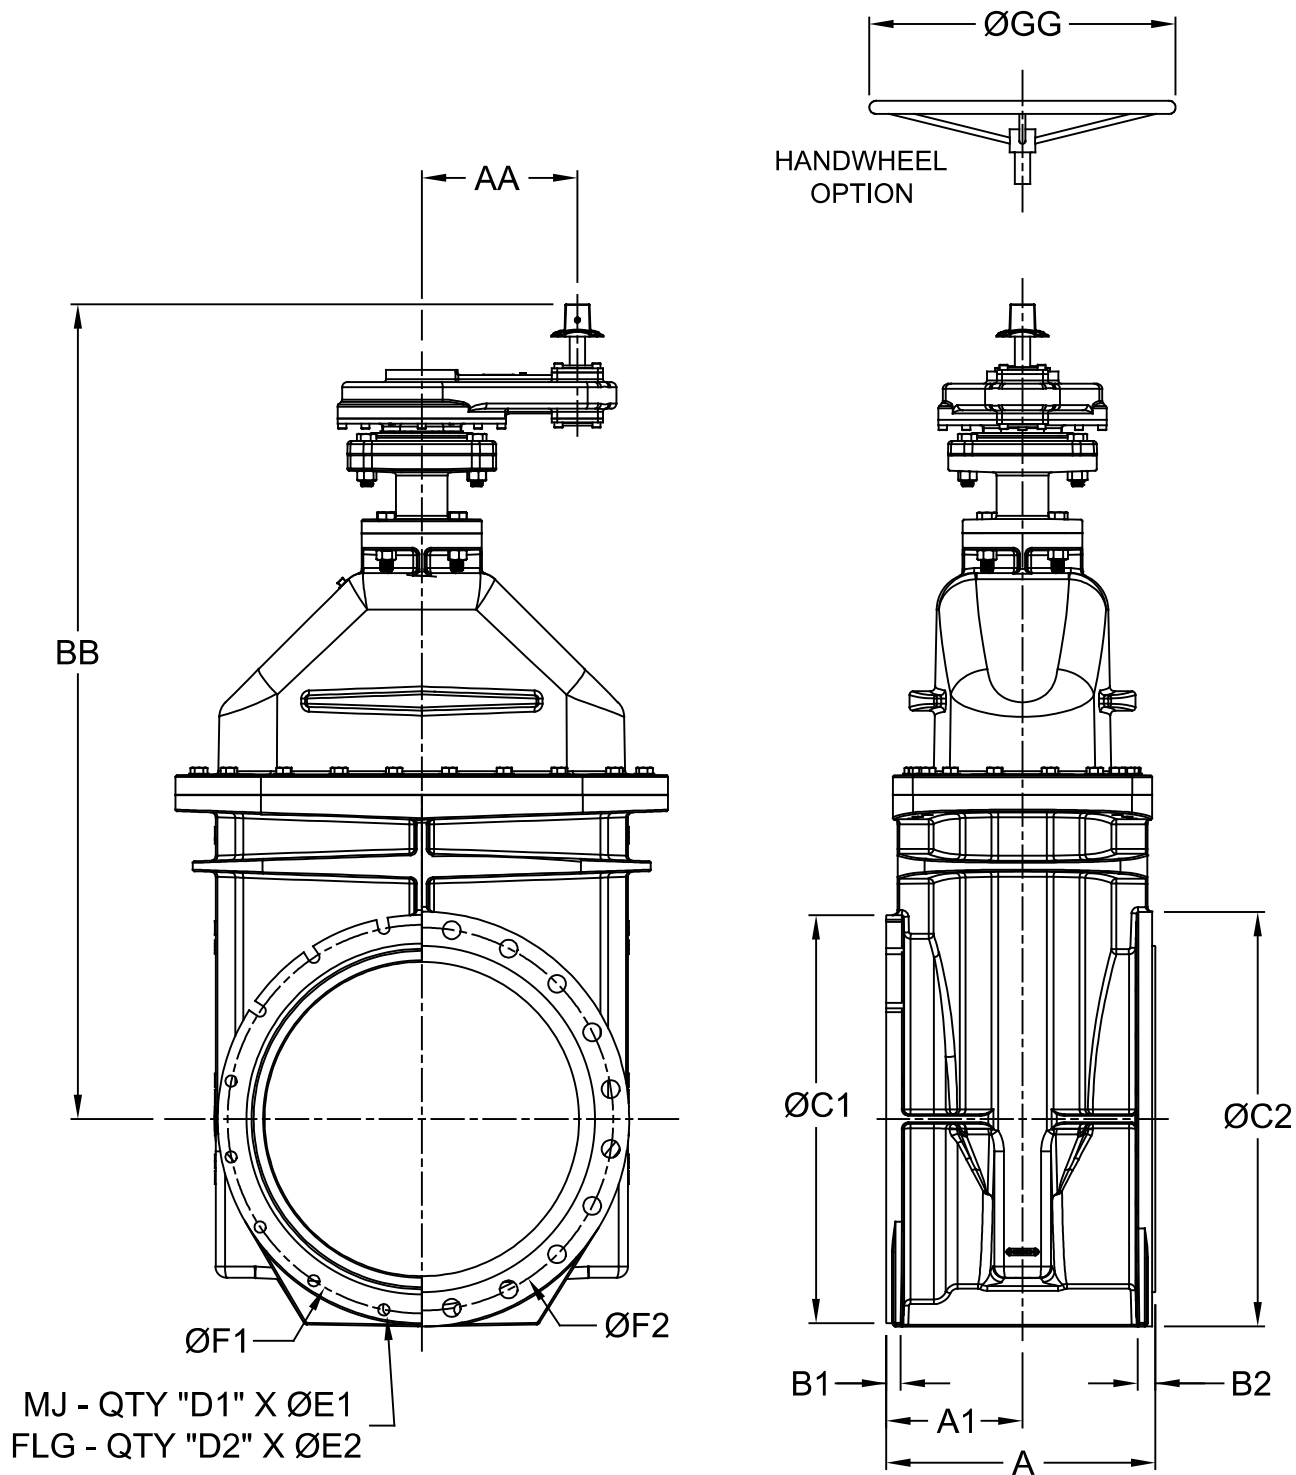

DIMENSIONS (Inches)

SIZE	A	A1	B1	B2	C1	C2	D1	E1	D2	E2	F1	F2	AA	BB	GG	WT (lbs)	ACT. MODEL	TURNS TO OPEN
14	17.00	8.50	0.91	1.38	20.25	21.00	10	0.88	12	1.13	18.75	18.75	8.00	52.87	24.00	1,000	IS5 2:1	104
16	16.56	8.56	0.84	1.44	22.50	23.50	12	0.88	16	1.13	21.00	21.25	8.00	51.45	24.00	1,150	IS5 2:1	104
18	18.38	9.38	1.20	1.53	24.75	25.00	12	0.88	16	1.25	23.25	22.75	12.00	58.67	24.00	1,325	IS7 3:1	192
20	18.00	9.00	1.20	1.65	27.00	27.50	14	0.88	20	1.25	25.50	25.00	12.00	58.86	24.00	2,050	IS7 3:1	192
24	20.50	10.25	1.23	1.88	31.50	32.00	16	0.88	20	1.38	30.00	29.50	12.00	62.86	24.00	2,750	IS7 3:1	228

NOTE:

1. MJ ENDS CONFORM TO ANSI 21.11/AWWA C111
2. TAP END CONFORMS TO MSS SP-60
3. COLD WORKING PRESSURE - 250PSI
4. HYDROSTATIC TEST PRESSURE - 500PSI

DESCRIPTION:

14"-24" AWWA C515 - MJ x TAP Resilient Wedge Gate Valve with Spur Gear (NRS)

DATE:

07/28/2026

DRAWING:

RW-DD0022-A

MPI MCWANE
PLANT & INDUSTRIAL

McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

