


No.	PART	STANDARD MATERIAL	OPTIONAL MATERIAL
1	Body	Ductile Iron, ASTM A536	-
2	Bonnet	Ductile Iron, ASTM A536	-
3	Wedge	EPDM Encapsulated Ductile Iron, ASTM A536	-
4	Stem Nut	Silicon Bronze, C87850	C87610
5	Stem	Bronze, C46400	C86700 / Stainless Steel, T304 or T316
6	Stem O-ring	EPDM	NBR
7	Bonnet O-ring	EPDM	NBR
8	Bonnet Hardware	Stainless Steel, 18-8	Stainless Steel, T316
10	Handwheel	Ductile Iron, ASTM A536	-
12	Stem Bushing (16")	Silicon Bronze, C87850	-
13	Pipe Plug	Stainless Steel, T304	Stainless Steel, T316
28	Yoke	Ductile Iron, ASTM A536	-
29	Yoke O-ring	EPDM	NBR
30	Yoke Nut (14")	Brass, C26000	-
	Yoke Nut (16")	Manganese Bronze, C86700	C99400
32	Yoke Hardware	Stainless Steel, 18-8	Stainless Steel, T316
33	Yoke Nut Retainer	Ductile Iron, ASTM A536	-
34	Wheel Nut	Silicon Bronze, C87850	-
35	Pin	Stainless Steel, T302/T303/T304	-
36	Key	Stainless Steel, 18-8	Stainless Steel, T316
37	Spacer	Silicon Bronze, C87850	-
38	Yoke Bushing	Silicon Bronze, C87850	-
39	Stuffing Box	Ductile Iron, ASTM A536	-
40	Stuffing Box Hardware	Stainless Steel, 18-8	Stainless Steel, T316
41	Packing	Braided Flax	-
42	Gland	Silicon Bronze, C87850	C65500, C83600
43	Gland Follower	Ductile Iron, ASTM A536	-
44	Gland Hardware	Stainless Steel, 18-8	Stainless Steel, T316

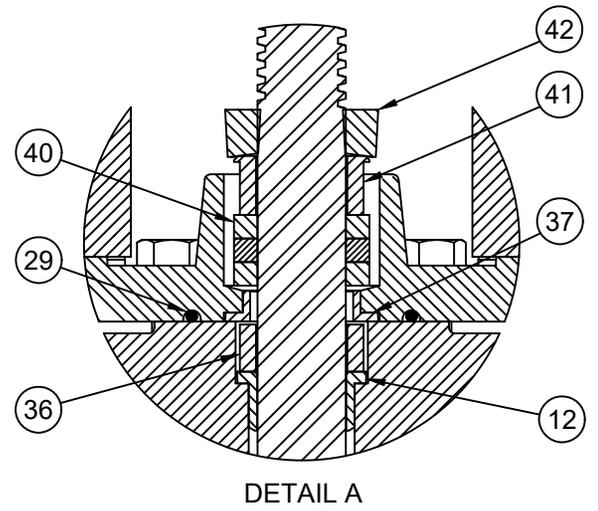

DESCRIPTION: 14"-16" Resilient Seated Gate Valve - No Gear Materials of Construction (OS&Y)	DATE: 03/06/2026	DRAWING: RW-MC0003-A	

Products and images depicted are for general illustrative purposes only and do not represent the complete scope of supply, configuration, or country of origin. Final product details are governed solely by McWane Plant & Industrial's standard Terms and Conditions of Sale.