
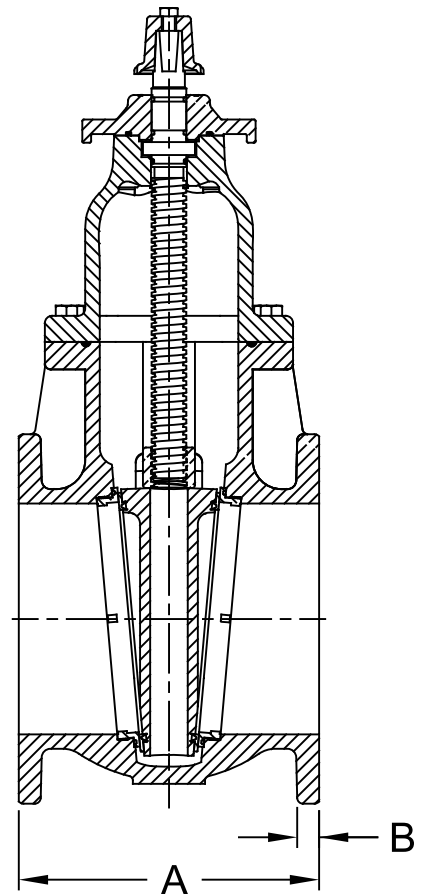


HANDWHEEL OPTION

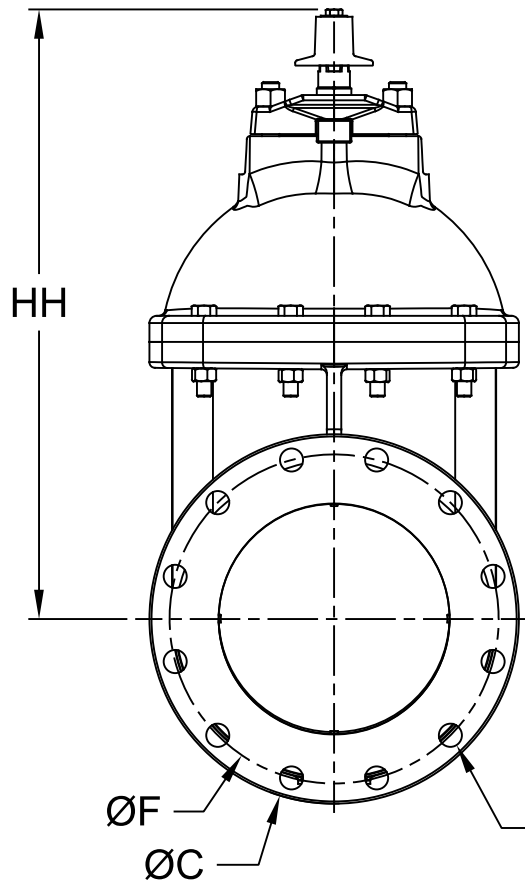

DIMENSIONS (Inches)

SIZE	A	B	C	D	E	F	GG	HH	WT (lbs)	TURN S TO OPEN
3	8.00	0.75	7.50	4	0.75	6.00	10.00	13.20	94	11
4	9.00	0.94	9.00	8	0.75	7.50	10.00	14.70	103	14
6	10.50	1.00	11.00	8	0.88	9.50	12.00	18.50	169	20
8	11.50	1.13	13.50	8	0.88	11.75	14.00	22.80	298	26
10	13.00	1.19	16.00	12	1.00	14.25	18.00	26.50	425	33
12	14.00	1.25	19.00	12	1.00	17.00	18.00	29.60	700	39

NOTE:

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE - 250PSI
3. HYDROSTATIC TEST PRESSURE - 500PSI

DESCRIPTION:

3"-12" AWWA C500 - 125# Flanged Solid Wedge Gate Valve (NRS)

DATE:

01/19/2026

DRAWING:

SG-DD0001-A

MPi MCWANE
PLANT & INDUSTRIAL

McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

