
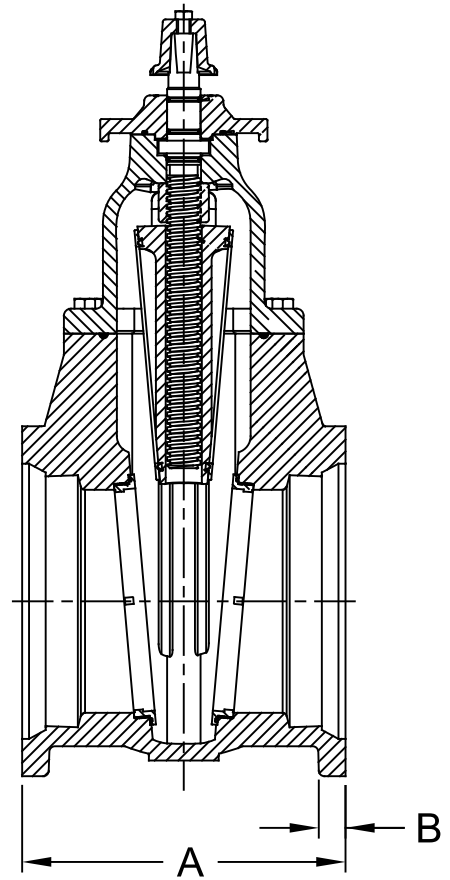


HANDWHEEL OPTION

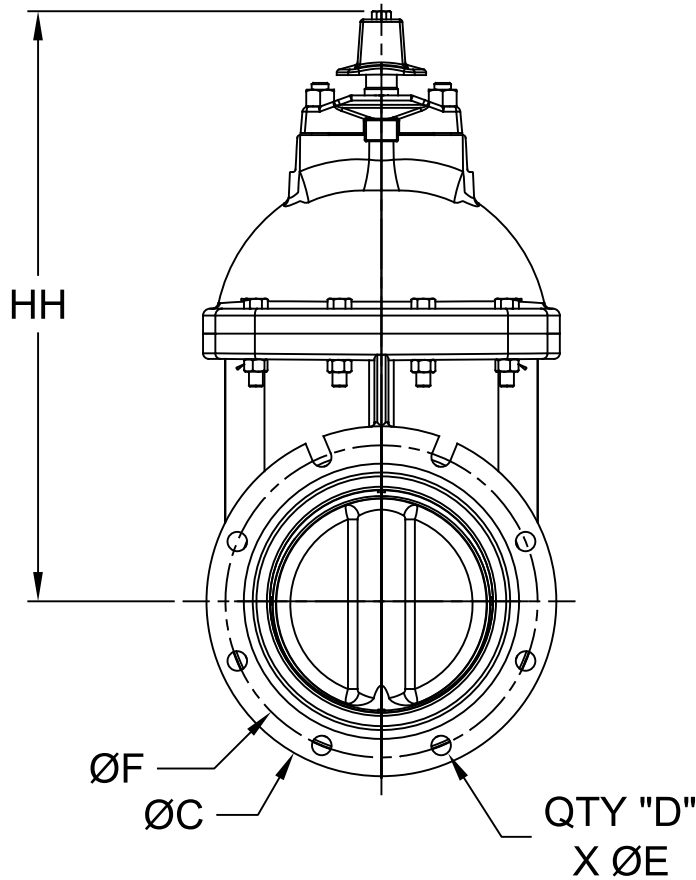

DIMENSIONS (Inches)										
SIZE	A	B	C	D	E	F	GG	HH	WT (lbs)	TURNS TO OPEN
3	9.00	0.94	7.68	4	0.75	6.19	10.00	13.25	91	11
4	11.00	1.00	9.13	4	0.88	7.50	10.00	14.75	104	14
6	12.00	1.06	11.10	6	0.88	9.50	12.00	18.50	181	20
8	13.23	1.13	13.38	6	0.88	11.75	14.00	23.06	276	26
10	14.50	1.19	15.67	8	0.88	14.00	18.00	26.50	412	33
12	15.00	1.25	17.95	8	0.88	16.25	18.00	30.00	483	39

NOTE:

1. FLANGES CONFORM TO ANSI 21.11/AWWA C111
2. COLD WORKING PRESSURE - 250PSI
3. HYDROSTATIC TEST PRESSURE - 500PSI

DESCRIPTION:

3"-12" AWWA C500 - Mechanical Joint Solid Wedge Gate Valve (NRS)

DATE:

01/19/2026

DRAWING:

SG-DD0002-A



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

