


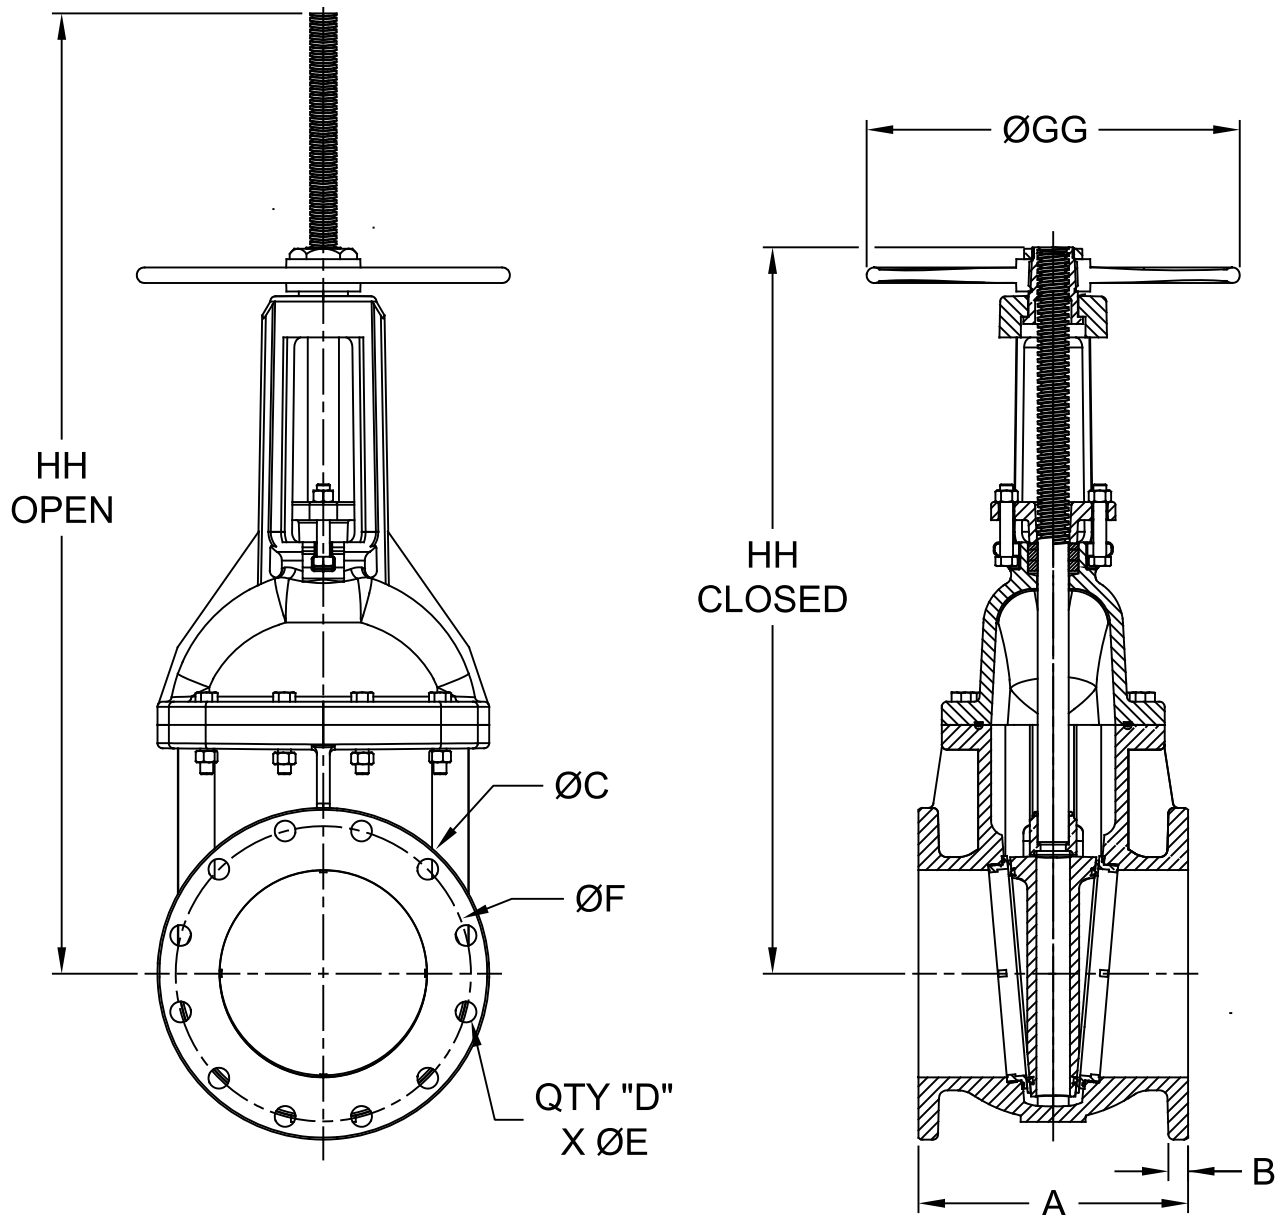

DIMENSIONS (Inches)											
SIZE	A	B	C	D	E	F	GG	HH	HH	WT (lbs)	TURNS TO OPEN
								OPEN	CLOS ED		
3	8.00	0.75	7.50	4	0.75	6.00	10.00	18.80	15.40	73	11
4	9.00	0.94	9.00	8	0.75	7.50	10.00	22.60	17.90	118	14
6	10.50	1.00	11.00	8	0.88	9.50	12.00	30.10	23.40	199	20
8	11.50	1.13	13.50	8	0.88	11.75	14.00	38.50	29.00	334	26
10	13.00	1.19	16.00	12	1.00	14.25	18.00	45.60	35.00	484	33
12	14.00	1.25	19.00	12	1.00	17.00	18.00	53.20	40.50	704	39

NOTE:

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE - 250PSI
3. HYDROSTATIC TEST PRESSURE - 500PSI

DESCRIPTION:

3"-12" AWWA C500 - 125# FLG x FLG
Solid Wedge Gate Valve (OS&Y)

DATE:

01/19/2026

DRAWING:

SG-DD0003-A

MPI MCWANE
PLANT & INDUSTRIAL

McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

