
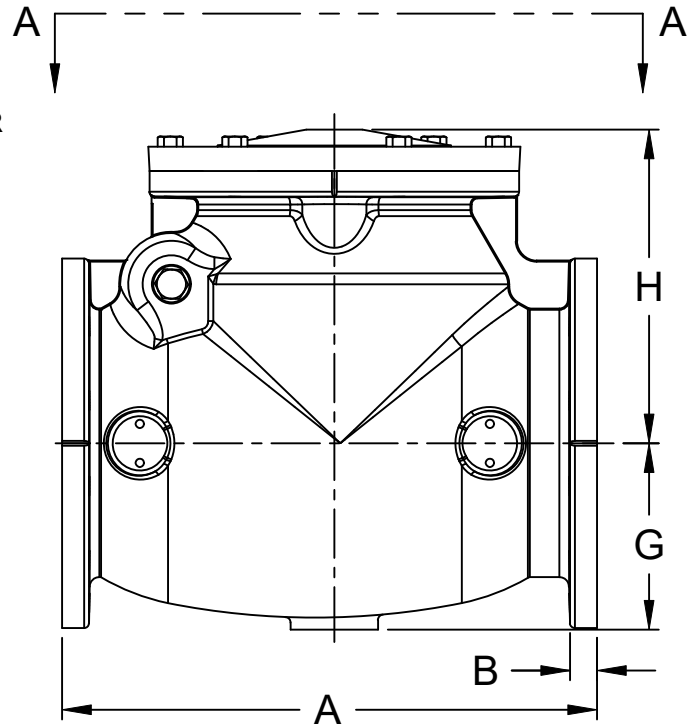
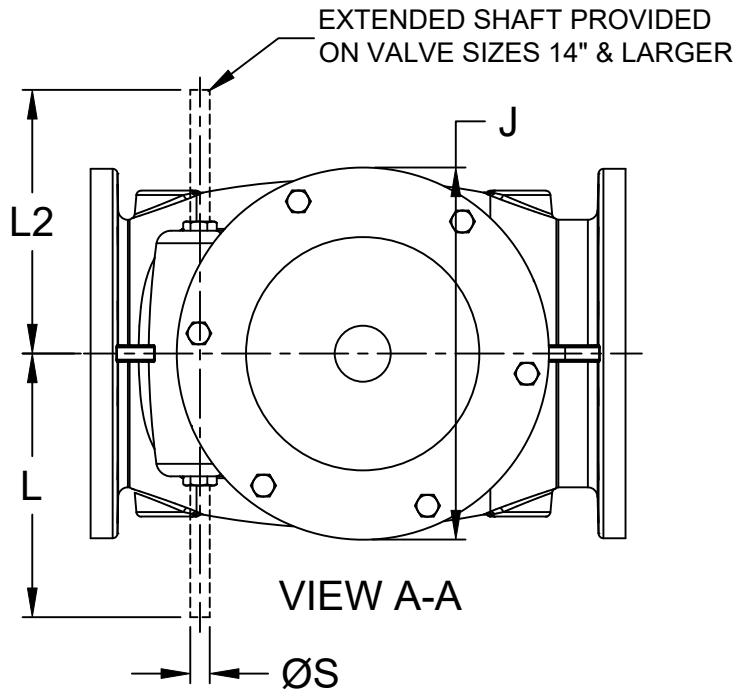


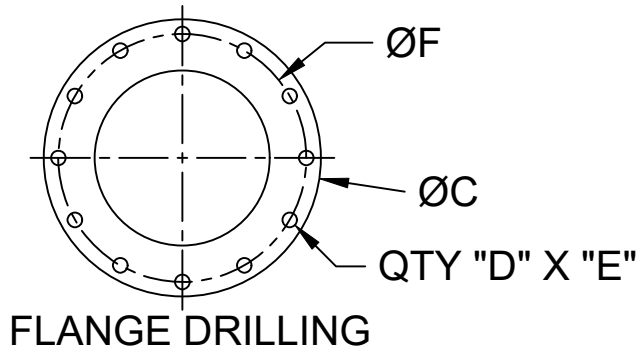

DIMENSIONS (Inches)													
SIZE	A	B	C	D	E	F	G	H	J	L	L2	S	WT (lbs)
3	9.50	0.78	7.50	4	0.75	6.00	-	6.85	7.50	-	-	-	56
4	11.50	1.00	9.00	8	0.75	7.50	-	8.69	9.00	-	-	-	95
6	14.00	1.06	11.00	8	0.88	9.50	-	10.51	11.00	-	-	-	153
8	19.50	1.25	13.50	8	0.88	11.75	-	12.56	13.50	-	-	-	310
10	24.50	1.31	16.00	12	1.00	14.25	-	14.07	16.75	-	-	-	470
12	27.50	1.38	19.00	12	1.00	17.00	-	16.13	19.00	-	-	-	672
14	31.00	1.38	21.00	12	1.12	18.75	10.75	15.97	22.38	18.50	18.50	1.25	660
16	36.00	1.44	23.50	16	1.12	21.25	11.75	18.88	25.75	19.00	19.00	1.50	870
18	40.00	1.56	25.00	16	1.25	22.75	12.63	20.30	28.25	20.75	20.75	1.75	1,075
20	40.00	1.69	27.50	20	1.25	25.00	14.00	20.63	30.50	22.50	22.50	1.75	1,311
24	48.00	1.88	32.00	20	1.38	29.50	17.50	24.25	34.88	26.00	26.00	2.00	1,806
30	56.00	2.13	38.75	28	1.38	36.00	19.63	29.88	41.00	28.25	28.25	2.00	2,720
36	63.00	2.38	46.00	32	1.63	42.75	22.63	33.88	47.00	35.00	35.00	2.63	4,090

NOTE:

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE
 - 3"-12" - 250 PSI, 14"-36" - 150 PSI
3. HYDROSTATIC TEST PRESSURE
 - 3"-12" - 500 PSI, 14"-36" - 300 PSI

DESCRIPTION:

3"-36" AWWA C508 - 125# Flanged Swing Check Valve - Plain (3306)

DATE:

01/15/2025

DRAWING:

SW-DD0001-A



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234