
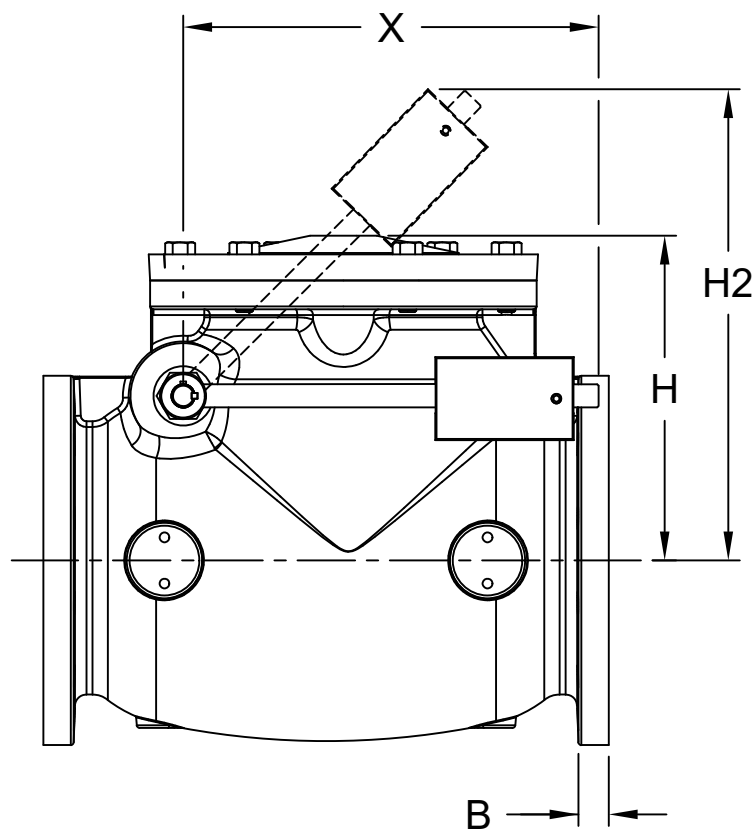
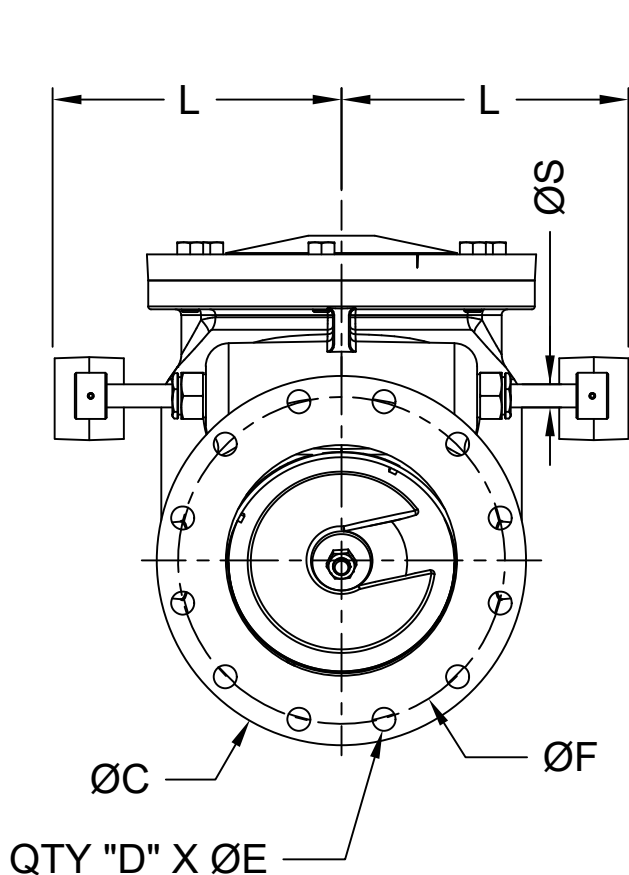


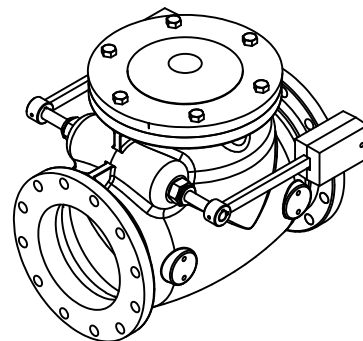

DIMENSIONS (Inches)												
SIZE	A	B	C	D	E	F	H	H2	L	S	X	WT (lbs)
3	9.50	0.78	7.50	4	0.75	6.00	6.85	9.23	6.31	0.50	6.00	62
4	11.50	1.00	9.00	8	0.75	7.50	8.69	10.58	8.75	0.63	7.75	107
6	14.00	1.06	11.00	8	0.88	9.50	10.51	13.90	9.31	0.75	9.75	167
8	19.50	1.25	13.50	8	0.88	11.75	12.56	19.63	10.88	0.88	14.13	354
10	24.50	1.31	16.00	12	1.00	14.25	14.07	23.38	12.44	1.00	18.00	502
12	27.50	1.38	19.00	12	1.00	17.00	16.13	25.20	14.81	1.00	18.00	756

NOTE:

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE - 250 PSI
3. HYDROSTATIC TEST PRESSURE - 500 PSI

DESCRIPTION:

3"-12" AWWA C508 - 125# Flanged Swing Check Valve - Dual Lever & Weight (3306)

DATE:

06/17/2026

DRAWING:

SW-DD0005-B



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

