
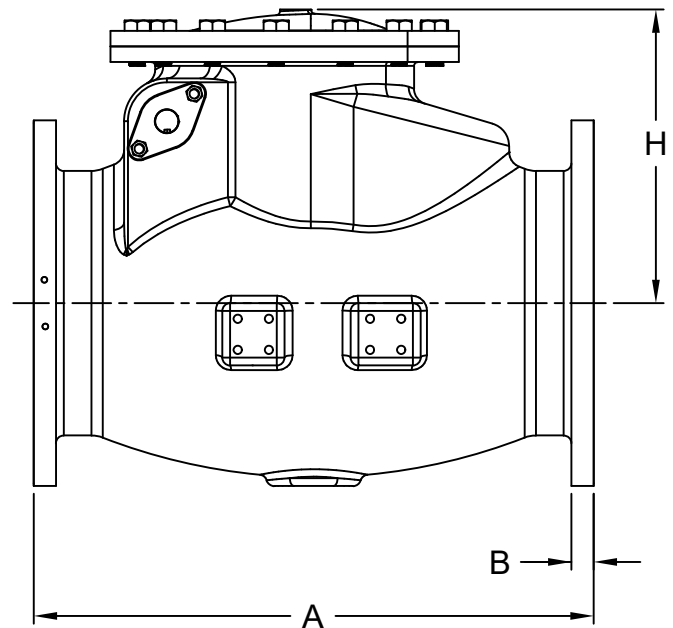
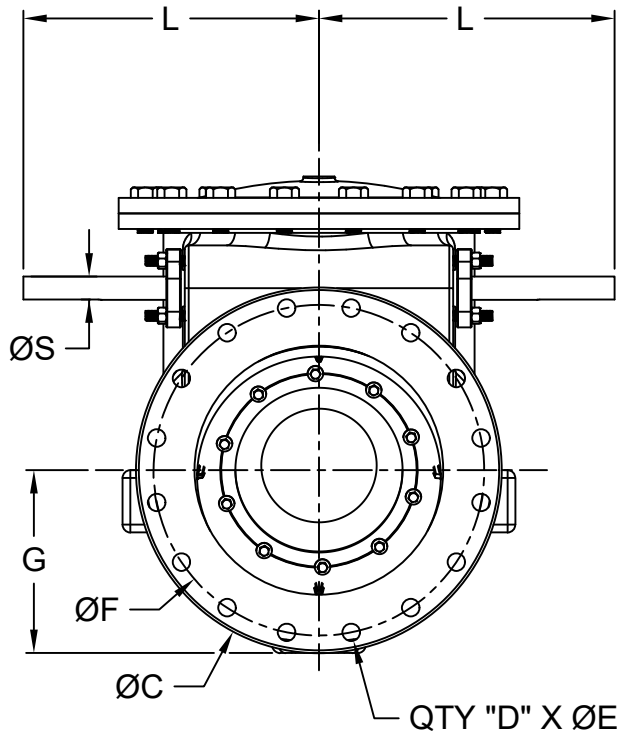


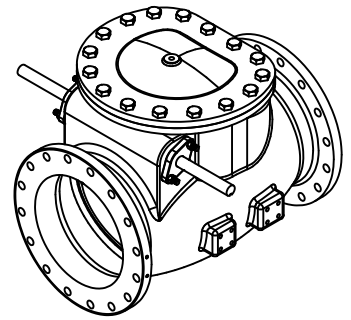

DIMENSIONS (Inches)											
SIZE	A	B	C	D	E	F	G	H	L	S	WT (lbs)
14	31.00	1.38	21.00	12	1.12	18.75	10.75	15.97	18.50	1.25	660
16	36.00	1.44	23.50	16	1.12	21.25	11.75	18.88	19.00	1.50	870
18	40.00	1.56	25.00	16	1.25	22.75	12.63	20.30	20.75	1.75	1,075
20	40.00	1.69	27.50	20	1.25	25.00	14.00	20.63	22.50	1.75	1,311
24	48.00	1.88	32.00	20	1.38	29.50	17.50	24.25	26.00	2.00	1,806
30	56.00	2.13	38.75	28	1.38	36.00	19.63	29.88	28.25	2.00	2,720
36	63.00	2.38	46.00	32	1.63	42.75	22.63	33.88	35.00	2.63	4,090

NOTE:
 1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
 2. COLD WORKING PRESSURE - 150 PSI
 3. HYDROSTATIC TEST PRESSURE - 300 PSI

DESCRIPTION: 14"-36" AWWA C508 - 125# Flanged Swing Check Valve	DATE: 06/17/2026	DRAWING: SW-DD0013-A	  
 McWane Plant & Industrial 1201 Vanderbilt Road Birmingham, AL 35234			

Products and images depicted are for general illustrative purposes only and do not represent the complete scope of supply, configuration, or country of origin. Final product details are governed solely by McWane Plant & Industrial's standard Terms and Conditions of Sale.