
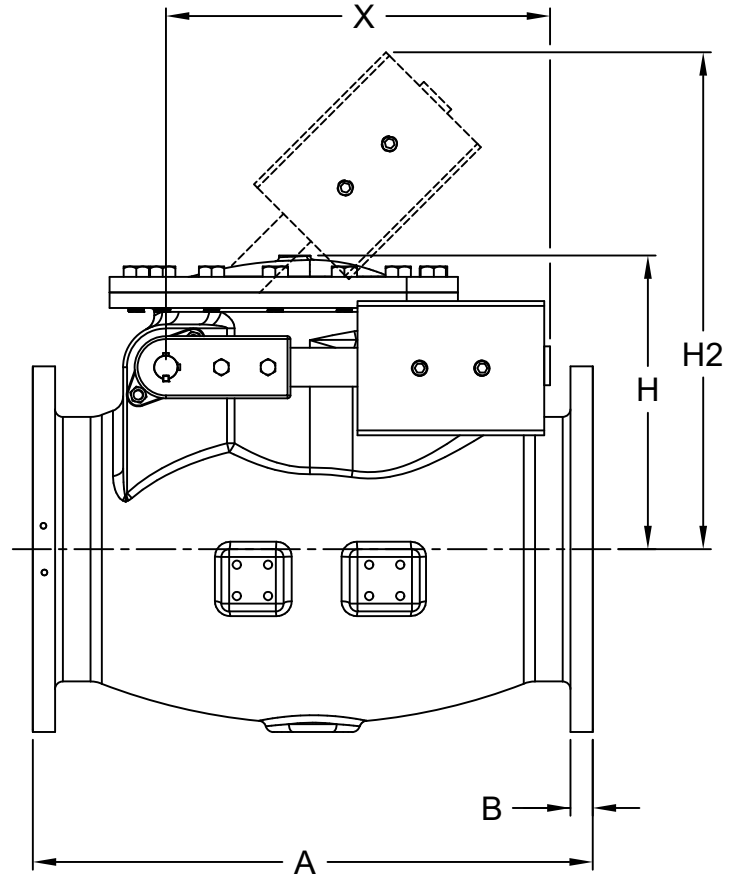
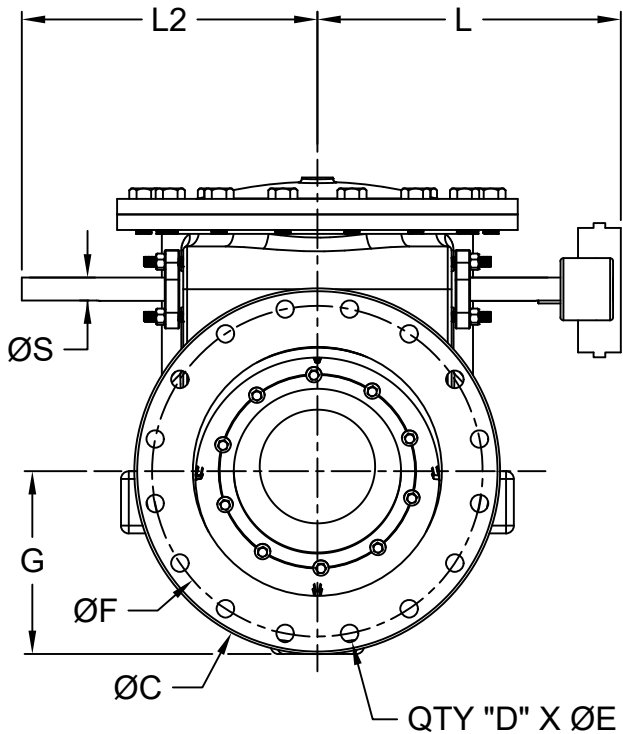


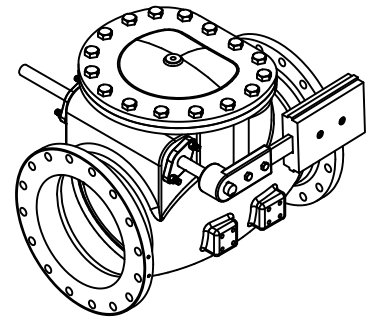

DIMENSIONS (Inches)														
SIZE	A	B	C	D	E	F	G	H	H2	L	L2	S	X	WT (lbs)
14	31.00	1.38	21.00	12	1.12	18.75	10.75	15.97	34.87	19.00	18.50	1.25	24.70	760
16	36.00	1.44	23.50	16	1.12	21.25	11.75	18.88	36.44	20.50	19.00	1.50	24.70	965
18	40.00	1.56	25.00	16	1.25	22.75	12.63	20.30	43.50	22.25	20.75	1.75	30.70	1,257
20	40.00	1.69	27.50	20	1.25	25.00	14.00	20.63	44.83	22.68	22.50	1.75	30.70	1,493
24	48.00	1.88	32.00	20	1.38	29.50	17.50	24.25	53.25	27.50	26.00	2.00	36.69	2,100
30	SEE DRAWING SW-DD0020 FOR DUAL LEVER & WEIGHT CONFIGURATION													
36														

NOTE:

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE - 150 PSI
3. HYDROSTATIC TEST PRESSURE - 300 PSI

DESCRIPTION:

14"-36" AWWA C508 - 125# Flanged Swing Check Valve with Lever & Weight

DATE:

03/19/2026

DRAWING:

SW-DD0014-A



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

