
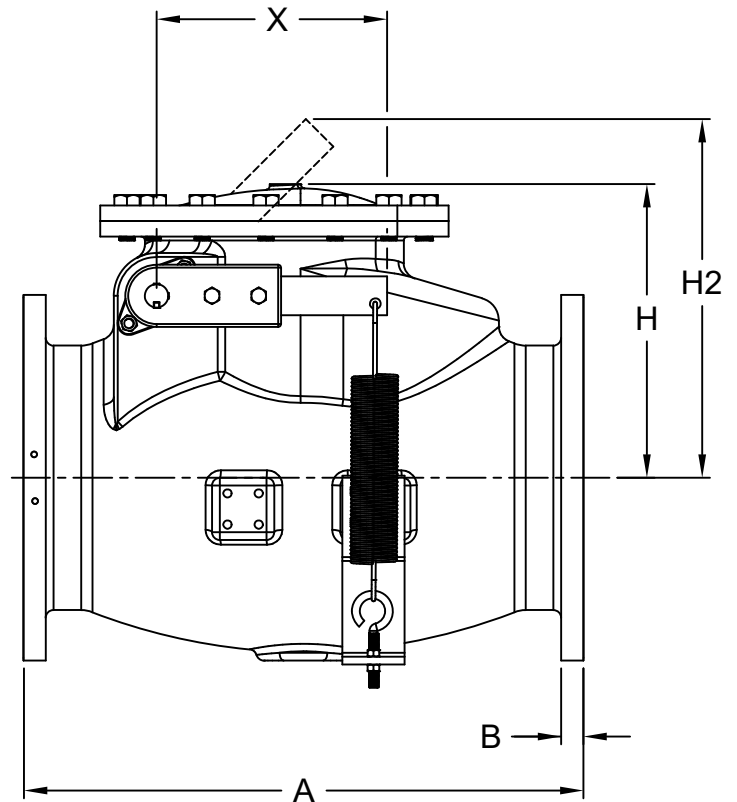
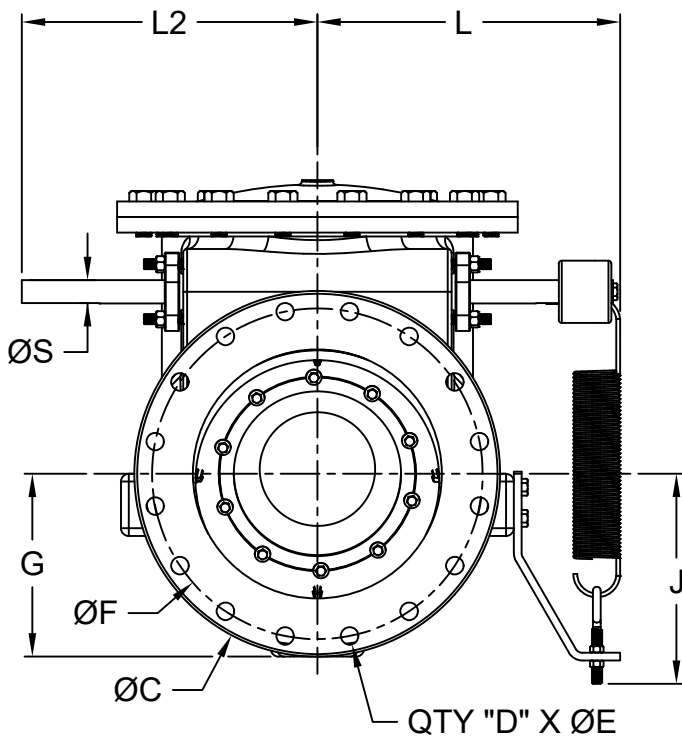


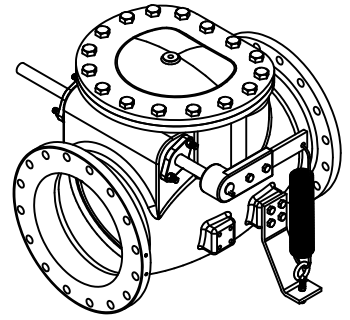

DIMENSIONS (Inches)

SIZE	A	B	C	D	E	F	G	H	H2	J	L	L2	S	X	WT (lbs)
14	31.00	1.38	21.00	12	1.12	18.75	10.75	15.97	24.50	22.38	18.58	18.50	1.25	14.81	695
16	36.00	1.44	23.50	16	1.12	21.25	11.75	18.88	26.25	25.75	19.38	19.00	1.50	14.81	908
18	40.00	1.56	25.00	16	1.25	22.75	12.63	20.30	27.94	28.25	20.75	20.75	1.75	15.45	1,114
20	40.00	1.69	27.50	20	1.25	25.00	14.00	20.63	28.50	30.50	22.50	22.50	1.75	15.45	1,351
24	48.00	1.88	32.00	20	1.38	29.50	17.50	24.25	31.06	34.88	26.00	26.00	2.00	15.45	1,847
30	SEE DRAWING SW-DD0023 FOR DUAL LEVER & SPRING CONFIGURATION														

NOTE:

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE - 150 PSI
3. HYDROSTATIC TEST PRESSURE - 300 PSI

DESCRIPTION:

14\"-30\" AWWA C508 - 125# Flanged Swing Check Valve with Lever & Spring

DATE:

06/17/2026

DRAWING:

SW-DD0015-A



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

