
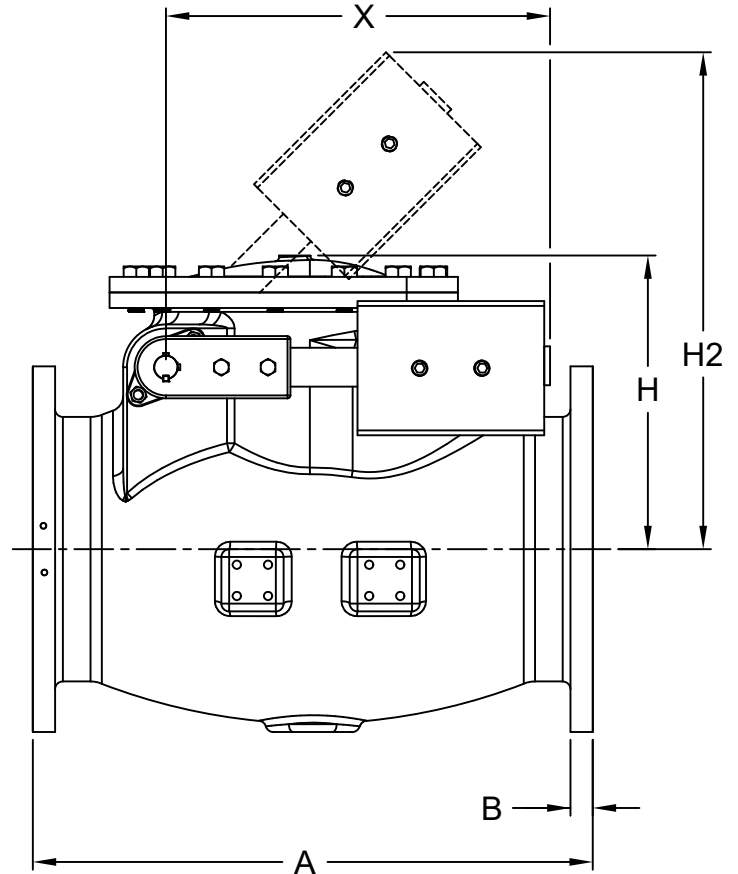
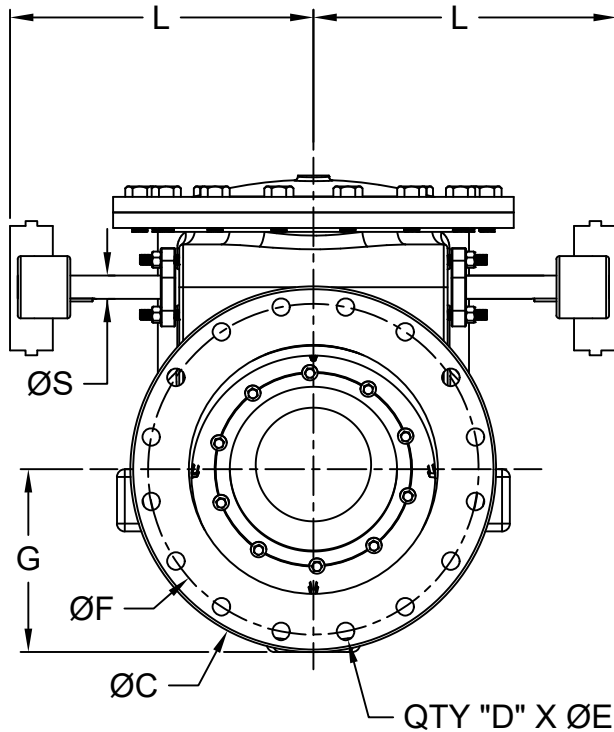


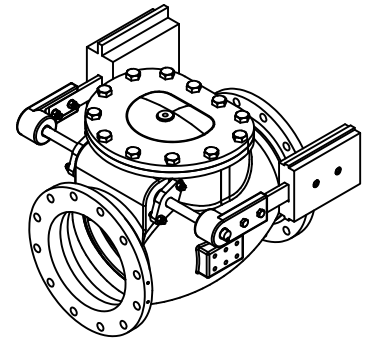

DIMENSIONS (Inches)													
SIZE	A	B	C	D	E	F	G	H	H2	L	S	X	WT (lbs)
14	31.00	1.38	21.00	12	1.12	18.75	10.75	15.97	34.44	19.00	1.25	24.70	860
16	36.00	1.44	23.50	16	1.12	21.25	11.75	18.88	36.19	20.50	1.50	24.70	1,060
18	40.00	1.56	25.00	16	1.25	22.75	12.63	20.30	40.00	22.25	1.75	30.70	1,439
20	40.00	1.69	27.50	20	1.25	25.00	14.00	20.63	44.13	22.68	1.75	30.70	1,675
24	48.00	1.88	32.00	20	1.38	29.50	17.50	24.25	53.25	27.50	2.00	36.69	2,394
30	56.00	2.13	38.75	28	1.38	36.00	19.63	29.88	56.63	29.75	2.00	36.69	3,490
36	63.00	2.38	46.00	32	1.63	42.75	22.63	33.88	61.25	35.50	2.63	37.00	4,910

NOTE:

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE - 150 PSI
3. HYDROSTATIC TEST PRESSURE - 300 PSI

DESCRIPTION:

14"-36" AWWA C508 - 125# Flanged Swing Check Valve with Dual Lever & Weight

DATE:

06/17/2026

DRAWING:

SW-DD0020-A



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

