
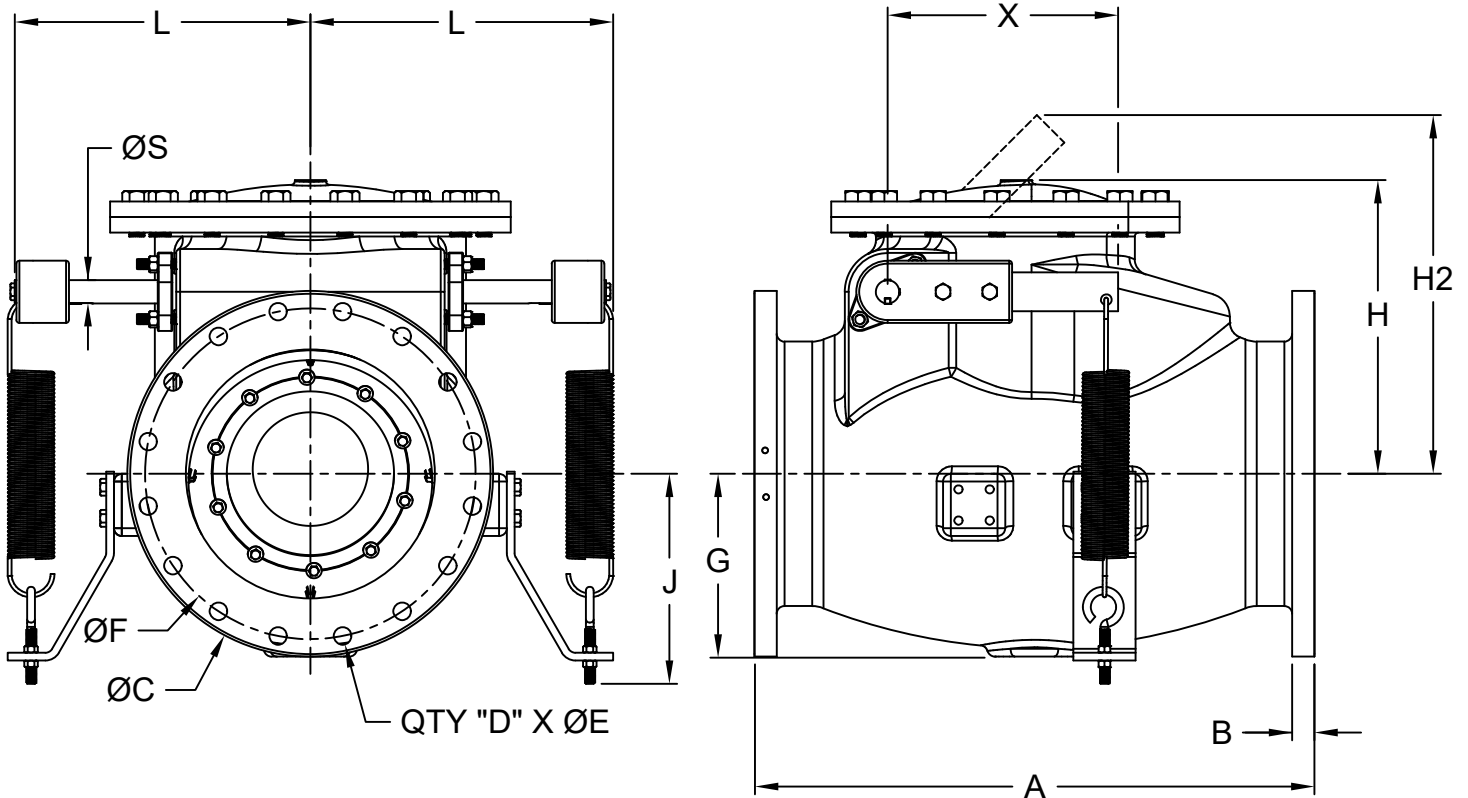


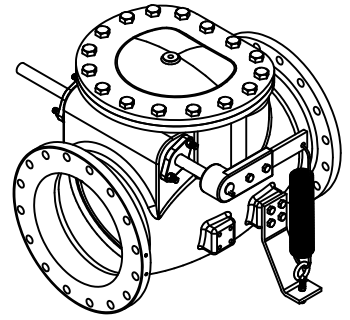

DIMENSIONS (Inches)

SIZE	A	B	C	D	E	F	G	H	H2	J	L	S	X	WT (lbs)
14	31.00	1.38	21.00	12	1.12	18.75	10.75	15.97	24.50	22.38	18.58	1.25	14.81	730
16	36.00	1.44	23.50	16	1.12	21.25	11.75	18.88	26.25	25.75	19.38	1.50	14.81	946
18	40.00	1.56	25.00	16	1.25	22.75	12.63	20.30	27.94	28.25	20.75	1.75	15.45	1,153
20	40.00	1.69	27.50	20	1.25	25.00	14.00	20.63	28.50	30.50	22.50	1.75	15.45	1,391
24	48.00	1.88	32.00	20	1.38	29.50	17.50	24.25	31.06	34.88	26.00	2.00	15.45	1,888
30	56.00	2.13	38.75	28	1.38	36.00	19.63	29.88	34.38	41.00	28.25	2.00	15.45	3,489

NOTE:

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE - 150 PSI
3. HYDROSTATIC TEST PRESSURE - 300 PSI

DESCRIPTION:

14"-30" AWWA C508 - 125# Flanged Swing Check Valve with Lever & Spring

DATE:

06/17/2026

DRAWING:

SW-DD0015-A



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

