


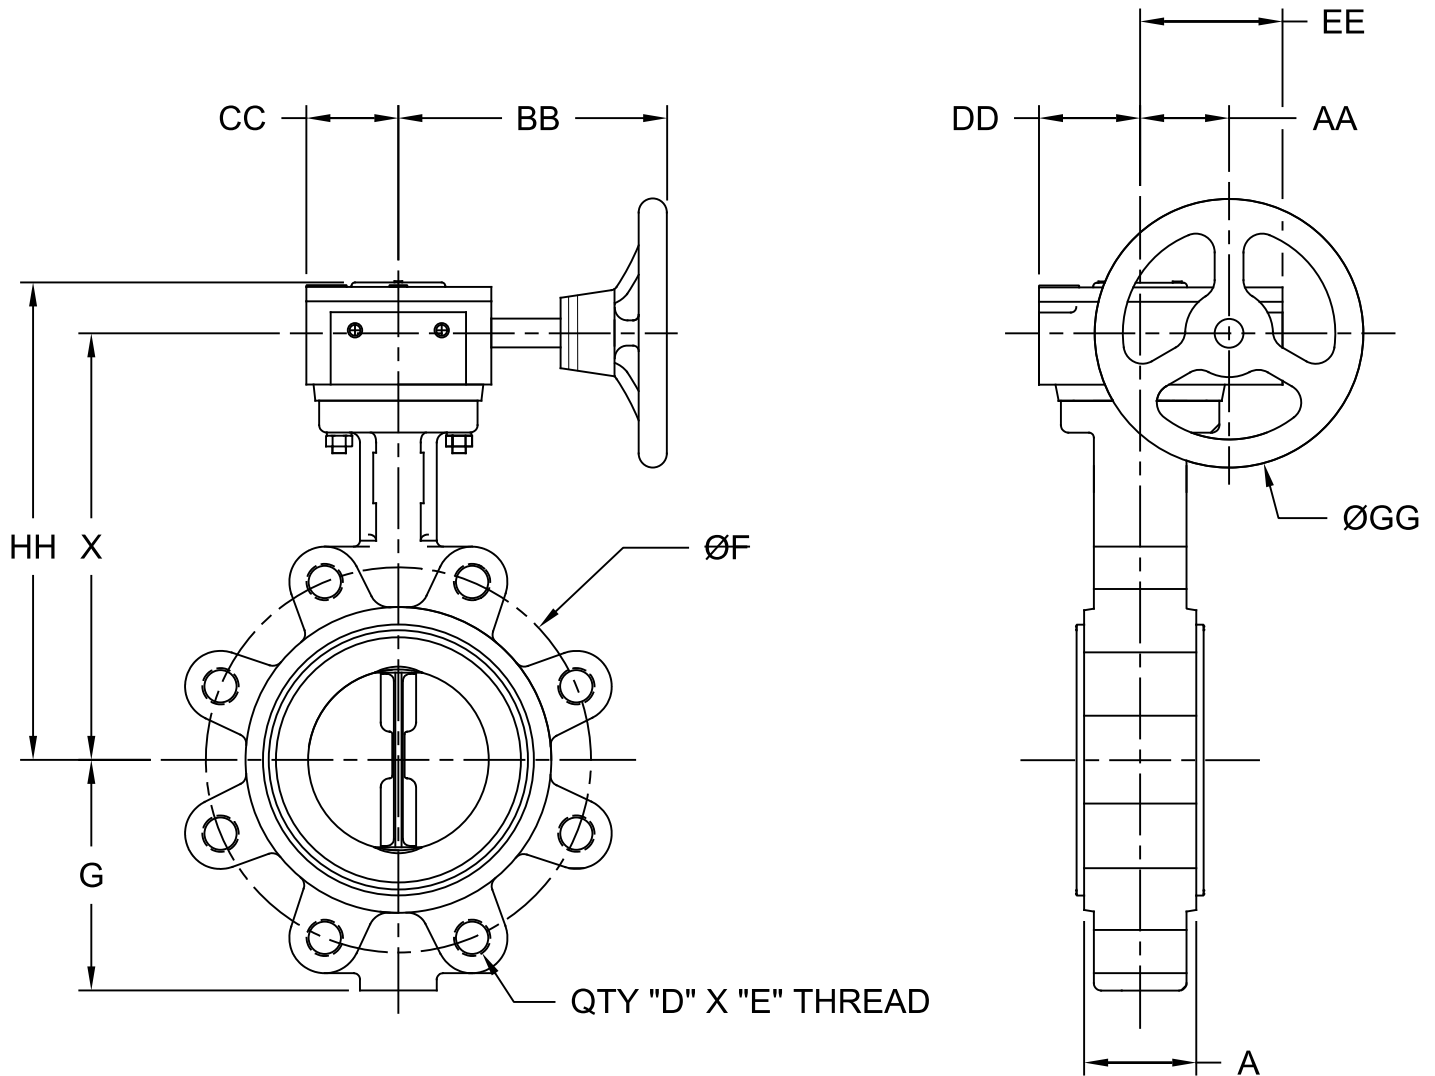

DIMENSIONS (Inches)

SIZE	A	D	E	F	G	X	AA	BB	CC	DD	EE	GG	HH	WT (lbs.)	ACT MODEL
2	1.70	4	5/8"-11	4.75	3.15	6.77	1.81	6.08	2.07	2.07	3.10	5.75	7.99	16	RS-2410-01
2.5	1.81	4	5/8"-11	5.50	3.50	7.17	1.81	6.08	2.07	2.07	3.10	5.75	8.40	17	RS-2410-01
3	1.81	4	5/8"-11	6.00	3.74	7.48	1.81	6.08	2.07	2.07	3.10	5.75	8.70	19	RS-2410-01
4	2.05	8	5/8"-11	7.50	4.49	8.19	1.81	6.08	2.07	2.07	3.10	5.75	9.40	25	RS-2410-01
5	2.20	8	3/4"-10	8.50	5.00	8.75	1.81	6.08	2.07	2.07	3.10	5.75	9.97	30	RS-2410-01
6	2.20	8	3/4"-10	9.50	5.47	9.60	1.81	6.08	2.07	2.07	3.10	5.75	10.83	33	RS-2410-01
8	2.36	8	3/4"-10	11.75	6.89	10.75	2.42	8.86	2.80	2.80	3.78	11.60	12.34	62	RS-3010-02
10	2.68	12	7/8"-9	14.25	7.99	11.93	2.42	8.86	2.80	2.80	3.78	11.60	13.52	86	RS-3010-02
12	3.07	12	7/8"-9	17.00	9.53	13.51	3.37	8.90	3.07	3.07	4.10	11.60	15.16	119	RS-5010-01
14	3.07	12	1"-8	18.75	10.51	15.99	3.37	8.90	3.07	3.07	4.10	11.60	17.64	142	RS-5010-01

DESCRIPTION:

2"-14" API 609 - 150# Lug Body Resilient Seated
BFV with Gear and Handwheel

DATE:

08/13/2024

DRAWING:

TS-DD0004-A



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234