
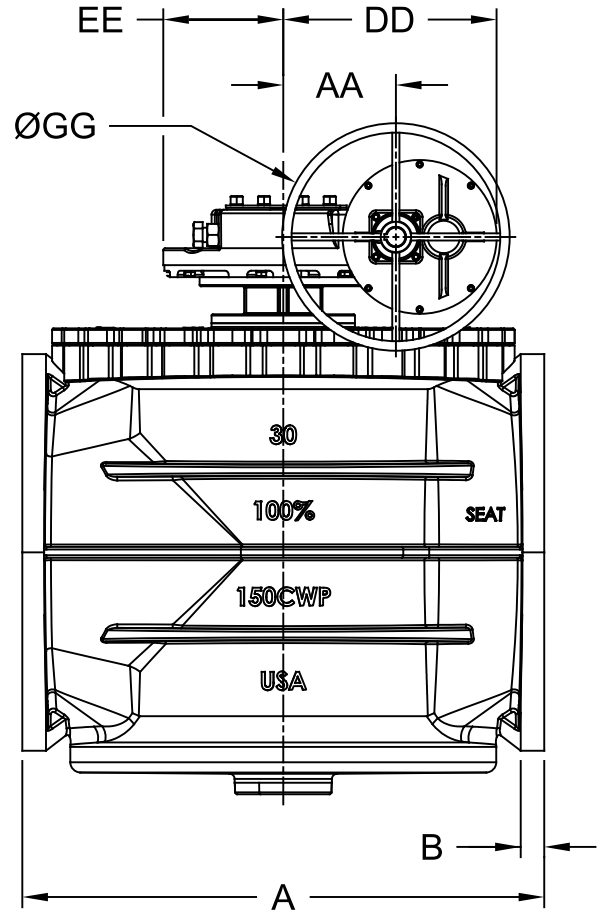


OPERATING NUT OPTION FOR
PLANT & BURIED SERVICE

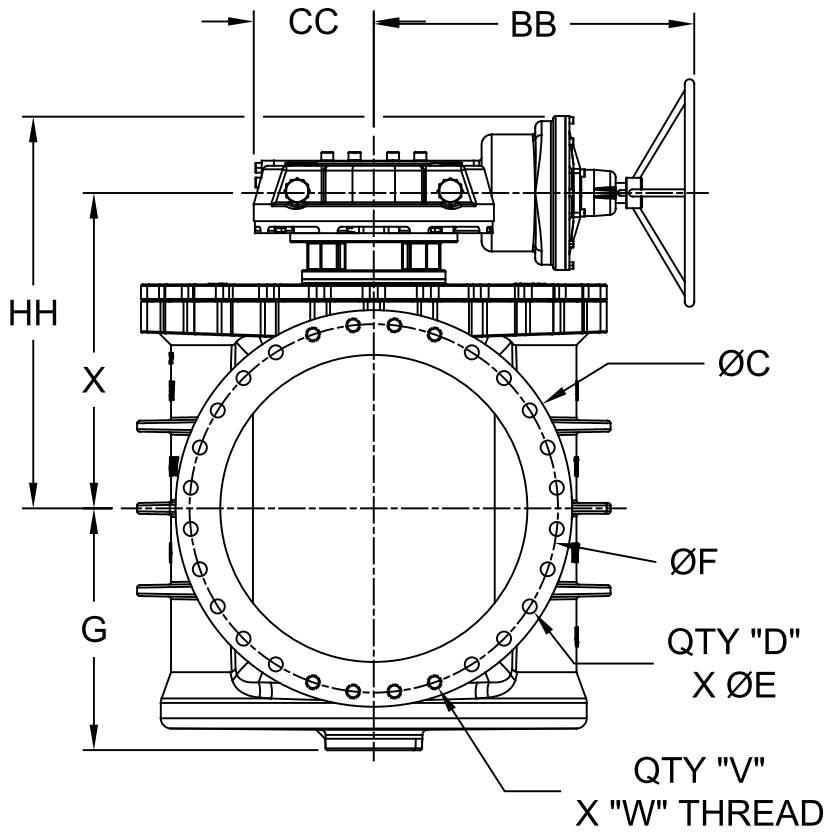

DIMENSIONS (Inches)

SIZE	A	B	C	D	E	F	G	V	W	X	AA	BB	BB1	CC	DD	EE	GG	HH	WT (lbs)	ACT. MODEL	TURNS TO OPEN
18	21.50	1.58	25.00	8	1.25	22.75	18.30	8	1 1/8"-7 11.50	21.50	4.49	17.70	15.50	7.38	10.75	7.38	30.00	27.60	1,270	IW6 152:1	38
20	23.50	1.69	27.50	12	1.25	25.00	17.40	8	1 1/8"-7 11.25	22.25	4.49	17.70	15.50	7.38	10.75	7.38	30.00	28.60	1,545	IW6 228:1	57
24	42.00	1.88	32.00	12	1.38	29.50	21.80	8	1 1/4"-7 12.00	28.00	3.58	23.80	21.60	8.86	13.98	8.86	30.00	35.40	3,429	IW7 384:1	96
30	51.00	2.13	38.75	20	1.38	36.00	22.50	8	1 1/4"-7 12.63	30.70	3.93	29.90	27.20	11.73	19.01	11.73	30.00	37.20	6,145	IW9 696:1	174
36	60.00	2.38	46.00	24	1.63	42.75	27.70	8	1 1/2"-6 13.50	34.75	3.93	29.90	27.20	11.73	19.01	11.73	40.00	42.30	8,532	IW9 928:1	232
42	72.00	2.63	53.00	32	1.63	49.50	37.40	4	1 1/2"-6 THRU	49.77	9.69	43.90	41.00	19.14	27.90	19.14	24.00	60.03	16,291	IW12 2374:1	594
48	84.00	2.75	59.50	40	1.63	56.00	40.16	4	1 1/2"-6 THRU	53.90	6.69	43.90	41.00	19.14	27.90	19.14	28.00	64.17	21,310	IW12 2374:1	594

NOTE:

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE - 150 PSI
3. HYDROSTATIC TEST PRESSURE:
3"-12" = 230 PSI, 14"-48" = 270 PSI

DESCRIPTION:

18"-48" AWWA C517 - 125# FLG Eccentric Plug
Valve w/ Worm Gear Actuator

DATE:

07/22/2026

DRAWING:

EP-DD0004-C



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

