


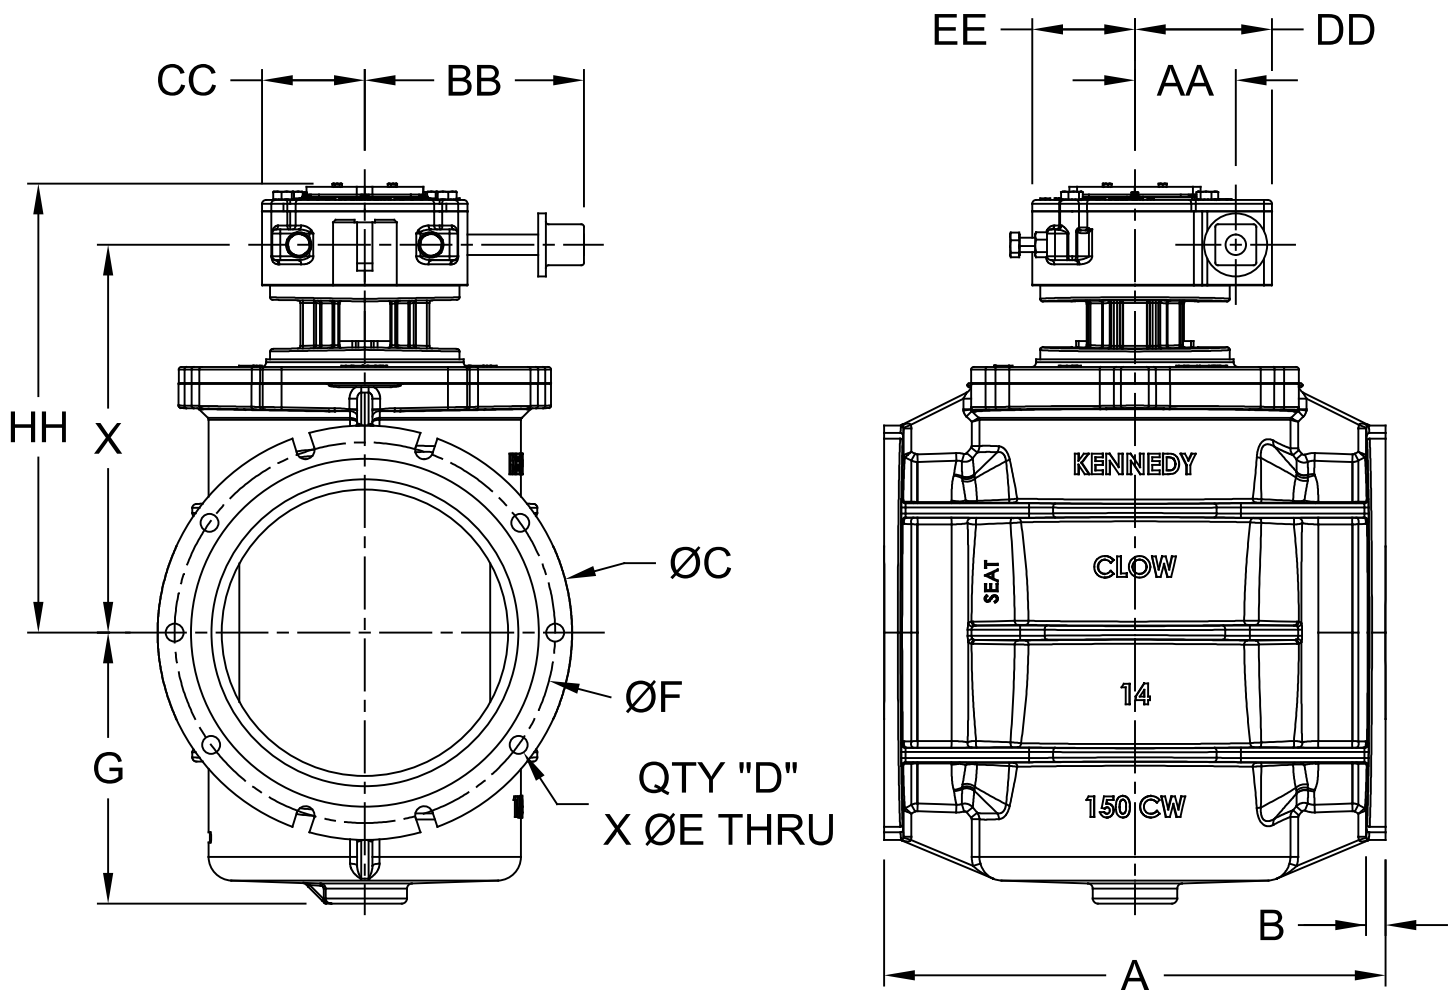

DIMENSIONS (Inches)

SIZE	A	B	C	D	E	F	G	X	AA	BB	CC	DD	EE	HH	WT (lbs)	ACT. MODEL	TURNS TO OPEN
3	11.50	0.58	7.62	4	0.75	6.19	3.88	7.50	2.80	9.00	2.46	4.25	4.00	9.35	75	JPM12B	10
4	14.25	0.60	9.06	4	0.88	7.50	4.69	8.28	2.80	9.00	2.46	4.25	4.00	10.13	100	JPM12B	10
6	15.75	0.63	11.06	6	0.88	9.50	5.62	10.30	2.80	9.40	4.14	4.25	4.14	12.27	165	JPM12FB	10
8	17.36	0.66	13.40	6	0.88	11.75	7.67	12.54	2.80	9.40	4.14	4.25	4.14	14.51	230	JPM12FB	10
10	19.37	0.70	15.62	8	0.88	14.00	9.00	14.02	3.90	10.08	3.94	5.51	5.52	16.18	340	JPM14B	13
12	20.75	0.73	17.88	8	0.88	16.25	11.32	16.38	3.90	10.08	3.94	5.51	5.52	18.54	480	JPM14B	13
14	24.50	0.79	20.25	10	0.88	18.75	14.25	18.00	4.90	10.71	5.02	6.69	6.30	21.08	720	JPM15B	17
16	27.25	0.85	22.50	12	0.88	21.00	15.75	22.50	4.90	10.71	5.02	6.69	6.30	25.58	850	JPM15B	17

NOTE:

1. ENDS CONFORM TO ANSI 21.11/AWWA C111
2. COLD WORKING PRESSURE
3"-12" - 175 PSI, 14"-16" - 150 PSI
3. HYDROSTATIC TEST PRESSURE:
3"-12" = 270 PSI, 14"-48" = 230 PSI

DESCRIPTION:

3"-16" AWWA C517 - MJ Eccentric Plug Valve w/
Worm Gear Actuator

DATE:

07/22/2026

DRAWING:

EP-DD0005-D

MPI MCWANE
PLANT & INDUSTRIAL

McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

