


No.	PART	MATERIAL
1	Body	Carbon Steel, ASTM A216 - GR WCB, or Stainless Steel, ASTM A351 - GR CF8M
2	Retainer Ring	Carbon Steel, ASTM A216 - GR WCB, or Stainless Steel, ASTM A351 - GR CF8M
3	Disc	Stainless Steel, ASTM A351 - GR CF8M
4	Seat	MPTFE
5	Stem	Stainless Steel, ASTM A564 - T630
6	V-Packing	PTFE
7	Bushing	Stainless Steel Backed RTFE
8	Taper Pin	Stainless Steel, ASTM A182 - T316
9	Gland Bushing	Stainless Steel, ASTM A351 - GR CF8M
10	Gland Flange	Stainless Steel, ASTM A351 - GR CF8M
11	Anti-Blowout Pin	Stainless Steel, ASTM A182 - T316
12	Thrust Bearing	PTFE
13	Thrust Ring	Stainless Steel, ASTM A351 - GR CF8M
14	Gasket	PTFE
15	End Plate	Carbon Steel, ASTM A216 - GR WCB, or Stainless Steel, ASTM A351 - GR CF8M
16	Hardware	Stainless Steel, ASTM A182 - T316

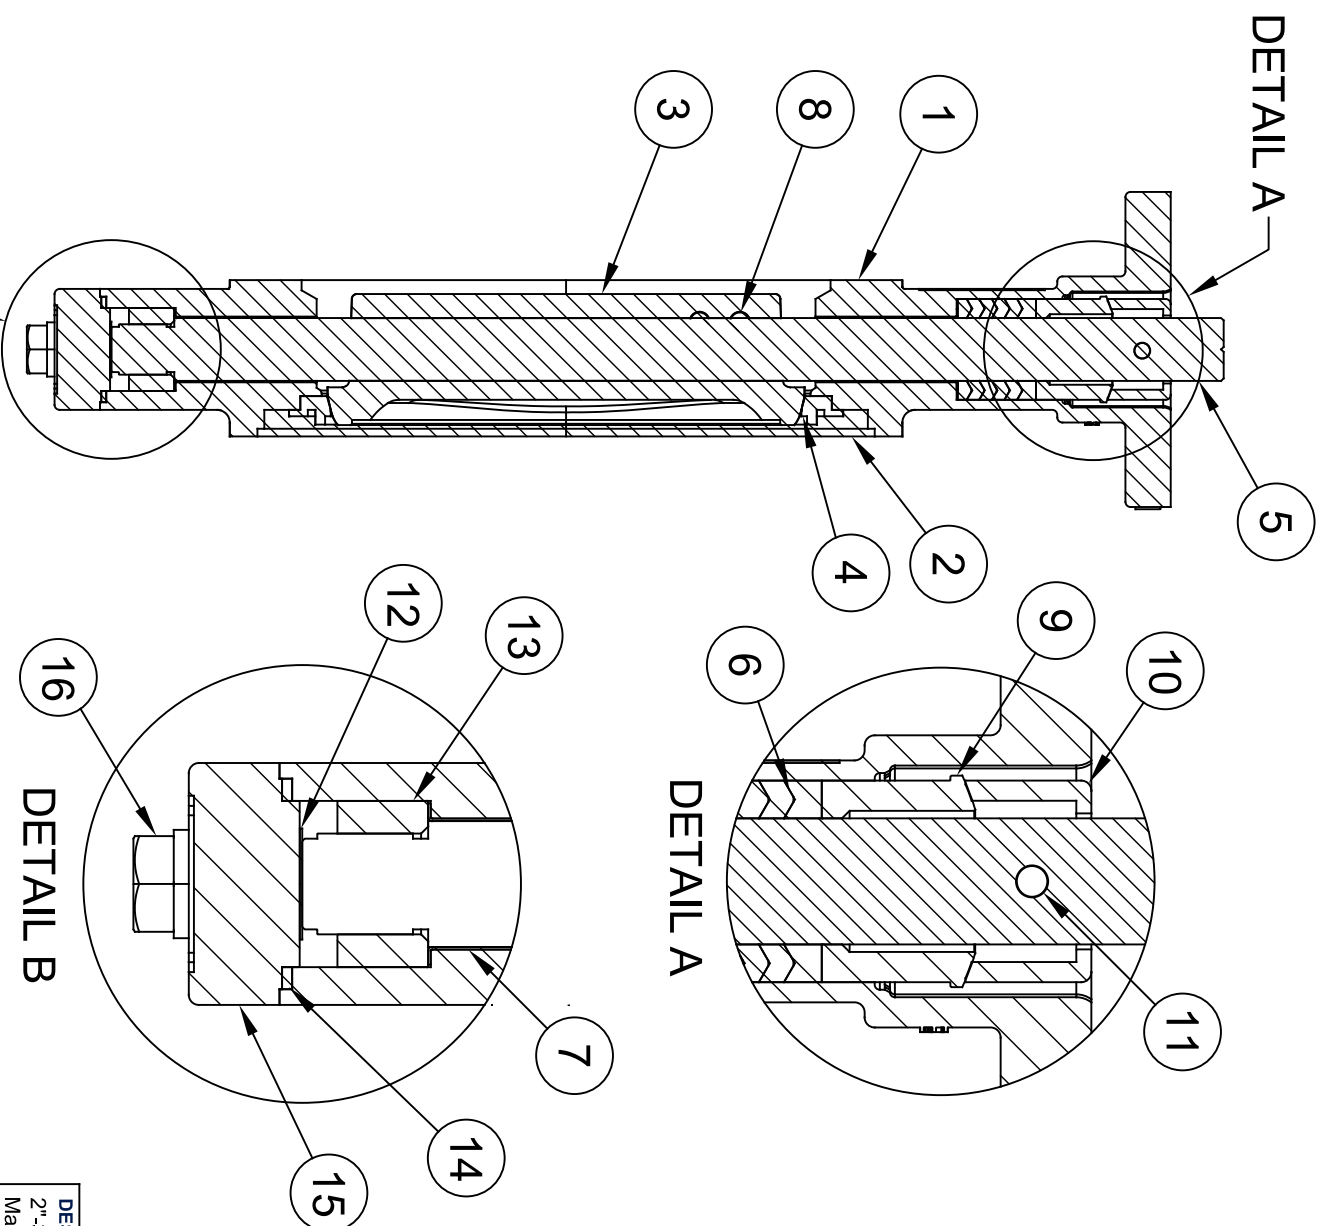

DESCRIPTION: 2"-36" API 609 High Performance Butterfly Valve Materials of Construction	DATE: 09/02/24	DRAWING: TS-MC0004-A
---	--------------------------	--------------------------------

McWANE
 PLANT & INDUSTRIAL

McWane Plant & Industrial
 1201 Vanderbilt Road
 Birmingham, AL 35234

Products and images depicted are for general illustrative purposes only and do not represent the complete scope of supply, configuration, or country of origin. Final product details are governed solely by McWane Plant & Industrial's standard Terms and Conditions of Sale.