
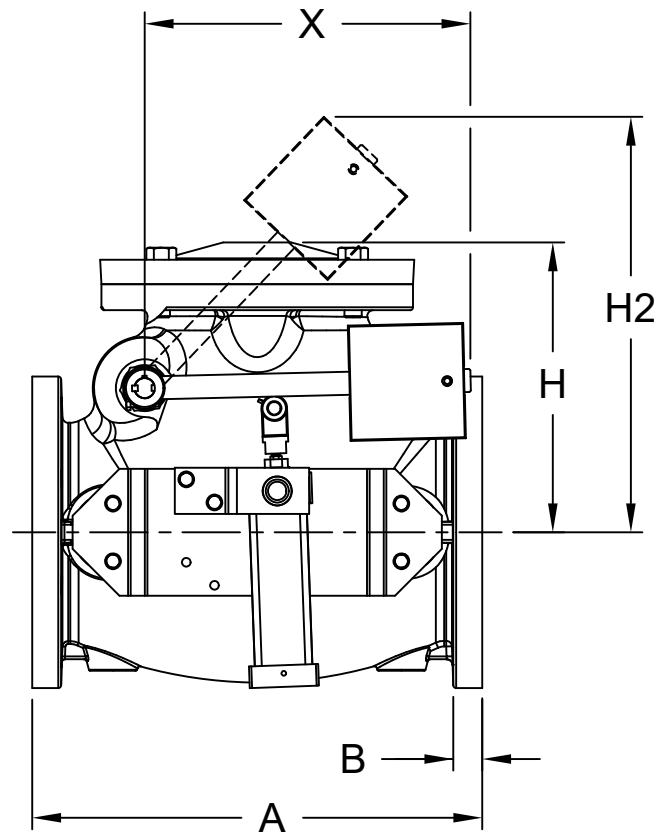
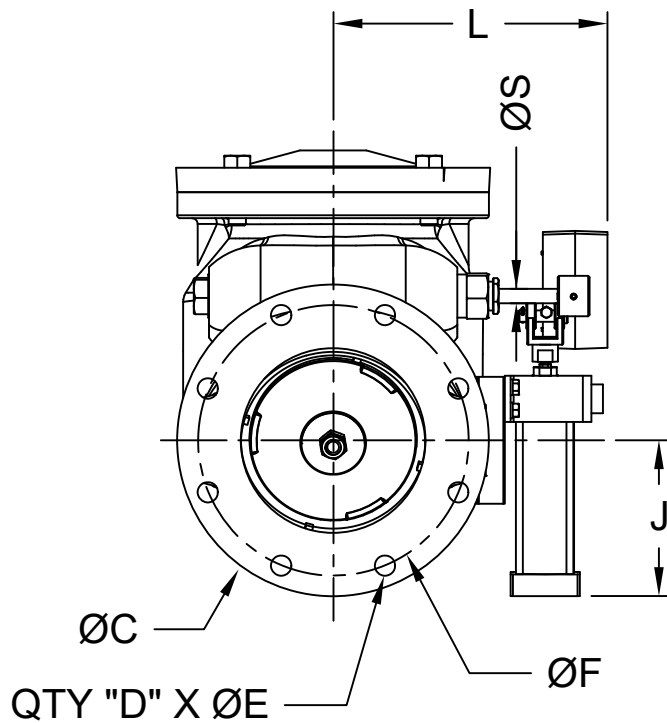




DIMENSIONS (Inches)

SIZE	A	B	C	D	E	F	H	H2	J	L	S	X	WT (lbs)
3	9.50	0.78	7.50	4	0.75	6.00	6.85	14.21	8.31	8.13	0.50	12.00	85
4	11.50	1.00	9.00	8	0.75	7.50	8.69	13.77	9.31	9.56	0.63	12.00	150
6	14.00	1.06	11.00	8	0.88	9.50	10.51	19.28	7.12	10.38	0.75	18.00	226
8	19.50	1.25	13.50	8	0.88	11.75	12.56	22.24	6.75	11.75	0.88	18.00	402
10	24.50	1.31	16.00	12	1.00	14.25	14.07	23.62	11.60	13.68	1.00	18.00	613
12	27.50	1.38	19.00	12	1.00	17.00	16.13	24.57	10.57	14.94	1.00	18.00	862

NOTE:

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE - 250 PSI
3. HYDROSTATIC TEST PRESSURE - 500 PSI
4. CONFIGURATION SHOWN DOES NOT APPLY TO VERTICAL INSTALLATIONS.

DESCRIPTION:

3"-12" AWWA C508 - 125# Flanged Swing Check Valve - Air Cushion (1106, AIS/BABA)

DATE:

09/15/2026

DRAWING:

SW-DD0010-A



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

