
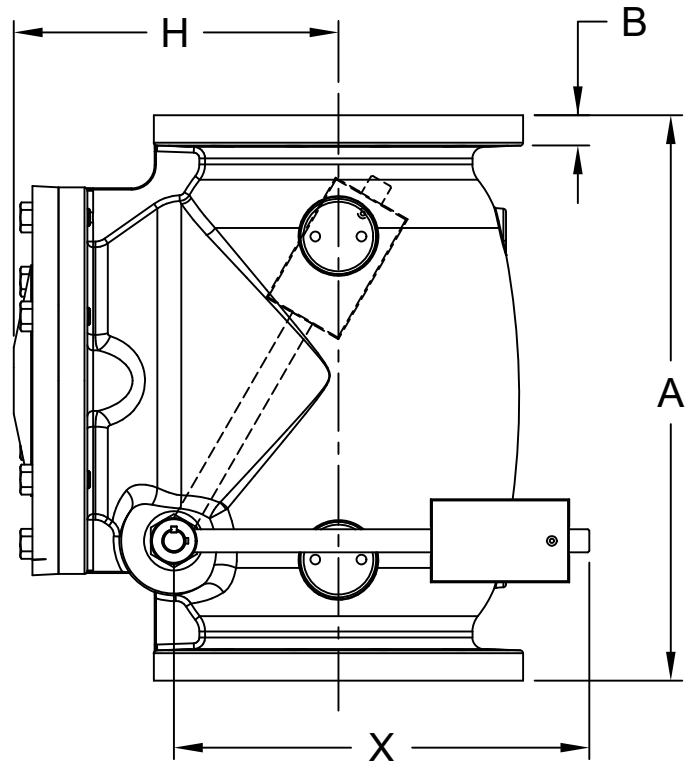
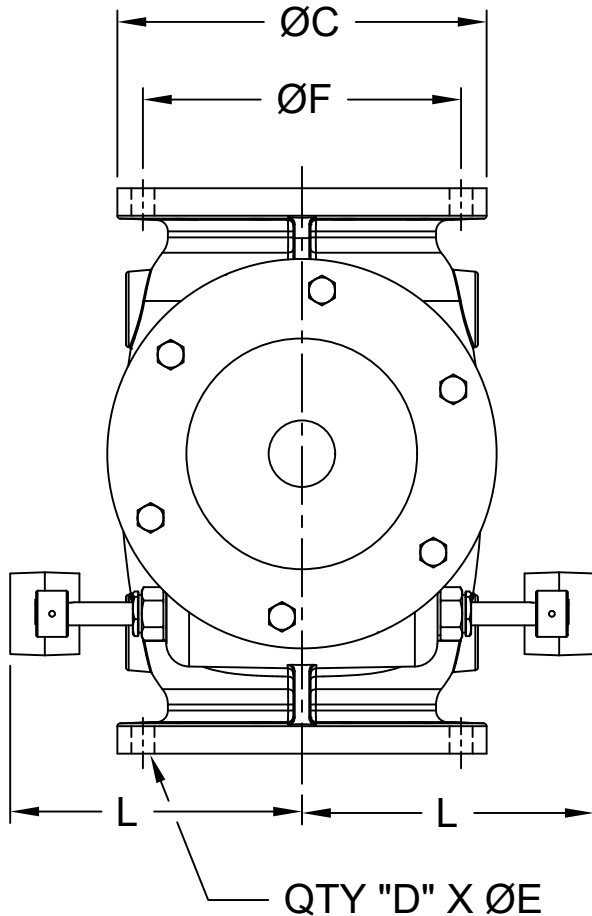


↑  
FLOW UP ONLY

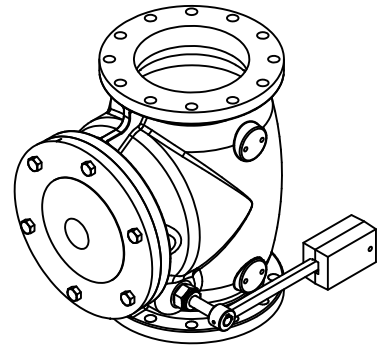

**DIMENSIONS (Inches)**

| SIZE | A     | B    | C     | D  | E    | F     | H     | L     | S    | X     | WT (lbs) |
|------|-------|------|-------|----|------|-------|-------|-------|------|-------|----------|
| 3    | 9.50  | 0.78 | 7.50  | 4  | 0.75 | 6.00  | 6.85  | 6.31  | 0.50 | 6.00  | 62       |
| 4    | 11.50 | 1.00 | 9.00  | 8  | 0.75 | 7.50  | 8.69  | 8.75  | 0.63 | 7.75  | 107      |
| 6    | 14.00 | 1.06 | 11.00 | 8  | 0.88 | 9.50  | 10.51 | 9.31  | 0.75 | 9.75  | 167      |
| 8    | 19.50 | 1.25 | 13.50 | 8  | 0.88 | 11.75 | 12.56 | 10.88 | 0.88 | 14.13 | 354      |
| 10   | 24.50 | 1.31 | 16.00 | 12 | 1.00 | 14.25 | 14.07 | 12.44 | 1.00 | 18.00 | 502      |
| 12   | 27.50 | 1.38 | 19.00 | 12 | 1.00 | 17.00 | 16.13 | 14.81 | 1.00 | 18.00 | 756      |

**NOTE:**

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE - 250 PSI
3. HYDROSTATIC TEST PRESSURE - 500 PSI

**DESCRIPTION:**

3"-12" AWWA C508 - 125# Flanged Swing Check Valve - Dual Lever & Weight, Vertical Install (3306)

**DATE:**

06/17/2026

**DRAWING:**

SW-DD00012-B



McWane Plant & Industrial  
1201 Vanderbilt Road  
Birmingham, AL 35234

