


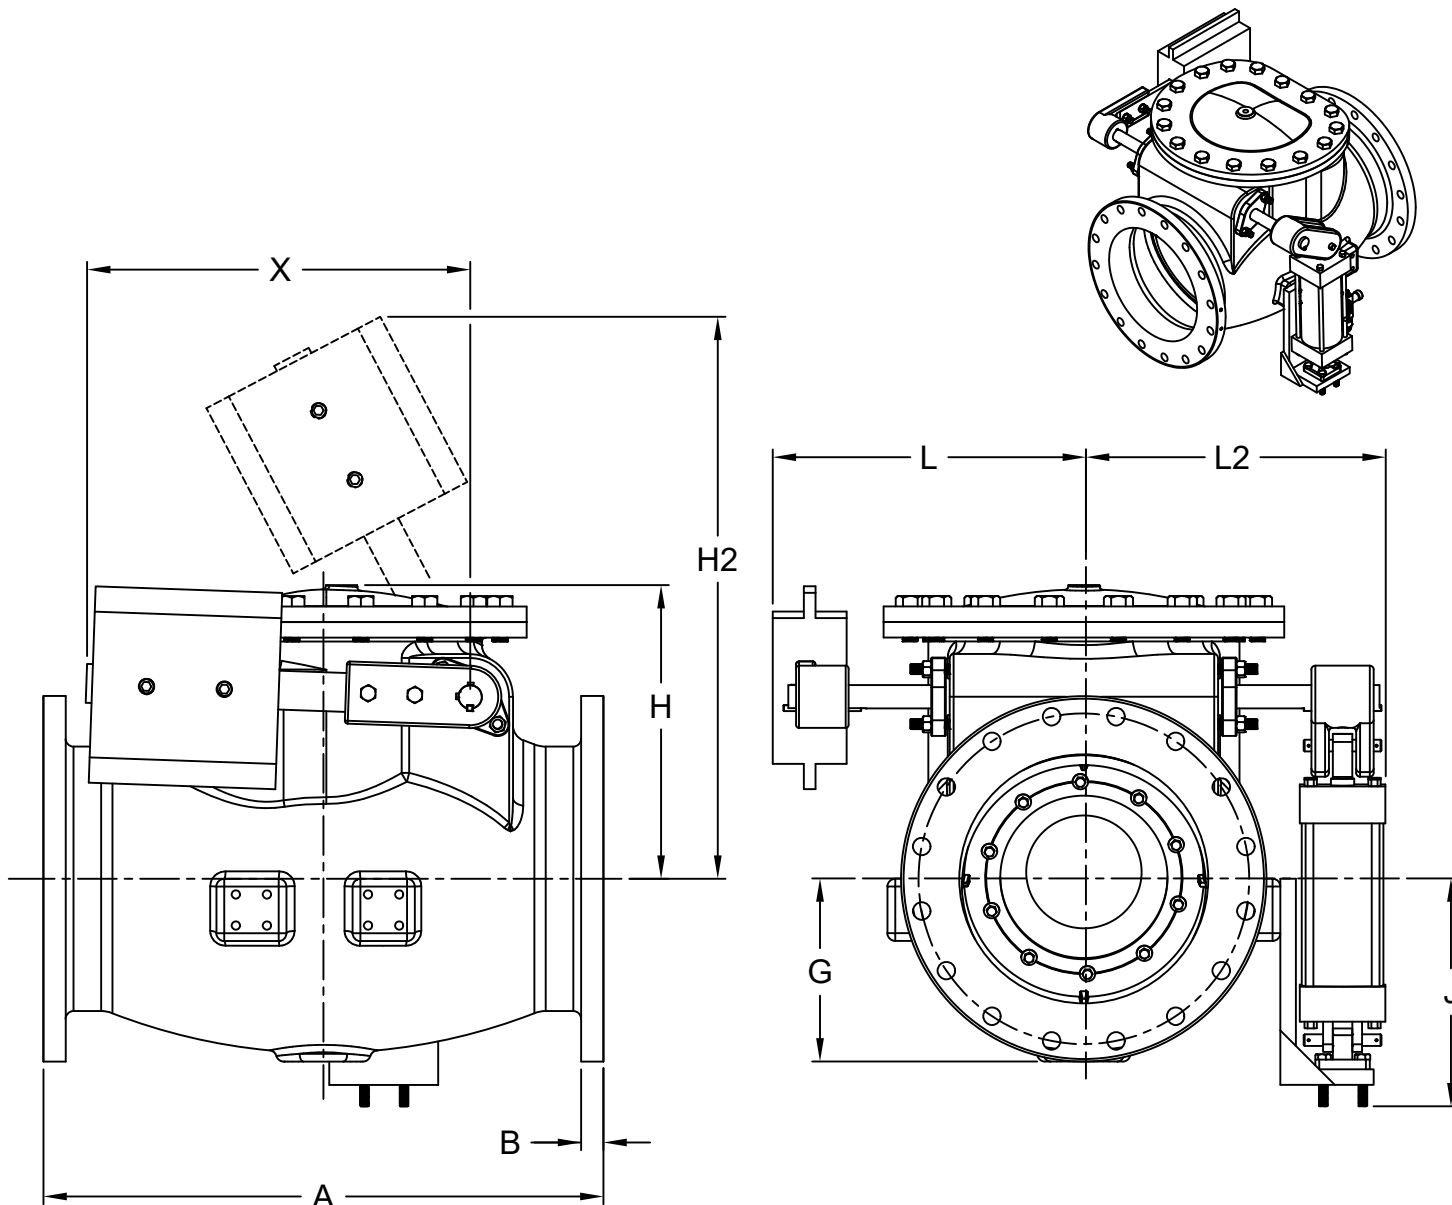

DIMENSIONS (Inches)

SIZE	A	B	C	D	E	F	G	H	H2	J	L	L2	S	X	WT (lbs)
14	31.00	1.38	21.00	12	1.12	18.75	10.75	15.97	34.87	17.63	19.00	18.50	1.25	24.70	922
16	36.00	1.44	23.50	16	1.12	21.25	11.75	18.88	36.44	14.63	20.50	19.38	1.50	24.70	1,127
18	40.00	1.56	25.00	16	1.25	22.75	12.63	20.30	43.50	15.37	22.25	21.13	1.75	30.70	1,419
20	40.00	1.69	27.50	20	1.25	25.00	14.00	20.63	44.83	15.72	22.68	24.30	1.75	30.70	1,711
24	48.00	1.88	32.00	20	1.38	29.50	17.50	24.25	53.25	12.33	27.50	27.03	2.00	36.69	2,318

NOTE:

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE - 150 PSI
3. HYDROSTATIC TEST PRESSURE - 300 PSI

DESCRIPTION:

14"-24" AWWA C508 - 125# Flanged Swing Check Valve with Air Cushion

DATE:

06/19/2026

DRAWING:

SW-DD0016-A



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

