


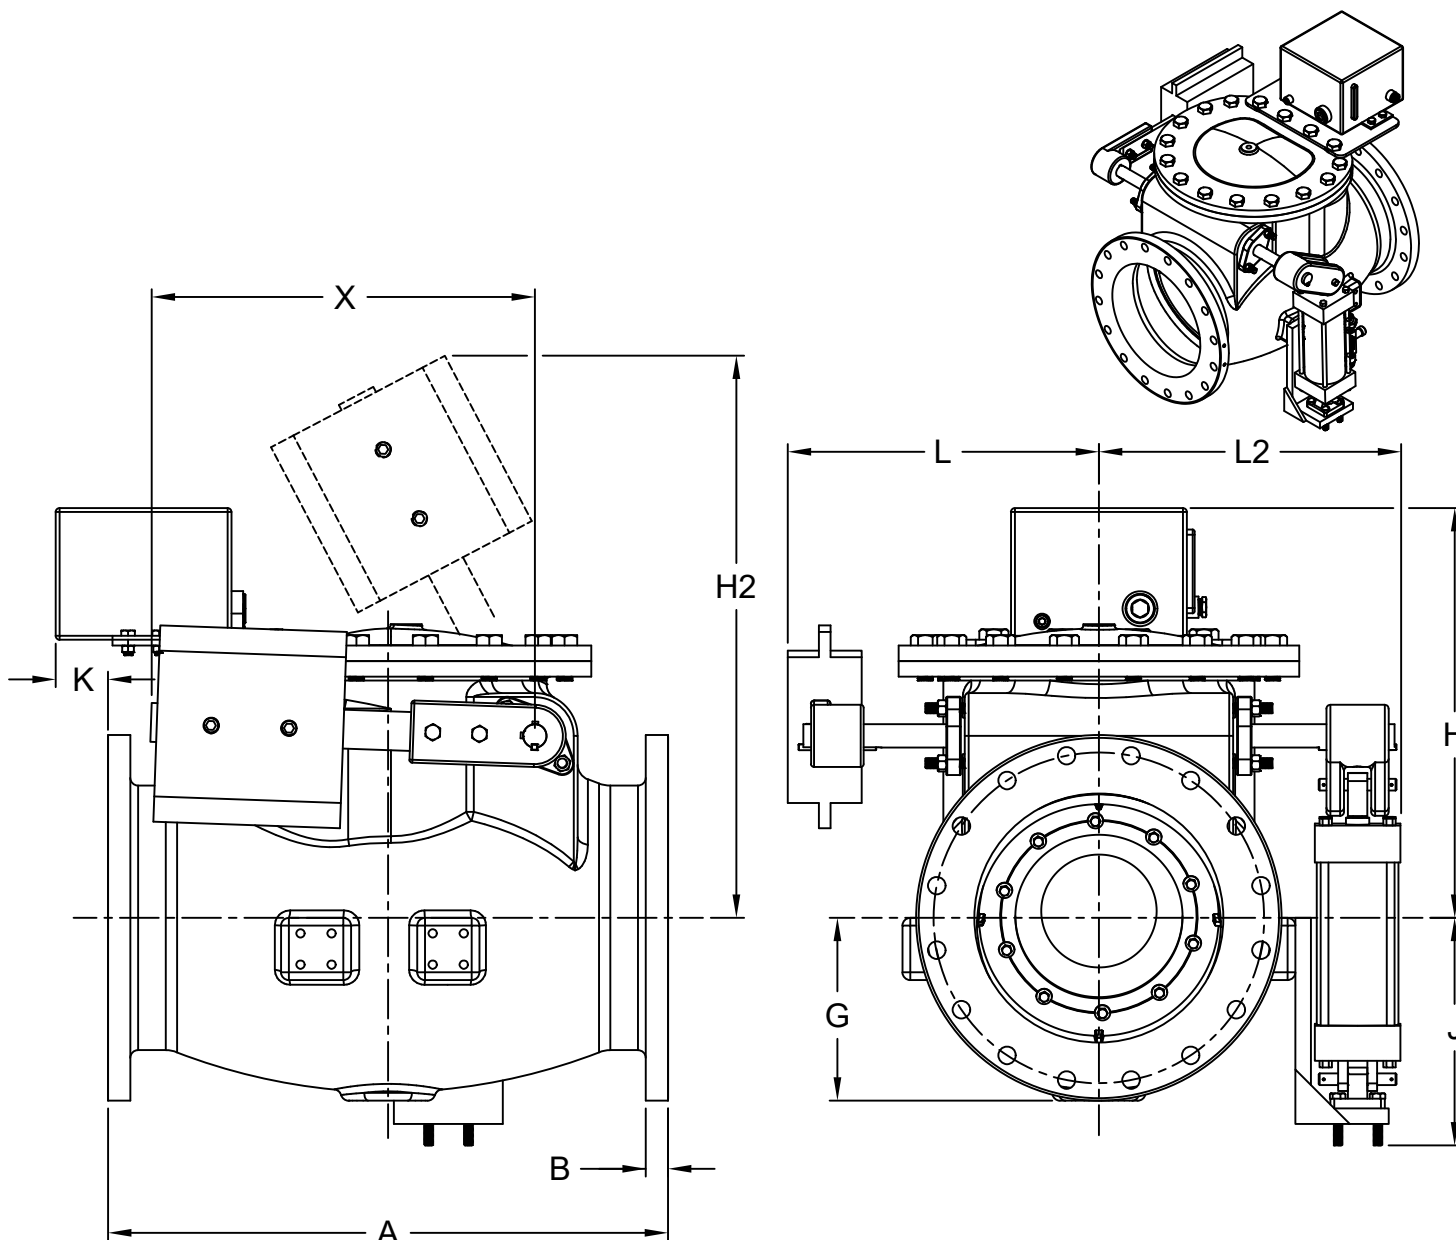

DIMENSIONS (Inches)

SIZE	A	B	C	D	E	F	G	H	H2	J	L	L2	K	S	X	WT (lbs)
14	31.00	1.38	21.00	12	1.12	18.75	10.75	24.05	34.87	17.63	19.00	18.50	4.37	1.25	24.70	959
16	36.00	1.44	23.50	16	1.12	21.25	11.75	26.34	36.44	14.63	20.50	19.38	3.36	1.50	24.70	1,164
18	40.00	1.56	25.00	16	1.25	22.75	12.63	27.25	43.50	15.37	22.25	21.13	2.71	1.75	30.70	1,456
20	40.00	1.69	27.50	20	1.25	25.00	14.00	28.02	44.83	15.72	22.68	24.30	1.72	1.75	30.70	1,748
24	48.00	1.88	32.00	20	1.38	29.50	17.50	31.53	53.25	12.33	27.50	27.03	-	2.00	36.69	2,355

NOTE:

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE - 150 PSI
3. HYDROSTATIC TEST PRESSURE - 300 PSI

DESCRIPTION:

14"-24" AWWA C508 - 125# Flanged Swing Check Valve with Oil Cushion

DATE:

06/19/2026

DRAWING:

SW-DD0017-A



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW
VALVE CO.

