
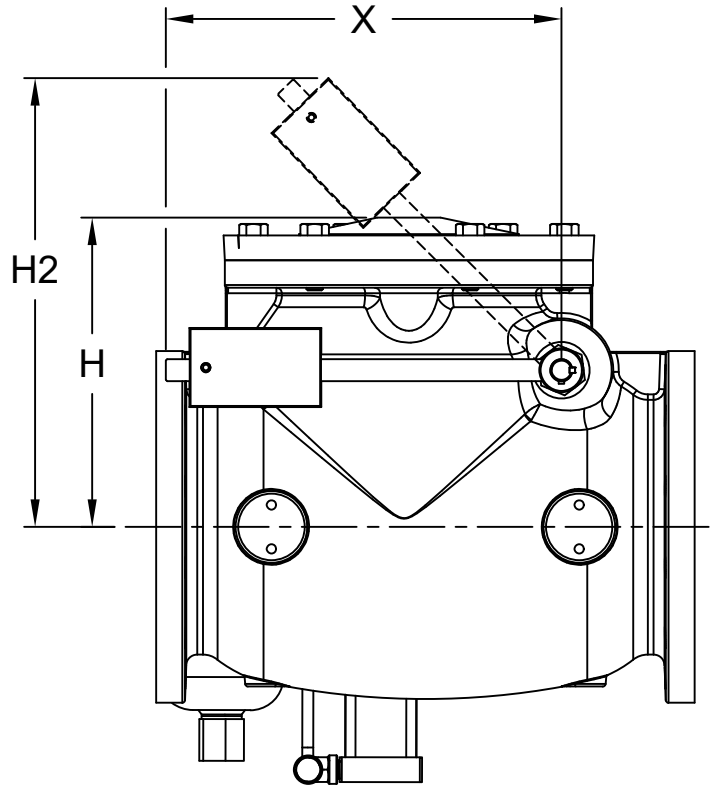
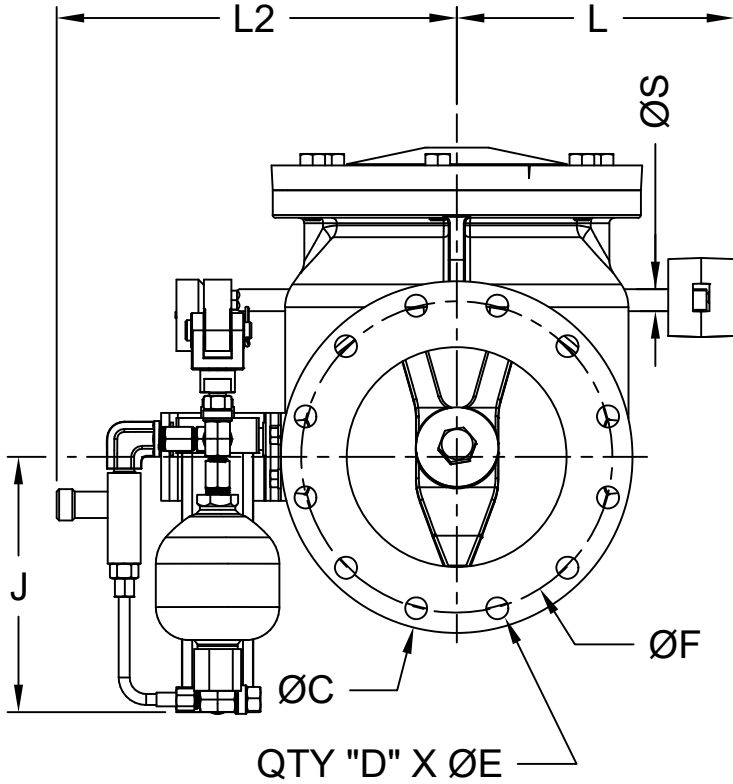


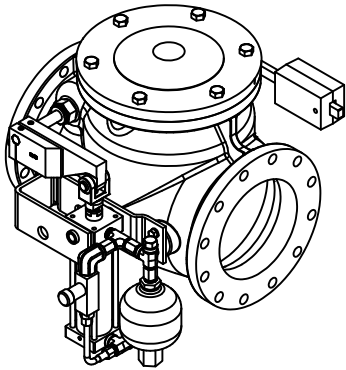

DIMENSIONS (Inches)														
SIZE	A	B	C	D	E	F	H	H2	J	L	L2	S	X	WT (lbs)
3	9.50	0.78	7.50	4	0.75	6.00	6.85	14.21	8.31	7.30	10.40	0.50	12.00	92
4	11.50	1.00	9.00	8	0.75	7.50	8.69	13.77	9.31	8.30	13.62	0.63	12.00	157
6	14.00	1.06	11.00	8	0.88	9.50	10.51	19.28	7.12	10.30	14.80	0.75	18.00	226
8	19.50	1.25	13.50	8	0.88	11.75	12.56	22.24	6.75	11.50	15.74	0.88	18.00	412
10	24.50	1.31	16.00	12	1.00	14.25	14.07	23.62	11.60	12.60	18.21	1.00	18.00	625
12	27.50	1.38	19.00	12	1.00	17.00	16.13	24.57	10.55	15.20	19.47	1.00	18.00	876

NOTE:

1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE - 200 PSI
3. HYDROSTATIC TEST PRESSURE - 400 PSI

DESCRIPTION:

3"-12" AWWA C508 - 125# Flanged Swing Check Valve - Oil Cushion (1106, AIS/BABA)

DATE:

09/15/2026

DRAWING:

SW-DD0019-A



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

