


SWING CHECK VALVES



- AWWA C508
- 2"-36"
- NSF/ANSI 61/372 CERTIFIED

MARKETS

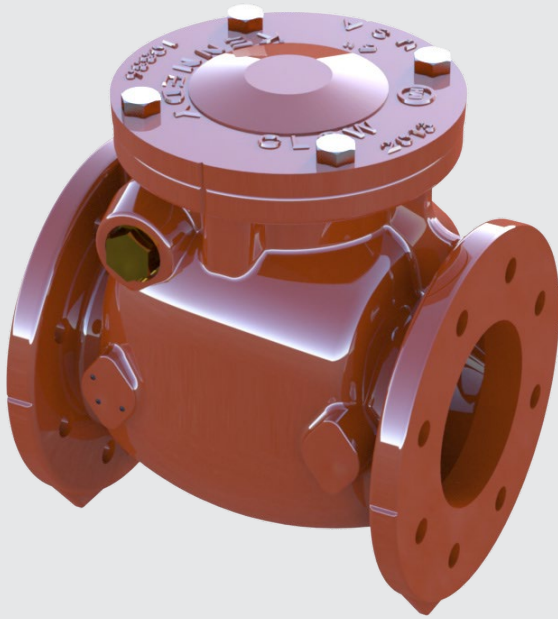

WATER/
WASTEWATER



INDUSTRIAL




AGRICULTURE

SPECIFICATIONS

Size Range	2"-36"
Materials	Cast or ductile iron body construction, bronze or resilient disc seat options, bronze body seat ring
Pressure Range	2"-12" to 250psi (globally sourced), 2"-12" to 200psi (domestic), 14"-36" to 150psi
Temperature Range	0°F-250°F
Body Style	FLG, Increasing FLG
Standards	AWWA C508, NSF/ANSI 61/372 certified
Install Orientation	Horizontal or vertical (flow up)
Featured Applications	Backflow prevention in treatment plants, pump stations, lift stations, irrigation
Water Service	Potable water, raw water, industrial wastewater, industrial water, primary effluent, secondary effluent, raw sewage, screened sewage, slurries/grit
Options	Lever & weight, lever & spring, air cushion, oil cushion, double lever arms, limit switch




ENGINEERING FEATURES

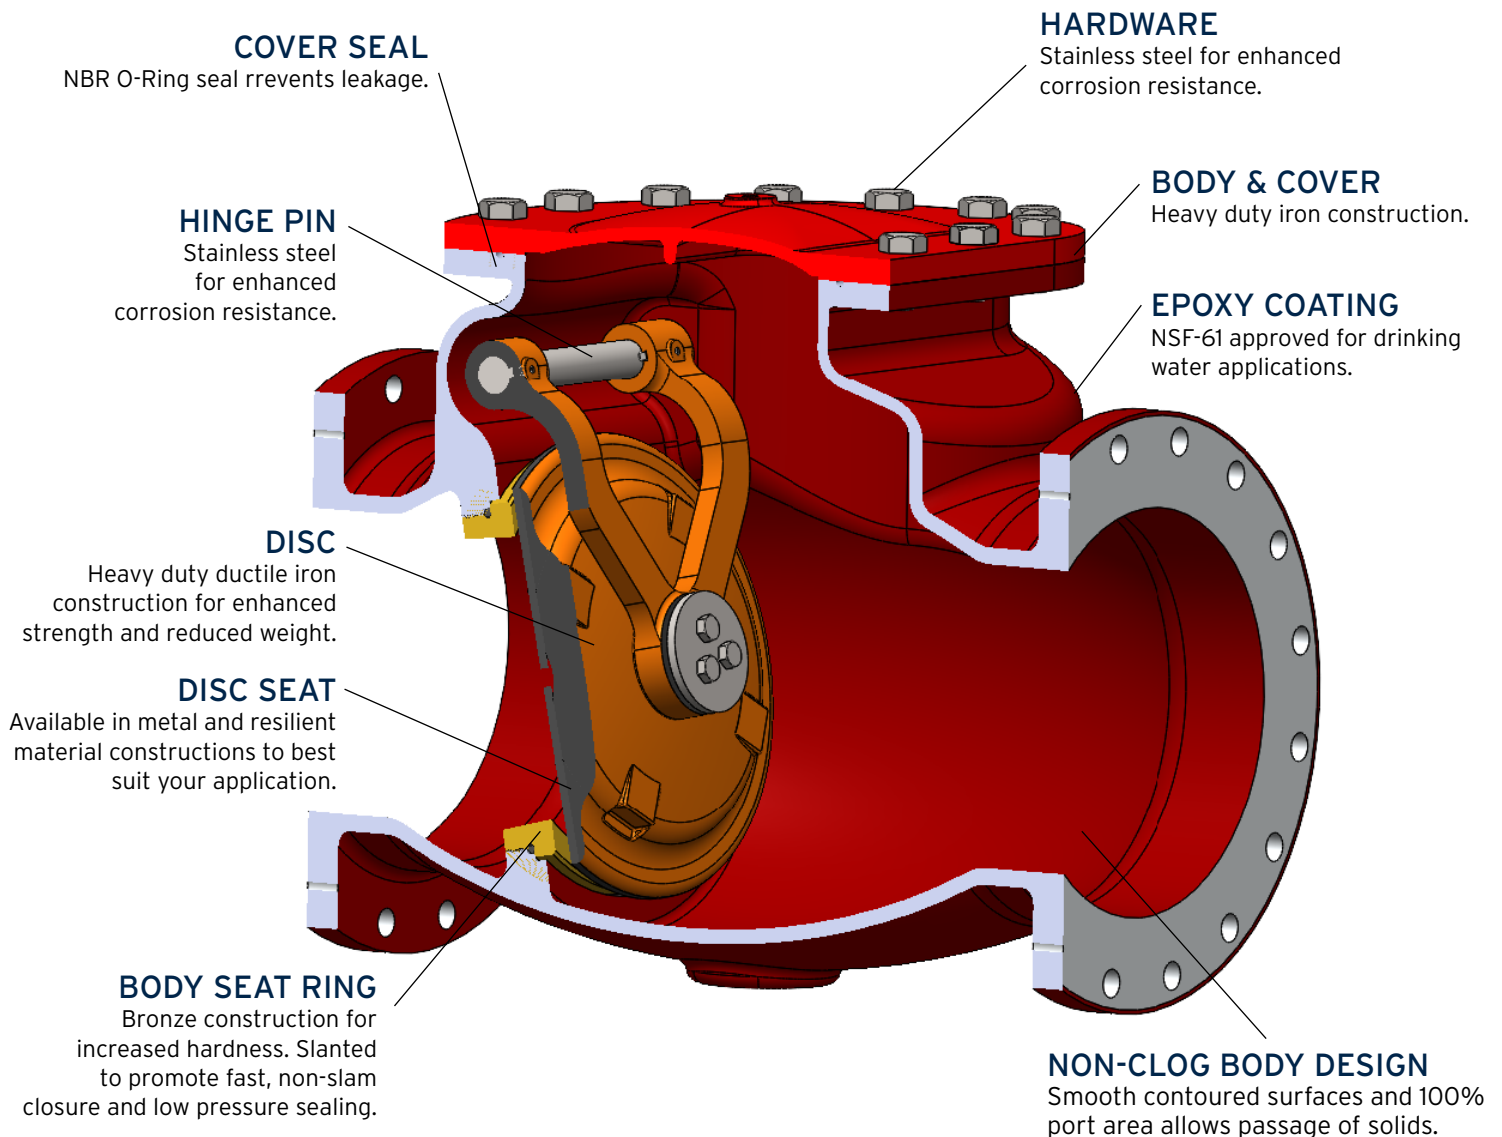


LEVER & WEIGHT



LEVER & SPRING



AIR CUSHION

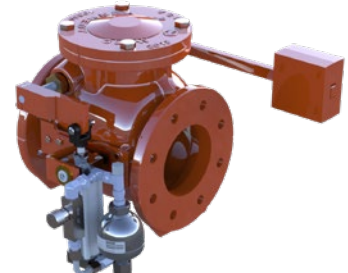

SIDE-MOUNTED AIR CUSHION

This document is provided for general informational purposes only and is not intended to define or represent the scope of supply, configuration, or origin of any product. Images, drawings, diagrams, photographs, and specifications may depict optional features or representative designs and are subject to change without notice. Nothing contained herein shall be deemed to create or extend any warranty, express or implied. All products are sold subject exclusively to McWane Plant & Industrial's standard Terms and Conditions of Sale.



MPI - MCWANE PLANT & INDUSTRIAL
1201 Vanderbilt Road, Birmingham, AL 35234
866.924.8674 • mcwanepi.com • sales@mcwanepi.com