


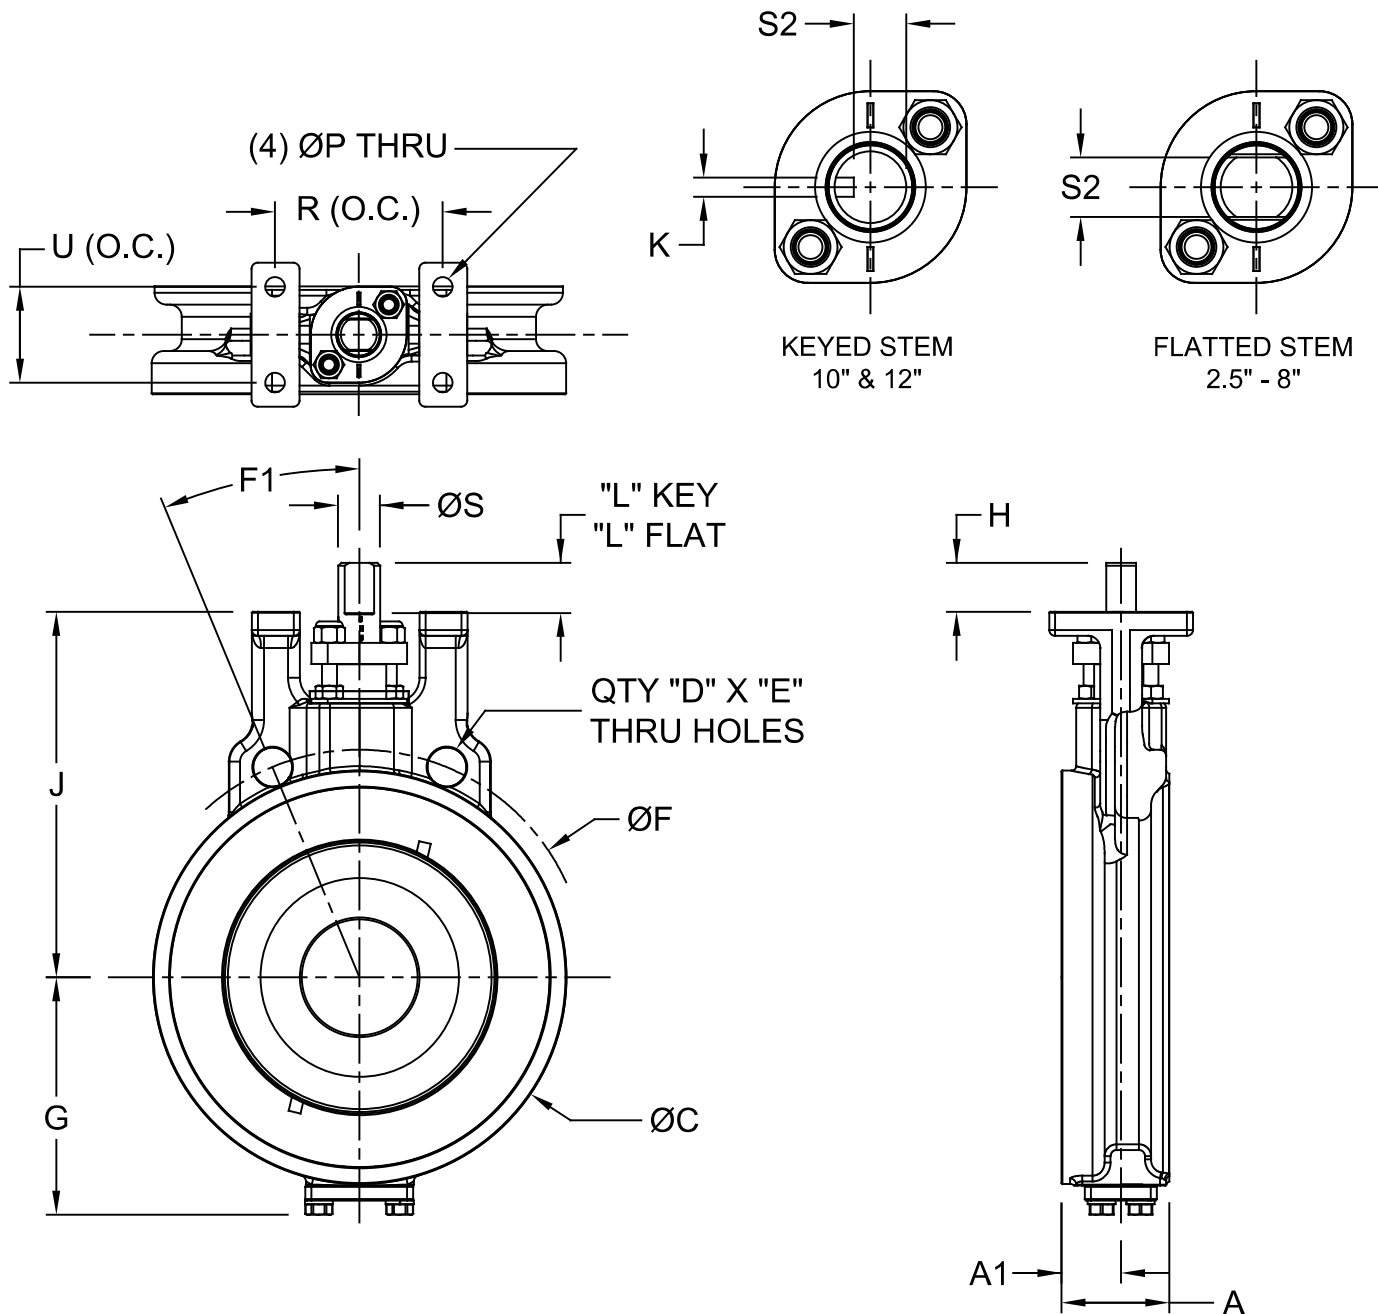

DIMENSIONS (Inches)

SIZE	A	A1	C	D	E	F	F1	G	H	J	K	L	P	R	S	S2	U	WT (lbs)
2.5	1.88	1.06	4.69	2	0.69	5.50	45.00	3.00	1.00	4.75	-	1.078	0.344	3.25	0.56	0.38	1.50	10
3	1.88	1.06	5.19	2	0.69	6.00	45.00	3.25	1.00	5.13	-	1.078	0.344	3.25	0.56	0.38	1.50	12
4	2.13	1.06	6.50	2	0.69	7.50	22.50	3.94	1.00	6.25	-	1.078	0.406	3.50	0.63	0.50	2.00	16
5	2.25	1.25	7.56	2	0.81	8.50	22.50	4.56	1.00	7.06	-	1.078	0.406	3.50	0.88	0.63	2.00	25
6	2.25	1.25	8.63	2	0.81	9.50	22.50	5.00	1.00	7.63	-	1.828	0.406	3.50	0.88	0.63	2.00	30
8	2.50	1.44	10.81	2	0.81	11.75	22.50	6.19	1.75	9.63	-	1.828	0.563	4.00	1.13	0.88	2.56	50
10	2.81	1.63	12.88	2	0.94	14.25	15.00	7.25	2.94	10.22	0.25	2.25	0.563	4.75	1.13	0.984	3.25	80
12	3.19	1.75	15.25	2	0.94	17.00	15.00	8.75	3.00	11.94	0.38	2.25	0.688	5.00	1.25	1.033	3.50	150

NOTE:

- FLANGES CONFORM TO ASME B16.5 CLASS 150
- COLD WORKING PRESSURE:
285 PSIG (A216 GR. WCB)
275 PSIG (A351 GR. CF8M)
- HYDROSTATIC TEST PRESSURE:
450 PSIG (A216 GR. WCB)
425 PSIG (A351 GR. CF8M)

DESCRIPTION:

2.5"-12" API 609, 150# Wafer Body Bare Stem
High Performance BFV, AIS

DATE:

07/29/26

DRAWING:

TS-DD0026-A



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234