


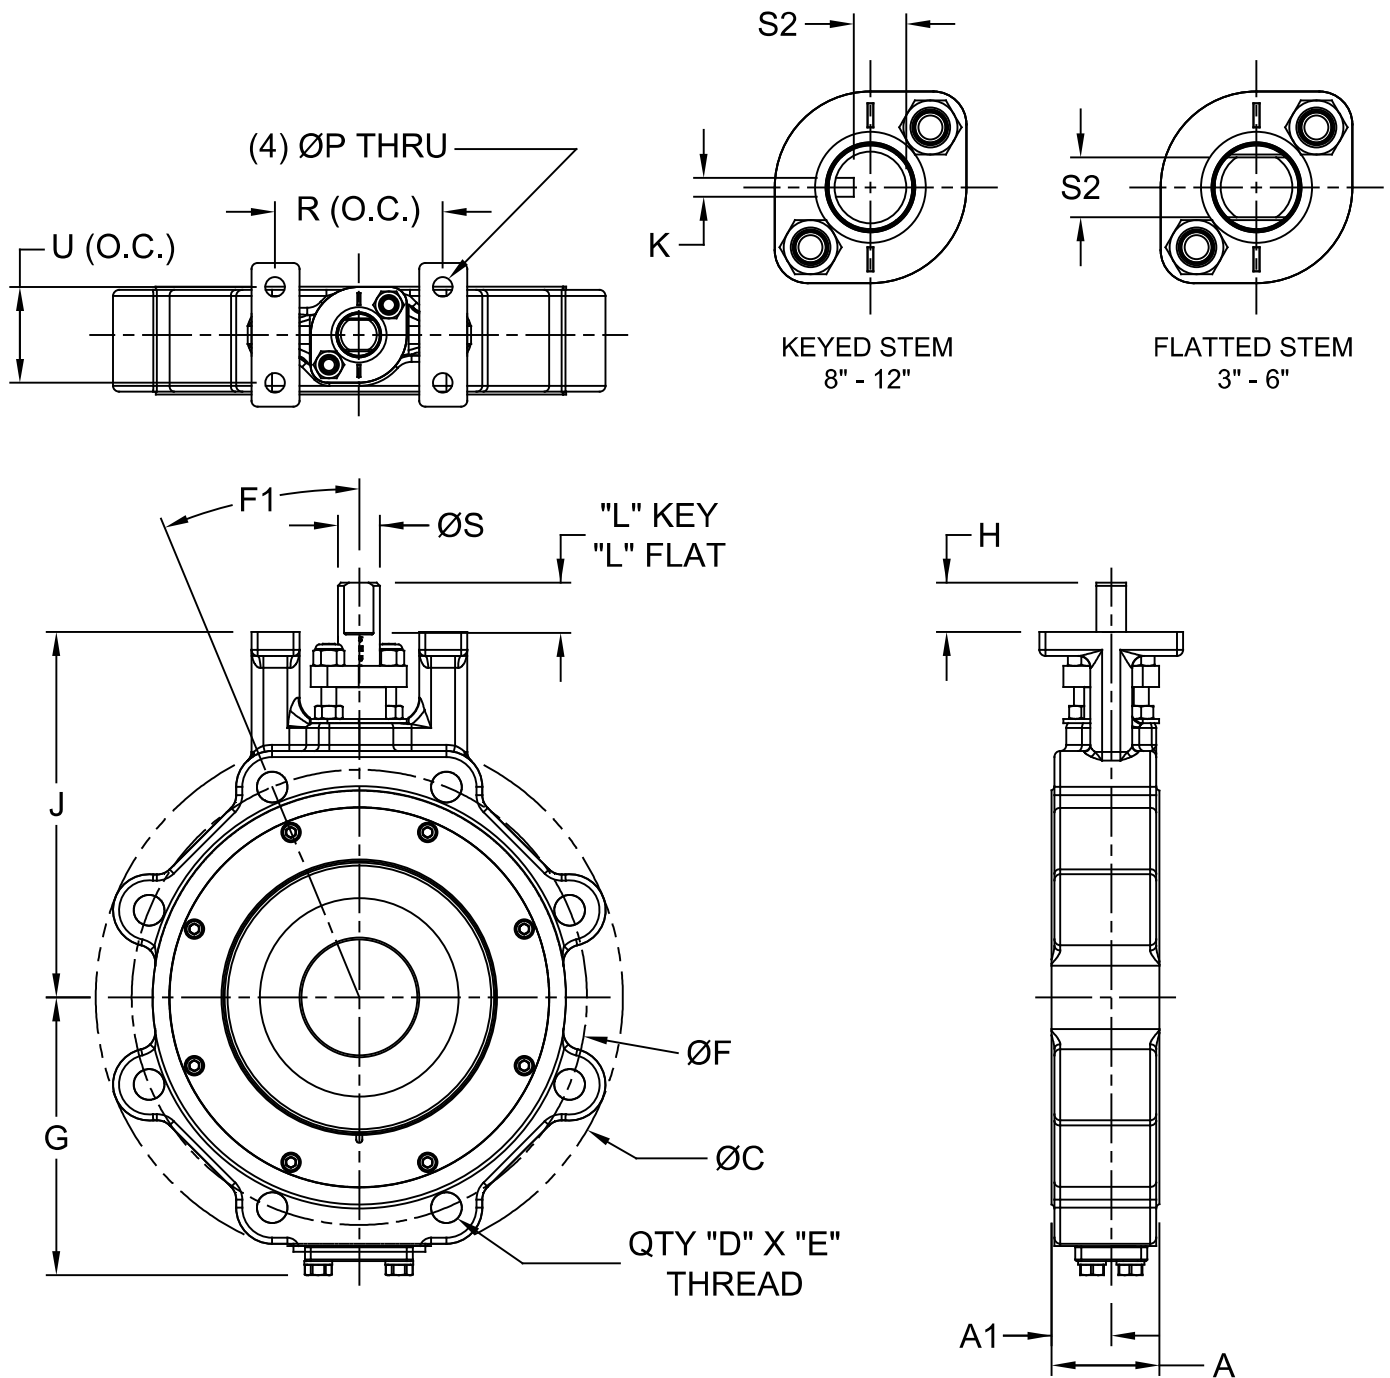

DIMENSIONS (Inches)																			
SIZE	A	A1	C	D	E	F	F1	G	H	J	K	L	P	R	S	S2	U	WT (lbs)	
3	1.88	1.06	8.25	8	3/4"-10	6.63	22.50	5.75	1.00	5.81	-	1.078	0.344	3.25	0.56	0.38	1.50	23	
4	2.13	1.06	9.38	8	3/4"-10	7.88	22.50	6.69	1.00	6.75	-	1.078	0.406	3.50	0.63	0.50	2.00	30	
6	2.31	1.25	12.00	12	3/4"-10	10.63	15.00	7.88	1.00	8.25	-	1.078	0.406	3.50	0.88	0.63	2.00	50	
8	2.88	1.61	15.00	12	7/8"-9	13.00	15.00	9.50	2.31	10.25	0.38	2.38	0.563	4.75	1.25	1.03	3.25	80	
10	3.25	1.56	17.50	16	1"-8	15.25	11.25	12.19	3.00	12.81	0.38	3.00	0.563	4.75	1.38	1.16	3.25	125	
12	3.63	2.00	20.50	16	1 1/8"-8	17.75	11.25	15.31	3.00	15.00	0.38	2.75	0.688	6.25	1.75	1.53	4.75	240	

NOTE:

- FLANGES CONFORM TO ASME B16.5 CLASS 300
- COLD WORKING PRESSURE:
740 PSIG (A216 GR. WCB)
720 PSIG (A351 GR. CF8M)
- HYDROSTATIC TEST PRESSURE:
1125 PSIG (A216 GR. WCB)
1100 PSIG (A351 GR. CF8M)

DESCRIPTION:

3"-12" API 609, 300# Lug Body Bare Stem High Performance BFV, AIS

DATE:

07/29/26

DRAWING:

TS-DD0027-A



McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234