

PF-25 FLAP GATE

SIZES 4" TO 24", FLANGE OR WALL MOUNTING, FOR DRAINAGE OR PUMP DISCHARGE

FEATURES

- Suitable for 25-feet seating head
- 7.5-degree angle ensures positive closure
- ANSI 125# flanged connection
- Iron cover with neoprene seat


OPTIONS

- Counterweight options - consult factory





MATERIALS OF CONSTRUCTION

Number	Name	Material
1	Frame	Cast Iron ASTM A126 Class B
2	Cover	Cast Iron ASTM A126 Class B
3	Hinge Pin	Stainless Steel 316
4	Washer	Stainless Steel 316
5	Spring Pin	Stainless Steel 316
6	Seat	Neoprene ASTM D-2000

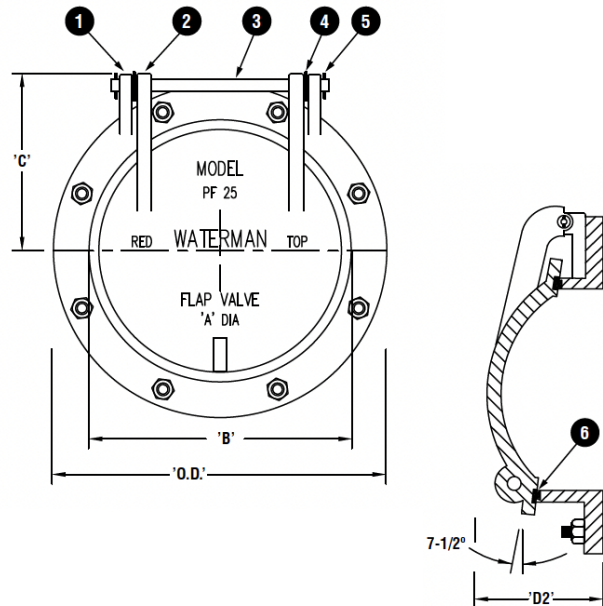

DIMENSIONS AND PARTS LIST

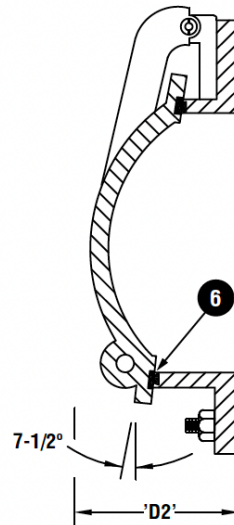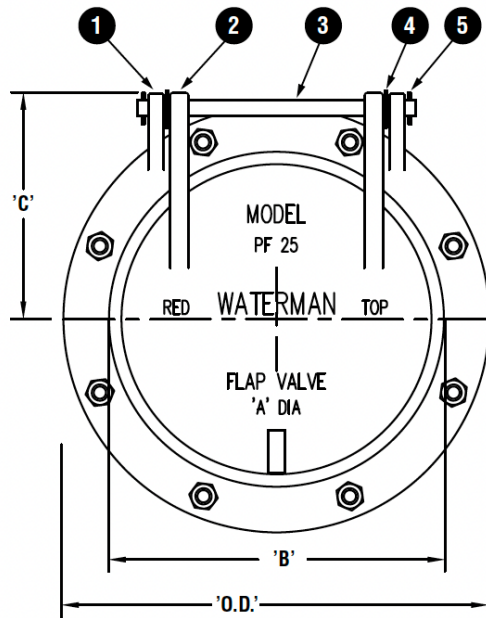

DIMENSIONS FOR FLANGE BACK

Size	C	D2	O.D.
4	4 5/8	6 1/4	9
6	5 11/16	7 5/8	11
8	6 7/8	8	13 1/2
10	8 1/8	8	16
12	9 3/8	8 1/2	19
14	10 7/16	10 1/2	21
16	11 5/8	10 1/2	23 1/2
18	12 1/8	10 1/2	25
20	13 3/8	11	27 1/2
24	15 1/2	11	32

PARTS LIST

Number	Name
1	Frame
2	Cover
3	Hinge Pin
4	Washer
5	Spring Pin
6	Seat

This document is provided for general informational purposes only and is not intended to define or represent the scope of supply, configuration, or origin of any product. Images, drawings, diagrams, photographs, and specifications may depict optional features or representative designs and are subject to change without notice. Nothing contained herein shall be deemed to create or extend any warranty, express or implied. All products are sold subject exclusively to McWane Plant & Industrial's standard Terms and Conditions of Sale.



MPI - MCWANE PLANT & INDUSTRIAL
1201 Vanderbilt Road, Birmingham, AL 35234
866.924.8674 • mcwanepi.com • sales@mcwanepi.com

REV 6/26